

0070321

DOE/RL-2006-01

Revision 0

Radionuclide Air Emissions Report for the Hanford Site, Calendar Year 2005

L. P. Diediker
D. J. Rokkan
Fluor Hanford, Inc.

K. Rhoads
L. H. Staven
Pacific Northwest National Laboratory
Date Published
June 2006

Prepared for the U.S. Department of Energy
Assistant Secretary for Environmental Management



**United States
Department of Energy**
P.O. Box 550
Richland, Washington 99352

RECEIVED
AUG 07 2006

EDMC

J. E. Cardel 6/8/2006
Release Approval Date

**Approved for Public Release;
Further Dissemination Unlimited**

TRADEMARK DISCLAIMER

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

This report has been reproduced from the best available copy.
Available in paper copy.

Printed in the United States of America

RADIONUCLIDE AIR EMISSIONS REPORT FOR THE HANFORD SITE, CALENDAR YEAR 2005

ABSTRACT

This report documents radionuclide air emissions from the U.S. Department of Energy (DOE) Hanford Site in 2005 and the resulting highest effective dose equivalent (EDE) to a member of the public, referred to as the maximally exposed individual (MEI). The report has been prepared in compliance with the Code of Federal Regulations (CFR), Title 40, Protection of the Environment, Part 61, National Emission Standards for Hazardous Air Pollutants (NESHAP), Subpart H, "National Emission Standards for Emissions of Radionuclides Other than Radon from Department of Energy Facilities" and Washington Administrative Code (WAC) Chapter 246-247, "Radiation Protection-Air Emissions," as well as in accordance with the quality principles of 10 CFR 830, Nuclear Safety Management; DOE Order 414.1A, Quality Assurance, "Contractor Requirements Document"; NQA-1, Quality Assurance Requirements for Nuclear Facility Application; and EPA QA/R-5, Requirements for Quality Assurance Project Plans.

Federal regulations in Subpart H of 40 CFR 61 require the measurement and reporting of radionuclides emitted from DOE facilities and the resulting public dose from those emissions. A standard of 10 mrem/yr EDE is not to be exceeded. Washington State adopted the 40 CFR 61 standard of 10 mrem/yr EDE into their regulations, which require that the EDE to the MEI be calculated from both point source emissions and from diffuse and fugitive sources of emissions. WAC 246-247 requires the reporting of radionuclide emissions from all Hanford Site sources during routine as well as nonroutine operations.

On December 15, 1989, EPA promulgated the radionuclide NESHAP regulations, weighted toward the measurement of point source emissions. Thereafter, DOE sites began developing methods for estimating the dose consequences from diffuse and fugitive emissions. In accordance with a Memorandum of Understanding (DOE, 1995) between DOE and EPA, dose estimates from diffuse and fugitive emissions have been included when determining the state of Hanford Site compliance with the 10 mrem/yr EDE dose standard in 40 CFR Part 61, Subpart H, as well as in WAC 246-247.

The EDE to the MEI due to routine and nonroutine emissions in 2005 from Hanford Site point sources was 0.018 mrem (0.00018 mSv), or 0.18 percent of the federal standard. The EDE from diffuse and fugitive emissions at the Hanford Site in 2005 was 0.021 mrem (0.00021 mSv). The total dose from point sources and from diffuse and fugitive sources of radionuclide emissions during 2005 was 0.039 mrem (0.00039 mSv) EDE, or 0.39 percent of the federal and state standard of 10 mrem/yr.

The portions of the Hanford Site MEI dose attributable to individual point sources, as listed in Section 2.0, are appropriate for demonstrating the compliance status of abated stack emissions with applicable terms of the Hanford Site Air Operating Permit and of Notices of Construction.

For further information concerning this report, you may contact Ms. Mary F. Jarvis, of the DOE-Richland Operations Office, by telephone at (509) 376-2256 or by e-mail at Mary_F_Jarvis@rl.gov.

This page intentionally left blank.

CONTENTS

TERMS	xi
1.0 INTRODUCTION.....	1-1
1.1 HANFORD SITE DESCRIPTION	1-1
1.1.1 Historical Background	1-1
1.1.2 Main Areas, Facilities, and Activities	1-1
1.1.3 Prime Contractors.....	1-4
1.2 POINT SOURCE DESCRIPTIONS	1-5
1.2.1 General Description and Reporting Criteria.....	1-5
1.2.2 100 Areas Facilities.....	1-6
1.2.2.1 100-N Area.....	1-6
1.2.2.2 100-K East and West Areas	1-6
1.2.3 200 East Area Facilities	1-7
1.2.3.1 Plutonium-Uranium Extraction Facility.....	1-7
1.2.3.2 B Plant Complex	1-7
1.2.3.3 Waste Encapsulation and Storage Facility	1-7
1.2.3.4 244-AR and 244-CR Vaults	1-7
1.2.3.5 200 East Area Tank Farms.....	1-8
1.2.3.6 242-A Evaporator	1-9
1.2.3.7 200 Area Effluent Treatment Facility	1-9
1.2.3.8 Canister Storage Building	1-9
1.2.3.9 209-E Critical Mass Laboratory	1-9
1.2.4 200 West Area Facilities	1-10
1.2.4.1 Reduction-Oxidation Plant.....	1-10
1.2.4.2 T Plant Complex	1-10
1.2.4.3 U Plant.....	1-10
1.2.4.4 Plutonium Finishing Plant.....	1-10
1.2.4.5 200 West Area Tank Farms.....	1-11
1.2.4.6 200 West Area Evaporators	1-12
1.2.4.7 222-S Laboratory	1-12
1.2.4.8 Waste Verification and Sampling Facility	1-12
1.2.4.9 Waste Receiving and Processing Facility	1-12
1.2.5 300 Area Facilities	1-12
1.2.5.1 305-B Hazardous Waste Storage Building.....	1-12
1.2.5.2 306-W Materials Development Laboratory	1-13
1.2.5.3 340 Complex	1-13
1.2.5.4 318 Radiological Calibrations Laboratory	1-13
1.2.5.5 320 Analytical and Nuclear Research Laboratory	1-13
1.2.5.6 323 Mechanical Properties Laboratory	1-14
1.2.5.7 324 Waste Technology Engineering Laboratory	1-14
1.2.5.8 325 Radiochemical Processing Laboratory.....	1-14
1.2.5.9 326 Materials Sciences Laboratory	1-14
1.2.5.10 327 Post-Irradiation Testing Laboratory	1-14
1.2.5.11 329 Chemical Sciences Laboratory.....	1-15
1.2.5.12 331 Life Sciences Laboratory	1-15
1.2.5.13 3730 Gamma Irradiation Facility	1-15
1.2.5.14 Radiological Counting Facility	1-15
1.2.6 400 Area Facilities	1-15
1.2.6.1 Fast Flux Test Facility.....	1-15
1.2.6.2 Maintenance and Storage Facility	1-16

1.2.7	600 Area Facilities	1-16
1.2.7.1	Waste Sampling and Characterization Facility	1-16
2.0	RADIONUCLIDE AIR EMISSION DATA ON POINT SOURCES	2-1
3.0	POINT SOURCE EMISSION DOSE ASSESSMENTS	3-1
3.1	DESCRIPTION OF POINT SOURCE EMISSIONS DOSE MODEL.....	3-1
3.2	SUMMARY OF INPUT PARAMETERS	3-1
3.3	COMPLIANCE ASSESSMENT	3-4
3.3.1	40 Code of Federal Regulations 61, Subpart H, Regulatory Standard.....	3-4
3.3.2	Washington Administrative Code 246-247 Regulatory Standard.....	3-4
3.4	METEOROLOGICAL DATA.....	3-9
3.5	NONROUTINE RELEASES OF RADIONUCLIDES TO THE ATMOSPHERE.....	3-10
3.6	ADDITIONAL INFORMATION.....	3-10
3.6.1	Applicability of Stack Emissions Data to Air Operating Permit and Notices of Construction	3-10
3.6.2	Construction Projects and Modifications Exempted from 40 CFR 61.96.....	3-10
3.6.3	Radon-220 and Radon-222 Emissions	3-10
3.7	CERTIFICATION.....	3-11
4.0	DIFFUSE AND FUGITIVE SOURCES OF EMISSIONS	4-1
4.1	DIFFUSE AND FUGITIVE EMISSIONS MONITORING.....	4-2
4.1.1	Near-Facility Environmental Monitoring.....	4-2
4.1.2	Surface Environmental Surveillance.....	4-3
4.2	ESTIMATED DOSES FROM DIFFUSE AND FUGITIVE EMISSIONS	4-5
4.2.1	Dose Assessment Method	4-5
4.2.2	Results of Dose Assessment.....	4-7
4.2.3	Estimate of Uncertainty in Dose Assessment	4-9
4.2.4	Discussion of Bias in Dose Assessment.....	4-10
4.3	DIFFUSE AND FUGITIVE EMISSION SOURCES.....	4-10
4.3.1	Description of Diffuse and Fugitive Emission Sources	4-11
4.3.1.1	Crib.....	4-12
4.3.1.2	Ditch.....	4-12
4.3.1.3	Trench	4-12
4.3.1.4	Retention Basin	4-12
4.3.1.5	Diversion Box	4-12
4.3.1.6	Valve Pit.....	4-13
4.3.1.7	French Drain and Reverse Well	4-13
4.3.1.8	Tank	4-13
4.3.1.9	Burial Ground.....	4-13
4.3.1.10	Deactivation, Decontamination, and Decommissioning Activities.....	4-13
4.3.1.11	Waste Site Characterization and Cleanup Activities.....	4-14
4.3.1.12	Outdoor Radioactive Surface Contamination Areas	4-14
4.3.1.13	Structures with Radioactive Contamination.....	4-14
4.3.2	Description of Specific Diffuse and Fugitive Emission Sources	4-14
4.3.2.1	100 Areas Inactive Reactor Sites	4-15
4.3.2.2	100-K Area Basins	4-15
4.3.2.3	200 Area Facilities and Sites.....	4-16
4.3.2.4	Plutonium-Uranium Extraction Facility.....	4-16
4.3.2.5	Uranium-Trioxide Plant	4-16
4.3.2.6	Reduction-Oxidation Plant.....	4-16
4.3.2.7	Plutonium Finishing Plant.....	4-16
4.3.2.8	T Plant Complex	4-18
4.3.2.9	224-T Building.....	4-20
4.3.2.10	B Plant Complex	4-20

4.3.2.11	Waste Encapsulation and Storage Facility	4-20
4.3.2.12	200 Area Interim Storage Area (at CSB)	4-20
4.3.2.13	222-S Laboratory Complex.....	4-21
4.3.2.14	Waste Verification and Sampling Facility	4-23
4.3.2.15	Waste Receiving and Processing Facility	4-23
4.3.2.16	Central Waste Complex	4-23
4.3.2.17	Tank Farms.....	4-24
4.3.2.18	242-A Evaporator.....	4-25
4.3.2.19	242-S Evaporator	4-25
4.3.2.20	242-T Evaporator	4-26
4.3.2.21	Grout Treatment Facility.....	4-26
4.3.2.22	Low-Level Burial Grounds and Environmental Restoration Disposal Facility	4-26
4.3.2.23	340 Complex.....	4-28
4.3.2.24	300 Area Fuel Supply Facility	4-29
4.3.2.25	Fast Flux Test Facility.....	4-32
4.3.2.26	Waste Sampling and Characterization Facility Ancillary Facilities.....	4-32
4.3.2.27	Purgewater Storage Tanks.....	4-33
5.0	SUPPLEMENTAL INFORMATION.....	5-1
5.1	POPULATION DOSE ESTIMATE.....	5-1
5.2	COMPLIANCE STATUS WITH 40 CODE OF FEDERAL REGULATIONS PART 61, SUBPARTS Q AND T	5-1
5.3	EMISSION ESTIMATES AND PERIODIC CONFIRMATORY MEASUREMENT DATA FOR SPECIFIC NOTICES OF CONSTRUCTION	5-2
5.3.1	Sitewide Notices of Construction for Portable Exhausters	5-2
5.3.2	Miscellaneous Periodic Confirmatory Emission Measurements.....	5-3
5.3.3	Periodic Confirmatory Measurements on Notice of Construction Sources	5-4
5.4	AMBIENT AIR SAMPLING MEASUREMENTS.....	5-12
5.5	QUALITY ASSURANCE PROGRAM COMPLIANCE STATUS.....	5-31
6.0	REFERENCES.....	6-1

APPENDIX

APPENDIX A: DOSE MODELING METEOROLOGICAL DATA.....	APP A-i
APPENDIX B: ERRATA.....	APP B-i
B.1 CORRECTIONS TO EMISSIONS DATA FOR TWO CH2M HILL STACKS, CALENDAR YEAR 2004	APP B-1
B.1.1 WDOH Notices of Correction for CH2M HILL Emission Units 296-P-43 and 296-B-28	APP B-1
B.1.1.1 AUDIT #430, Emission Unit 241-S-112 (i.e., 296-P-43)	APP B-1
B.1.1.2 AUDIT #445, Emission Unit 296-B-28).....	APP B-2
B.2 CORRECTION TO 296-Z-14 STACK FLOW AND ASSOCIATED VALUES, CALENDAR YEAR 2004	APP B-2
B.3 CORRECTION TO TABLES OF AVERAGE DISPERSION FACTORS, CALENDAR YEAR 2004	APP B-3

FIGURES

Figure 1-1. Hanford Site Map.....	1-2
Figure 1-2. 100-K Area Emission Point Sources.....	1-17
Figure 1-3. 200 East Area Emission Point Sources.....	1-18
Figure 1-4. 200 West Area Emission Point Sources.....	1-19
Figure 1-5. 300 Area Emission Point Sources.....	1-20
Figure 1-6. 400 Area Emission Point Sources.....	1-21
Figure 3-1. Locations of Hanford Site Maximally Exposed Individual and Other Evaluated Receptor Locations for 2005.....	3-3
Figure 3-2. Doses to the MEI Due to Point Source Emissions of Radionuclides from the Hanford Site, 1990 through 2005.....	3-9
Figure 4-1. Historical Impact on Gross Beta Radioactivity in Hanford Site Ambient Air Samples, 1979 through 1990 (PNL-7346).....	4-2
Figure 4-2. Near-Facility Ambient Air Sampling Locations.....	4-4
Figure 4-3. Environmental Surveillance Ambient Air Sampling Locations.....	4-6

TABLES

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005 (major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)	2-2
Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005 (minor point source: potential of ≤0.1 mrem/yr EDE to nearest public receptor)	2-9
Table 2-3. Hanford Site Major Stack Heights and Emission Controls.....	2-15
Table 2-4. Hanford Site Minor Stack Heights and Emission Controls.....	2-16
Table 2-5. Distances and Directions from Hanford Site Operational Areas to Receptors at Respective Nearest Residences. ^a	2-18
Table 3-1. Hanford Site Radionuclide Air Emissions from Point Sources in 2005.	3-2

Table 3-2. CAP88-PC Effective Dose Equivalent Estimates for the Maximally Exposed Individual at Sagemoor Road, Resulting from Hanford Site Point Source Radionuclide Air Emissions in 2005.	3-5
Table 3-3. Doses from Hanford Site Major Point Sources that Operated in 2005.	3-6
Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2005.	3-7
Table 3-5. Emissions of ^{220}Rn and ^{222}Rn from the 325 Building, 300 Area, in 2005.	3-10
Table 4-1. Estimated Hanford Site Diffuse and Fugitive Emissions and Resulting Effective Dose Equivalents for 2005.	4-8
Table 4-2. Soil and Underground Contamination Areas at the Hanford Site in 2005.	4-15
Table 5-1. Emission Estimates for Portable/Temporary Radioactive Air Emission Units in 2005.	5-2
Table 5-2. HEPA-Filtered Vacuum Usage for 2005.	5-3
Table 5-3. Nondestructive Analysis Results for 2005.	5-3
Table 5-4. Destructive Analysis Results for 2005.	5-3

This page intentionally left blank.

TERMS

ALE	Fitzner Eberhardt Arid Lands Ecology Reserve
BHI	Bechtel Hanford, Inc.
BNI	Bechtel National, Inc.
Bq	becquerel
CAM	continuous air monitor
CAP88-PC	Clean Air Act Assessment Package 1988-Personal Computer
CFR	Code of Federal Regulations
CH2M HILL	CH2M HILL Hanford Group, Inc.
Ci	curie
CSB	Canister Storage Building
CVDF	Cold Vacuum Drying Facility
CWC	Central Waste Complex
D&D	decontamination and decommissioning
DCRT	double-contained receiver tank
DOE	U.S. Department of Energy
DOE-RL	U.S. Department of Energy-Richland Operations Office
DOE-ORP	U.S. Department of Energy, Office of River Protection
DST	double-shell tank
EDE	effective dose equivalent
EDP	electronic data processing
ENCGS	Energy Northwest Columbia Generating Station
EPA	U.S. Environmental Protection Agency
ERC	Environmental Restoration Contract
ERDF	Environmental Restoration Disposal Facility
ETF	200 Area Effluent Treatment Facility
FH	Fluor Hanford
FFCA	<i>Federal Facilities Compliance Agreement</i>
FFTF	Fast Flux Test Facility
FSS	fuel supply shutdown
GTF	Grout Treatment Facility
HEPA	high-efficiency particulate air
HT	elemental tritium
HTO	tritiated water vapor
HVAC	heating, ventilation, and air conditioning
ISS	interim safe storage
IWTS	Integrated Water Treatment System
LAW	Low-Activity Waste
LLBG	Low-Level Burial Ground
LIGO	Laser Interferometer Gravitational Wave Observatory
MAP	mixed activation products
MASF	Maintenance and Storage Facility
MCO	Multi-Pack Canister Overpack

TERMS (cont)

MEI	maximally exposed individual
MFP	mixed fission products
mrem	millirem [i.e., 10^{-3} rem]
MW	mixed waste
NA	not applicable
ND	not detected
NDA	nondestructive analysis
NEPA	National Environmental Policy Act
NESHAP	National Emission Standards for Hazardous Air Pollutants
NF	not factored
NFM	Near-Facility Monitoring
NOC	notice of construction
PFP	Plutonium Finishing Plant
PHMC	Project Hanford Management Contract
PNNL	Pacific Northwest National Laboratory
PNSO	DOE-Pacific Northwest Site Office
PTRAEU	portable temporary radioactive air emission unit
PUREX	plutonium-uranium extraction
QA	quality assurance
RCC	River Corridor Closure Project
RCRA	<i>Resource Conservation and Recovery Act</i>
REDOX	reduction-oxidation
rem	roentgen equivalent man
RMCS	rotary mode core sampler
RPP	River Protection Project
RSB	Reactor Service Building
SNM	special nuclear materials
SST	single-shell tank
TRU	transuranic
UO ₃ Plant	Uranium-Trioxide Plant
WAC	Washington Administrative Code
WCH	Washington Closure Hanford, LLC
WESF	Waste Encapsulation and Storage Facility
WDOH	Washington State Department of Health
WIPP	Waste Isolation Pilot Plant
WRAP	Waste Receiving and Processing Facility
WSCF	Waste Sampling and Characterization Facility
WSU	Washington State University
WTP	Hanford Tank Waste Treatment and Immobilization Plant

1.0 INTRODUCTION

This report documents radionuclide air emissions from the U.S. Department of Energy (DOE) Hanford Site in 2005, and the resulting effective dose equivalent (EDE) to the maximally exposed individual (MEI) member of the public. The report complies with reporting requirements in the Code of Federal Regulations (CFR), Title 40, Protection of the Environment, Part 61, *National Emission Standards for Hazardous Air Pollutants*, Subpart H, "National Emission Standards for Emissions of Radionuclides Other than Radon from Department of Energy Facilities" and in the Washington Administrative Code (WAC) Chapter 246-247, "Radiation Protection — Air Emissions." The report also is in accord with the quality principles of 10 CFR 830, *Nuclear Safety Management*; DOE Order 414.1A, *Quality Assurance*; NQA-1, *Quality Assurance Requirements for Nuclear Facility Application*; and EPA QA/R-5, *Requirements for Quality Assurance Project Plans*.

1.1 HANFORD SITE DESCRIPTION

The Hanford Site (refer to Figure 1-1) is located in a rural region of southeastern Washington State, occupying an area of about 586 mi² (1,518 km²). It lies about 200 mi (320 km) northeast of Portland, Oregon; 170 mi (270 km) southeast of Seattle, Washington; and 124 mi (200 km) southwest of Spokane, Washington. More in-depth discussions on the characteristics and activities at the Hanford Site are available in the *Hanford Site National Environmental Policy Act (NEPA) Characterization* (PNNL-6415, Rev 15) and the *Hanford Site Environmental Report for Calendar Year 2005* (PNNL-15892).

1.1.1 Historical Background

In 1943, the federal government acquired the land that became the Hanford Site, where facilities were constructed and operated as part of the atomic weapons program, which began during World War II. For more than 40 years, most facilities at the Hanford Site were dedicated to operations that produced plutonium for national defense and to managing the radioactive and chemical wastes generated from those production processes. In more recent years, defense programs have essentially ceased while new programs have emerged. New programs include the major efforts to clean up contamination in the environment and facilities resulting from past operational practices and the research and development of new and improved waste disposal technologies. Presently, three DOE Offices manage the programs at the Hanford Site. They are the DOE-Richland Operations Office (DOE-RL), the DOE Office of River Protection (DOE-ORP), and the DOE-Pacific NW Site Office (PNSO).

1.1.2 Main Areas, Facilities, and Activities

Five main operational areas at the Hanford Site generated radionuclide air emissions in 2005: the 100, 200, 300, 400, and 600 Areas (refer to Figure 1-1). The 100 Areas have the two 100-K Spent Fuel Storage Basins, the Cold Vacuum Drying Facility (CVDF), and nine deactivated production reactors with support facilities, all located near the Columbia River. The 200 Areas are located on a plateau approximately 21.5 mi (34.7 km) northwest of the City of Richland and 7 mi (11.3 km) from the Columbia River. Facilities in the 200 East Area include the Single-Shell and Double-Shell Tank Farms, Canister Storage Building (CSB), Waste Encapsulation and Storage Facility (WESF), Plutonium Uranium-Extraction (PUREX) Facility, B Plant Complex, Waste Treatment and Immobilization Plant (WTP), 242-A Evaporator, 200 Area Effluent Treatment Facility (ETF), Low-Level Burial Grounds, and the U.S. Ecology Low-Level Burial Site. In the 200 West Area are the Plutonium Finishing Plant (PFP), Uranium-Trioxide (UO₃) Plant, Single-Shell and Double-Shell Tank Farms, T Plant Complex, U Plant,

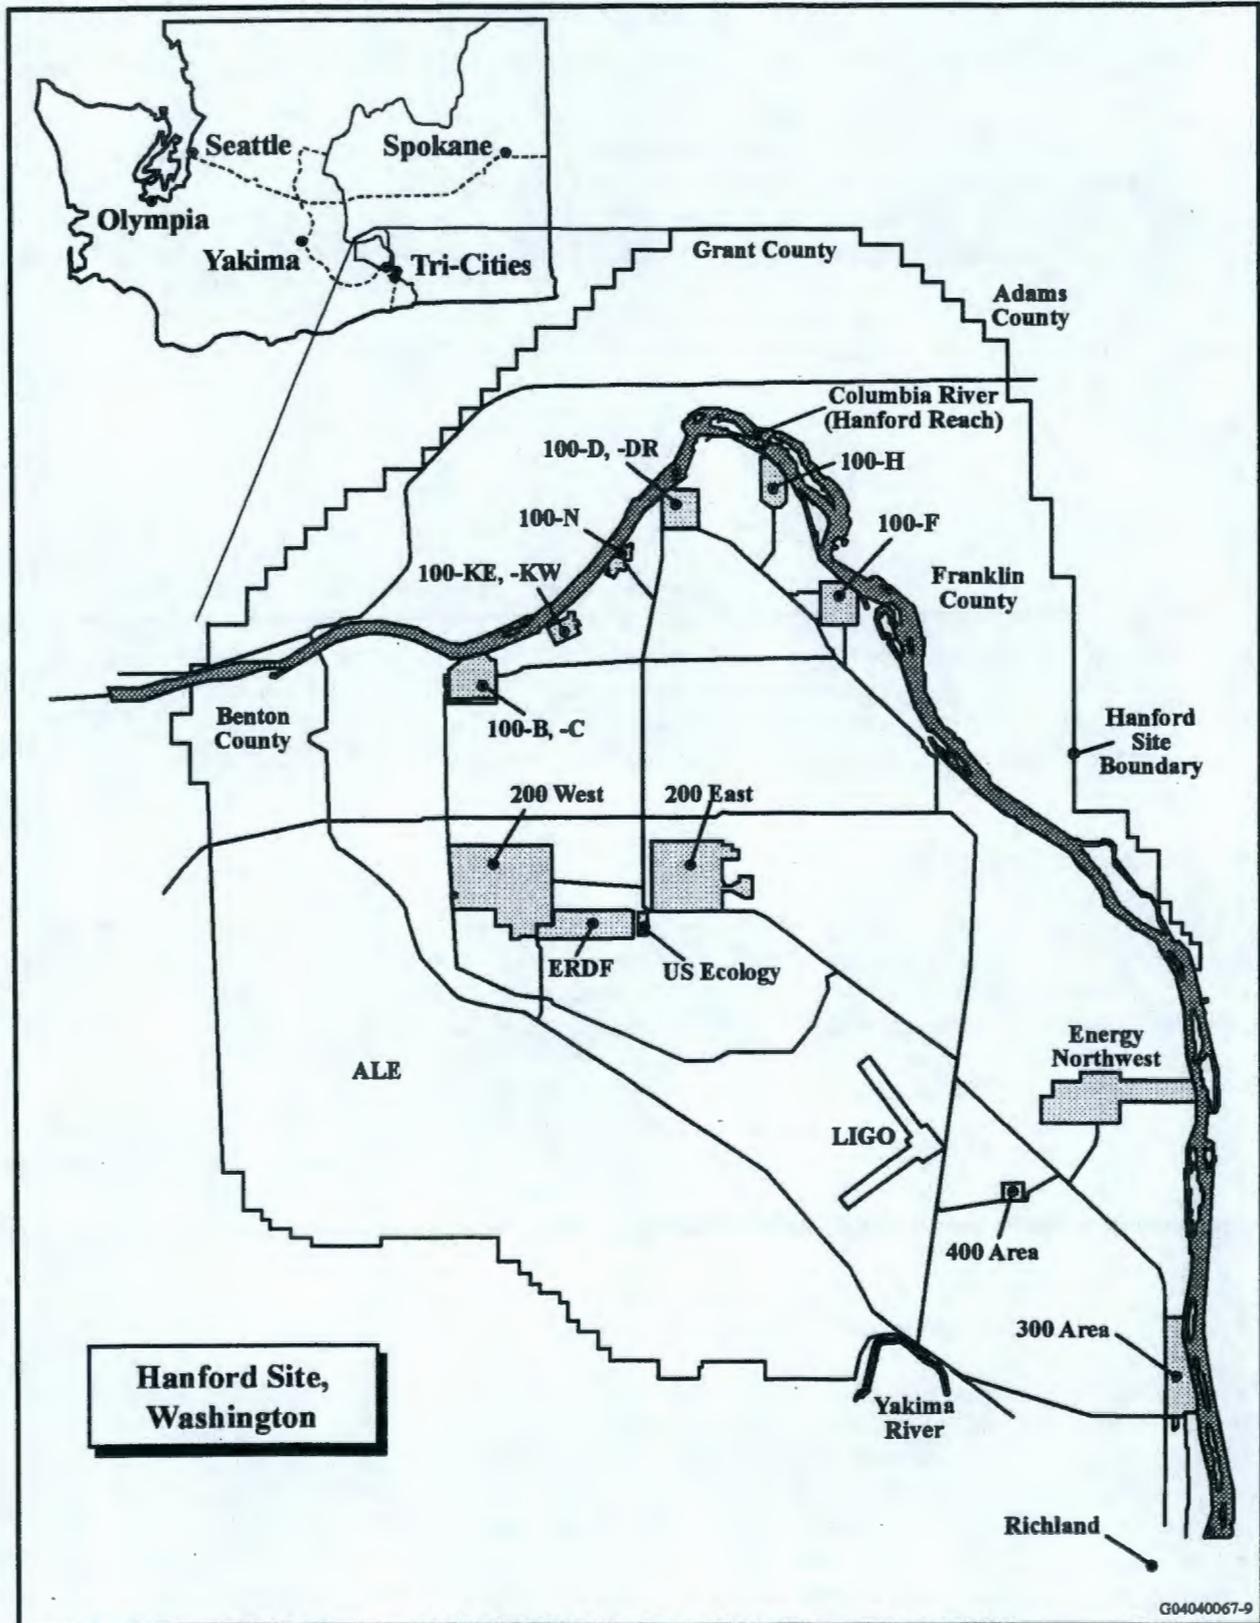


Figure 1-1. Hanford Site Map.

Reduction-Oxidation Plant (REDOX), 222-S Laboratory, Central Waste Complex (CWC), Waste Receiving and Processing (WRAP) Facility, and Low-Level Burial Grounds (LLBG). The 300 Area, just north of the City of Richland, has research and development laboratories and some of the remaining deactivated N Reactor Fuel Fabrication Facilities. The 400 Area has the retired Fast Flux Test Facility (FFTF), 8 mi (12.9 km) north of the City of Richland. The 600 Area has the Environmental Restoration Disposal Facility (ERDF) and the Waste Sampling and Characterization Facility (WSCF); both facilities are immediately east of the 200 West Area.

Notable events in calendar year 2005 relevant to radioactive airborne emissions monitoring and reporting are summarized as follows:

- Environmental restoration activities continued along the river in the 100 and 300 Areas of the Hanford Site. Contaminated soil and debris from inactive waste sites were excavated, transported, and disposed of at the 200 Area Environmental Restoration Disposal Facility (ERDF) as well as at other appropriate locations. Activities were conducted in the 100 Areas toward placing several of the reactors in interim safe storage (ISS) pending final disposition, which includes decontamination and decommissioning of those facilities as well as ancillary facilities. Several facilities in the 300 Area were also decontaminated, decommissioned, and demolished.
- Four single-shell tanks in the 200 Area Tank Farms had significant amounts of waste removed and transferred to the double-shell tank system.
- BNI continued construction of WTP. Four major facilities are being constructed: the Pretreatment Facility, the High-Level Waste Vitrification Facility, the Low-Activity Waste Vitrification Facility, and the Analytical Laboratory, construction of which began in 2004. No radioactive airborne emissions were released as a result of construction in 2005.
- CVDF packaged and dried the remainder of the spent nuclear fuel from the 100-K Spent Fuel Storage Basins. This fuel was then transported to CSB for storage.
- CSB received irradiated fuel in special containers from the 100-K Spent Fuel Storage Basins, by way of the Cold Vacuum Drying Facility. The containerized fuel is kept in special storage tubes within the CSB.
- The 200 Area Interim Storage Area continued operations to store spent fuel from non-defense production reactors in a dry-cask storage system.
- The 200 Area ETF continued treating radioactive-hazardous aqueous waste.
- The 242-A Evaporator continued its operational campaigns to evaporate excess liquid from the double-shell tank waste system.
- The 222-S Laboratory continued characterizing tank waste and supporting Hanford operational and remediation projects.
- WSCF continued analyzing large numbers of effluent and environmental samples.
- CERCLA deactivation work in 232-Z continued through 2005. In June 2005, PFP implemented two Above-Grade Removal Action plans, which had been approved in May 2005. This resulted in the transition of the 241-Z Building and its stack, 296-Z-3, and the 243-Z Building and its stack, 296-Z-15, to regulation under CERCLA.

- Decommissioning of FFTF continued. In December 1993, DOE ordered FFTF into a radiologically and industrially safe shutdown condition. In 2001, DOE ordered that FFTF be permanently shut down.

1.1.3 Prime Contractors

The DOE-RL prime contractors, along with their management responsibilities, are briefly described in this section.

- **Bechtel Hanford, Inc., and Washington Closure Hanford, LLC.** Until August 26, 2005, Bechtel Hanford, Inc. (BHI) managed the Environmental Restoration Contract (ERC) for DOE-RL. On that date, BHI transitioned a majority of its activities to the newly contracted River Corridor Closure Project (RCC), managed by Washington Closure Hanford, LLC (WCH). The scope of work for both contracts include surveillance and maintenance of inactive past-practice waste sites and of inactive facilities; remediation of past-practice waste sites; closure of Resource Conservation and Recovery Act land-based treatment, storage, and disposal units; and deactivation, decontamination, decommissioning, and demolition of facilities.
- **Fluor Hanford.** Fluor Hanford (FH) manages the Project Hanford Management Contract (PHMC) for DOE-RL. FH has responsibility for facilities such as 100-K Area Spent Fuel Storage Basins, Cold Vacuum Drying Facility, Canister Storage Building, PFP, FFTF, CWC, LLBG, WSCF, and T Plant Complex. FH monitors liquid effluents and air emissions, performs environmental surveillance near DOE facilities managed by BHI, CH2M HILL, FH, and WCH. FH has the responsibility for the surveillance and maintenance of inactive facilities on the Central Plateau, such as the PUREX Facility, B Plant Complex, REDOX, U Plant, and the 209-E Building. FH also has responsibility for groundwater project management, sitewide drilling management, contaminated groundwater remediation, and the environmental remediation, decontamination, and decommissioning of facilities on the Central Plateau in the 200 Areas. Additionally, FH provides Hanford Site support services, such as fire protection, central stores, distribution of electrical power, and generation of steam heat.

The DOE-ORP prime contractors at the Hanford Site are identified next, along with their management responsibilities and the facilities they oversee that have or have had radionuclide air emissions.

- **Bechtel National, Inc.** The mission of Bechtel National, Inc. (BNI) is to design, build, and commission the Hanford Tank Waste Treatment and Immobilization Plant to vitrify the tank waste at the Hanford Site. This project includes a pretreatment facility to separate the tank waste into high-level radioactive and low-activity radioactive streams. The High-Level Vitrification Facility and the Low-Level Vitrification Facility both will immobilize the waste in a glass form encased in canisters.
- **CH2M HILL Hanford Group, Inc.** CH2M HILL Hanford Group, Inc. (CH2M HILL) manages the River Protection Project (RPP) for DOE-ORP. CH2M HILL has responsibility for storing and retrieving for treatment approximately 54 million gallons of highly radioactive and hazardous waste stored in 177 underground tanks. The company's role includes characterizing the waste and delivering it to an under-construction vitrification facility, where the waste will be converted into a glass-like substance for permanent disposal. CH2M HILL will continue to be responsible for storage of the treated waste until permanent disposal facilities are available.

The DOE-PNSO prime contractor at the Hanford Site is identified next, along with its management responsibilities and the facilities it oversees that have or have had radionuclide air emissions.

- **Battelle Memorial Institute.** Battelle Memorial Institute operates the Pacific Northwest National Laboratory (PNNL) for PNSO. PNNL does research and development in the physical, chemical, life, and environmental sciences; produces advanced methods of nuclear waste management; and conducts environmental monitoring on and off the Hanford Site and liquid effluent and air emission monitoring at the DOE facilities it manages.

Some privately and publicly owned facilities capable of generating airborne radioactive emissions are located at or near the Hanford Site. These facilities include 1) a low-level waste burial site operated by U.S. Ecology on the 200 Area plateau, 2) the Energy Northwest Columbia Generating Station commercial nuclear reactor and office buildings, near the Columbia River, north of the 300 Area and east of the 400 Area, 3) the Severn Trent laboratory south of the 300 Area, 4) the Areva (formerly Framatone ANP, Inc.) fuel fabrication facility, adjacent to the Hanford Site southern boundary, 5) Pacific EcoSolutions (formerly Allied Technology Group), adjacent to the east side of the Areva facility, 6) Interstate Nuclear Services, located 1 mi (1.6 km) south of the southern boundary of the Hanford Site, and 7) Battelle's non-DOE research laboratories in north Richland. Emissions from these facilities are not included in this report because they are not regulated as part of the Hanford Site.

1.2 POINT SOURCE DESCRIPTIONS

This section includes descriptions of point sources. A point source is reported in the certified sections (i.e., Sections 1.0, 2.0, and 3.0) of this report if it met the following four criteria during 2005: 1) required continuous monitoring or periodic confirmatory measurements in accordance with 40 CFR 61, Subpart H, and with WAC 246-247, 2) was registered with WDOH, 3) emitted or had the potential to emit radionuclides, and 4) effluent sampling was the monitoring method used. Point sources not included in the certified sections of this report did not meet all four criteria.

Emissions from other radionuclide air emission sources are reported in Sections 4.0, 5.3, and 5.4. Emissions from those sources were estimated or verified using methods thus far accepted by the U.S. Environmental Protection Agency (EPA) and WDOH.

1.2.1 General Description and Reporting Criteria

Radionuclide air emissions from point sources generally are discharged from stacks and vents (from this point forward, *stack* implies vent as well, unless vent is used as the proper name or description of a point source). Stack sizes, shapes, and discharge paths vary because of facility requirements at the time of construction. Discharge heights range from nearly ground level to 200 ft (61 m), and flow rates range from less than 100 ft³/min (0.047 m³/s) to 290,000 ft³/min (137 m³/s). Stacks vary in design from horizontal to vertical, rectangular to cylindrical, actively to passively ventilated, and permanent to portable.

A point source is designated "major" when hypothetically in the absence of normal emission controls its potential maximum emissions can cause a dose greater than 0.1 mrem/yr EDE to the nearest member of the public not employed by DOE or its contractors associated with the Hanford Site and who lives near and/or has unrestricted access to a place of employment on the Hanford Site. A point source is "minor" when under the same hypothetical conditions its potential maximum emissions in the absence of emission controls cannot cause a dose greater than 0.1 mrem/yr EDE.

The following emission abatement methods were used singularly or in combination to remove radioactive constituents from most stack emissions during 2005: 1) high-efficiency particulate air (HEPA) filters,

2) sand filters, 3) deep-bed fiberglass filters, 4) fiberglass prefilters, 5) charcoal absorbers and 6) water scrubbers. Generally, from one to three stages of HEPA filtration were used as the final particulate-removal method before an air emission stream was exhausted to the atmosphere.

1.2.2 100 Areas Facilities

The 100 Areas contain nine inactive production reactors and their associated support facilities. Many of the reactors have been placed in ISS and many associated support facilities demolished. The only point sources of radionuclide air emissions are at facilities in the 100-K and 100-N Areas. Those point sources are briefly described below and their locations illustrated in Figure 1-2.

1.2.2.1 100-N Area

The 100-N Area contains the inactive N Reactor and ancillary facilities.

- **107-N Stack.** This minor CERCLA-regulated stack exhausted filtered air from activities conducted to decontaminate and decommission the inactive 107-N Basin Recirculation Facility. Particulate emissions were sampled.

1.2.2.2 100-K East and West Areas

These areas contain two retired reactors awaiting decommissioning, two water-filled storage basins storing irradiated nuclear fuel, a radiological analysis laboratory, and the Cold Vacuum Drying Facility.

- **105-KE.** Three minor vents exhausted unfiltered air from the spent fuel storage basin in the 105-KE Building. Particulate radionuclides were sampled from each of these minor (i.e., potential of less than or equal to 0.1 mrem/yr effective dose equivalent [EDE] potential to emit) air emission streams.
- **105-KW.** Three minor vents exhausted unfiltered air from the spent fuel storage basin in the 105-KW Building. Particulate radionuclides were sampled from each these minor air emission streams.
- **1706-KE.** This minor stack exhausted filtered air from the 1706-KE Laboratory. Particulate emissions were sampled.
- **296-K-142.** This major (i.e., greater than 0.1 mrem/yr EDE potential to emit) stack exhausted filtered air from CVDF. Particulate emissions were sampled.
- **100-KE Sludge and Purge Vents.** These two major vents provide passage for air from the 105-KE Basin Sludge and Water System to the environment. A sample filter placed directly in-line of each vent pipe serves as both the abatement medium and the sampling medium for emissions via this vent. The filter is routinely exchanged and analyzed for particulate radionuclides.
- **100-KW Air Sparging Vent.** Air from the work area of the 105-KW Integrated Water Treatment System (IWTS) passively moves through this major vent, equipped with a single HEPA filter. During backwashing of system filters, radionuclides may become airborne and captured on the HEPA filter, which is destructively analyzed either quarterly if the air sparger was operated or annually if not.

1.2.3 200 East Area Facilities

The 200 East Area contains facilities for chemical separations, reprocessing, and waste handling and disposal. Locations of radionuclide air emission discharge points in the 200 East Area are illustrated in Figure 1-3. The majority of radionuclides discharged from the 200 Areas are in particulate form. The PUREX Plant and Tank Farm evaporator facilities may still discharge a volatile radionuclide, ^{129}I .

1.2.3.1 Plutonium-Uranium Extraction Facility

The PUREX Facility was deactivated in June 1997.

- **291-A-1.** This major stack exhausted filtered air from the canyon (cells A through M) and vessel and condenser vents. Emissions were sampled for particulate radionuclides and volatile ^{129}I .
- **296-A-10.** This minor stack exhausted filtered air from Storage Tunnel No. 2. This stack has not operated since 1996. When it did operate, particulate emissions were sampled.

1.2.3.2 B Plant Complex

The B Plant Complex separated plutonium from spent nuclear fuel, but its operations were later reconfigured to remove ^{90}Sr and ^{137}Cs from high-level liquid waste. The main canyon building, 221-B, contains radioactive contamination from various production campaigns. The B Plant Complex, excluding WESF, was deactivated in 1998.

- **296-B-1.** This major stack, the replacement B Plant main stack, exhausted filtered air from the main canyon and process cells in the 221-B Building, from the process cell in the 212-B Building, and from the 224-B Building via the vessel vent. In 2004, EPA approved the downgrade of this stack from major to minor. By the end of the second quarter 2005, WDOH had concurred with EPA's decision, and thus, for the remainder of 2005, this stack was monitored as a minor point source. Particulate emissions were sampled.

1.2.3.3 Waste Encapsulation and Storage Facility

At WESF, ^{90}Sr and ^{137}Cs from waste separations material were converted to solid strontium fluoride and cesium chloride, respectively. Those cesium and strontium compounds were separately double-encapsulated and placed in water-filled storage basins at WESF. The current mission for WESF is to continue storing these radioactive capsules.

- **296-B-10.** This major stack exhausted filtered air from the 225-B Building. Particulate emissions were sampled.

1.2.3.4 244-AR and 244-CR Vaults

The 244-AR and 244-CR vaults are retention facilities used during transfers of high-level radioactive liquid waste from Tank Farms.

- **296-C-5.** This major stack did not operate, was declared out of service June 30, 2005, and will be closed in 2006. When operated, it exhausted filtered air from the 244-CR Vault Cell and vessel ventilation system.
- **296-P-32.** This major stack, a portable exhauster connected to the 244-AR Vault ventilation system, was inactive and did not operate in 2005; no plans exist to operate it again.

1.2.3.5 200 East Area Tank Farms

Radioactive waste stored in Tank Farms consists of sludge and saltcake in single-shell tanks (SSTs) and liquid in double-shell tanks (DSTs).

- **296-A-18.** This minor stack exhausted filtered air from the 241-AY-101 Tank annulus. Particulate emissions were sampled.
- **296-A-19.** This minor stack exhausted filtered air from the 241-AY-102 Tank annulus. Particulate emissions were sampled.
- **296-A-20.** This minor stack exhausted filtered air from the 241-AZ-101 and -102 Tank annuli. Particulate emissions were sampled.
- **296-A-26.** This minor stack exhausted filtered air from the waste unloading room and sump tank at the 204-AR Waste Unloading Station. Particulate emissions were sampled.
- **296-A-27.** This minor stack exhausted filtered air from the 241-AW tanks. Particulate emissions were sampled.
- **296-A-28.** This minor stack exhausted filtered air from the tank annuli in the 241-AW Tank Farm. Particulate emissions were sampled.
- **296-A-29.** This minor stack exhausted filtered air from the 241-AN tanks. Particulate emissions were sampled.
- **296-A-30.** This minor stack exhausted filtered air from the tank annuli in the 241-AN Tank Farm. Particulate emissions were sampled.
- **296-A-40.** This minor stack exhausted filtered air from the 241-AP tanks. Particulate emissions were sampled.
- **296-A-41.** This minor stack exhausted filtered air from the tank annuli in the 241-AP Tank Farm. Particulate emissions were sampled.
- **296-A-42.** This major stack exhausted filtered air from the tanks in the 241-AY and 241-AZ Tank Farms. Particulate and volatile radionuclide emissions were sampled.
- **296-A-43.** This minor stack exhausted filtered building ventilation air from the 702-AZ Building. Particulate emissions were sampled.
- **296-B-28.** This major stack did not operate and was declared out of service on June 30, 2005, under plans to deactivate and cap it in 2006. When it did operate, it exhausted filtered air from the 244-BX Saltwell Receiver Tank and its annulus.
- **296-C-6.** This major stack has been inactive since 2002.
- **296-P-33 and 296-P-34.** These major portable exhausters are inactive and did not operate in 2005; no plans exist to operate them again. When in operation, they exhaust filtered air from waste tanks when rotary-mode core samplers collect core samples.

- **296-P-45.** This major stack, a portable exhauster, was last used to exhaust filtered air from the 244-AR facility. It did not operate during 2005 nor was it connected to a facility. For 2005, it was located at a maintenance area.
- **296-P-47.** This major stack, a portable exhauster, exhausted filtered air from the 241-C-103 Tank during work to retrieve much of the remaining tank contents in support of activities leading to final tank closure. Particulate emissions were sampled.
- **296-P-48.** This major stack, a portable exhauster, exhausted filtered air from the 241-C-200 tanks during work to retrieve much of the remaining tank contents. Particulate emissions were sampled.

1.2.3.6 242-A Evaporator

The 242-A Evaporator operated in 2005 to remove liquid from Double-Shell Tank liquid mixed waste, resulting in a more concentrated waste stream, which was transferred back to the Tank Farms.

- **296-A-21.** This minor stack exhausted filtered air from the 242-A Building. Particulate emissions were sampled.
- **296-A-22.** This minor stack exhausted filtered air from the 242-A Evaporator vessel ventilation system. Particulate emissions were sampled.

1.2.3.7 200 Area Effluent Treatment Facility

ETF treats mixed aqueous waste streams prior to their disposal at the State-Approved Land Disposal Site, also designated as the 616-A Crib.

- **296-E-1.** This minor stack exhausted filtered air from the 2025-E Building and ETF processing vents. Particulate emissions were sampled.

1.2.3.8 Canister Storage Building

This facility stores irradiated fuel from the 100-K Spent Fuel Storage Basins. The fuel is contained in specially engineered canisters housed in storage tubes within the facility. Before the fuel was received at CSB, it passed through the Cold Vacuum Drying Facility (CVDF), where it was dried and packaged in the canisters for shipment.

- **296-H-212.** This major stack exhausted filtered air from the 212-H Building. Particulate emissions were sampled.

1.2.3.9 209-E Critical Mass Laboratory

This shut-down facility originally was used for testing critical mass configurations.

- **296-P-31.** This minor stack exhausted filtered building ventilation air from the 209-E Facility. Particulate emissions were sampled.

1.2.4 200 West Area Facilities

The 200 West Area contains facilities for laboratory analysis; chemical separations and processing; and waste handling and disposal. Locations of radionuclide air emission discharge points in the 200 West Area are illustrated in Figure 1-4.

1.2.4.1 Reduction-Oxidation Plant

REDOX also is known as the 202-S Building and as S Plant. REDOX operated as a fuel reprocessing facility until it was shut down in 1967.

- **291-S-1.** The REDOX main stack exhausted filtered air from the REDOX canyon. Particulate emissions were sampled from this minor stack.

1.2.4.2 T Plant Complex

The T Plant Complex consists of two main structures: the 221-T Building and the 2706-T Facility. The 221-T Building is one of the original fuel-processing facilities. The last fuel processed there was in 1956. The 221-T Building and the 2706-T Facility are now used for the treatment, storage, repackaging, sampling, and verification of waste containers. Liquid waste was treated and stored in tank systems and radioactively contaminated equipment decontaminated in both structures.

- **291-T-1.** This major stack exhausted filtered air from the 221-T canyon, 224-T process cells, and process ventilation system. Particulate emissions were sampled.
- **296-T-7.** This minor stack exhausted HEPA-filtered air from the 2706-T and 2706-TA Buildings when decontamination, treatment, storage, sampling, etc., activities were performed or other activities were underway that had the potential to increase airborne radionuclide contamination; otherwise, the stack does not operate. Particulate emissions were sampled.

1.2.4.3 U Plant

U Plant was constructed as a fuel reprocessing plant but never used for that purpose. Instead, it was used to recover uranium from bismuth-phosphate waste and high-level radioactive wastes from Tank Farms. U Plant is now a retired facility.

- **291-U-1.** This minor stack exhausted filtered air from the 221-U canyon ventilation system. Particulate emissions were sampled.

1.2.4.4 Plutonium Finishing Plant

PFP was constructed to produce plutonium metal from plutonium nitrate received from the PUREX Facility. PFP also recovered plutonium, in the form of plutonium nitrate, from plutonium scrap. The current mission for PFP is to maintain a safe and compliant facility, safely and securely store SNM, stabilize nuclear materials for long-term storage, and conduct clean-up activities.

- **291-Z-1.** This major stack exhausted filtered air from the 234-5Z, 236-Z, and 242-Z Buildings. Particulate emissions were sampled.
- **296-Z-3.** This major stack, regulated under CERCLA, exhausted filtered air from the 241-Z Vault sump and vessel ventilation system. Particulate emissions were sampled.

- **296-Z-5.** This minor stack exhausted filtered air from the 2736-ZB Building, used for shipping and receiving. Particulate emissions were sampled.
- **296-Z-6.** This minor stack exhausted filtered air from the 2736-Z Building and its plutonium storage vault ventilation system. Particulate emissions were sampled.
- **296-Z-7.** This major stack exhausted filtered air from the 2736-ZB Building, in which stabilization and packaging activities were conducted. Particulate emissions were sampled.
- **296-Z-14.** This major stack, regulated under CERCLA, exhausted filtered air from the 232-Z Incinerator Building. Particulate emissions were sampled.
- **296-Z-15.** This minor stack exhausted filtered air from the 243-Z Liquid Low-Level Waste Treatment Facility. Particulate emissions were sampled.

1.2.4.5 200 West Area Tank Farms

These tank farms hold high-level radioactive waste, consisting of sludge and saltcake in SSTs and liquid and slurry in DSTs.

- **296-P-22.** This minor stack exhausted filtered air from annuli in the 241-SY-101, -102, and -103 Tanks. Particulate emissions were sampled.
- **296-P-43.** This major stack, a portable exhauster, exhausted filtered air from the 241-S-112 tank. Particulate emissions were sampled.
- **296-P-44.** This major stack, a portable exhauster, exhausted filtered air from Tank 241-S-102. Particulate emissions were sampled.
- **296-S-15.** This minor stack did not operate in 2005, except for a brief period of aerosol testing of HEPA filters. When in use, it exhausts filtered air from the 241-SX-101 through -112 and 241-SX-114 tanks.
- **296-S-22.** This major stack did not operate and was declared out of service on June 30, 2005, under plans to deactivate and cap it in 2006. When it did operate, it exhausted filtered air from the 244-S Saltwell Receiver Tank and its annulus.
- **296-S-25 and alternate 296-P-23.** These minor stacks exhausted filtered air from the 241-SY-101, -102, and -103 Tanks. Operation of these two stacks alternates between the "A" train, which uses 296-S-25, and the "B" train, which uses 296-P-23. Exhaust-system operations for these tanks alternate between the two stacks (another minor stack, **296-P-28**, previously exhausted these tanks but has been permanently removed from service). Particulate emissions were sampled.
- **296-T-18.** This major stack operated in the first half of 2005 and was then declared out of service on June 30, 2005, under plans to deactivate and cap it in 2006. It exhausted filtered air from the 244-TX Saltwell Receiver Tank and its annulus. Particulate emissions were sampled.

1.2.4.6 200 West Area Evaporators

Two evaporators are in the 200 West Area: the 242-S Evaporator-Crystallizer Building and the 242-T Evaporator-Crystallizer Building. Both of these evaporators were shut down in the early 1980s.

The evaporators were designed to remove most of the water from radioactive liquid waste, with the resulting slurry then rerouted to the Tank Farms for interim storage.

- **296-S-18.** This minor stack exhausted filtered air from the 242-S Evaporator-Crystallizer Building. Particulate emissions were sampled.
- **296-T-17.** This minor stack did not operate in 2005. When in use, it exhausts filtered air from the 242-T Evaporator-Crystallizer Building and cold-cell ventilation system.

1.2.4.7 222-S Laboratory

The 222-S Laboratory provides chemical and radiochemical analytical support for Tank Farm waste characterization, research and development, environmental sample analysis, and Hanford operation and remediation projects.

- **296-S-16.** This minor stack exhausted filtered air from the 219-S Building waste tanks. Particulate emissions were sampled.
- **296-S-21.** This stack exhausted filtered air from 222-S Laboratory hoods, gloveboxes, hot-cells, and room ventilation system. In accordance with Washington State Department of Health Notice of Violation and Compliance Order AIR 05-1103, this stack has been treated as a major stack since October 2005. Before then, it was regarded as a minor stack. Particulate emissions were sampled.

1.2.4.8 Waste Verification and Sampling Facility

The contents of drums received from generators used to be verified at this facility, which was transferred to West Tank Farms in 1995.

- **296-W-3.** This minor stack did not operate in 2005, and is not expected to operate again (it has not operated since 1997). When in use, it exhausted filtered air from the 213-W Building.

1.2.4.9 Waste Receiving and Processing Facility

WRAP is used for examining, assaying, characterizing, and repackaging waste, principally TRU waste.

- **296-W-4.** This major stack exhausted filtered air from WRAP. Particulate emissions were sampled.

1.2.5 300 Area Facilities

The 300 Area consists primarily of laboratories, research facilities, a radioactive liquid waste handling facility, and several inactive facilities associated with prior Hanford Site missions. Locations of emission points in the 300 Area are illustrated in Figure 1-5.

1.2.5.1 305-B Hazardous Waste Storage Building

The 305-B Building is used to receive, store, and prepare shipments of dangerous waste and mixed waste generated by Hanford Site research and development programs.

- **EP-305B-01-S.** This minor stack exhausted emissions from a filtered process hood. Particulate emissions were sampled periodically.

1.2.5.2 306-W Materials Development Laboratory

This building contains shops and laboratory facilities for metal-working and ceramic studies.

- **EP-306W-03-V.** This minor exhaust vent was shut down and capped in July 2004.

1.2.5.3 340 Complex

Within the 340 Complex is the 340-A Building, which contains six aboveground tanks that had been used to temporarily store liquid mixed waste. Those tanks have been flushed and are currently empty. The 340-B Building was used for the railcar loadout of liquid mixed waste and has been shut down since 1998. The 340-B Building is currently used to temporarily store nonradioactive and radioactive solid waste. The 340 Vault houses two tanks, which have been emptied to the maximum extent practical. Operations within the vaults have permanently ceased.

- **340-NT-EX.** This minor stack exhausted filtered air from the 340 Building vault, the 340 Building vault tanks, the 340-A Building aboveground storage tanks, and the associated piping system. Particulate emissions were sampled. In 2003, EPA approved the downgrade of this stack from Category 1 (i.e., has a potential to emit radionuclides that cause a dose of greater than 0.1 mrem/yr; also known as a "major" stack) to Category 2 (i.e., has a potential to emit radionuclides that cause a dose of less than or equal to 0.1 mrem/yr; also known as a "minor" stack). By the end of the first quarter 2005, WDOH had concurred with EPA's decision to downgrade the stack; therefore, for the remainder of 2005, the stack was monitored as a minor point source.
- **340-B.** This minor stack did not operate in 2005. When last operated in 1998, it exhausted filtered air from the east portion of the 340-B Building.
- **340-DECON.** This minor stack exhausted filtered air from the 340 Building Decon Room. Particulate emissions were sampled.

1.2.5.4 318 Radiological Calibrations Laboratory

The building contains areas for calibrating radiation survey instruments and processing personnel dosimeters.

- **EP-318-01-S.** This minor stack exhausted emissions from a single fume hood. Particulate emissions were sampled.

1.2.5.5 320 Analytical and Nuclear Research Laboratory

The building contains environmental radiochemistry laboratories.

- **EP-320-01-S.** This minor stack exhausted filtered building ventilation air. Particulate emissions were sampled.
- **EP-320-02-S.** This minor stack exhausted emissions from a filtered chemistry hood. Particulate emissions were sampled.
- **EP-320-03-S.** This minor stack, which had exhausted emissions from a filtered chemistry hood, ceased operations and was deregistered in 2004.

- **EP-320-04-S.** This minor stack exhausted emissions from filtered chemistry hoods. Particulate emissions were sampled.

1.2.5.6 323 Mechanical Properties Laboratory

The building contains areas for investigating structural properties of irradiated materials.

- **EP-323-01-S.** This minor stack exhausted filtered building ventilation air. Particulate emissions were sampled.

1.2.5.7 324 Waste Technology Engineering Laboratory

The building contains laboratories that were used for chemical and process development activities, and is now undergoing clean-out and deactivation.

- **EP-324-01-S.** This major stack exhausted filtered building air. Particulate emissions were sampled.

1.2.5.8 325 Radiochemical Processing Laboratory

The building contains radiochemistry laboratories and hot cells used for research process development, mixed waste treatment activities, and radioanalytical services.

- **EP-325-01-S.** This major stack exhausted filtered building air. Emissions were sampled using a record particulate sampler and a tritium sampler.

1.2.5.9 326 Materials Sciences Laboratory

The building contains laboratories and equipment for studies of metallurgical, chemical, and physical behavior of reactor components, fuel materials, mixed fission products, mixed activation products, and ceramic composite materials.

- **EP-326-01-S.** This minor stack exhausted both filtered and unfiltered building air. Particulate emissions were sampled.

1.2.5.10 327 Post-Irradiation Testing Laboratory

The building, which contains hot-cells that had been used for examining and testing irradiated materials, was undergoing clean-out and deactivation.

- **EP-327-01-S.** This major stack exhausted filtered building air. Emissions were sampled using a record particulate sampler.
- **EP-327-02-V.** This minor roof vent exhausted filtered air from the waste compactor and decontamination cell. Particulate emissions were sampled. The exhaust fan was permanently shut down on December 29, 2005, in preparation for final closure of the emission unit.

1.2.5.11 329 Chemical Sciences Laboratory

The building contains chemistry laboratories for radioanalytical studies, environmental radionuclide studies, and radiation detection instrumentation development.

- **EP-329-01-S.** This minor stack exhausted filtered building ventilation air. Particulate emissions were sampled.

1.2.5.12 331 Life Sciences Laboratory

The building contains areas for biological and ecological research studies.

- **EP-331-01-V.** This major vent exhausted filtered building ventilation air. Particulate emissions were sampled.

1.2.5.13 3730 Gamma Irradiation Facility

The building contains a hot-cell for metallurgical studies of specimens of irradiated metals.

- **EP-3730-01-S.** This minor stack exhausted filtered building ventilation air. Particulate emissions were sampled.

1.2.5.14 Radiological Counting Facility

- **RCF-2-EX.** This minor stack exhausted filtered air via a hood in the radiological counting facility housed within the MO-423 trailer. Particulate emissions were sampled.

1.2.6 400 Area Facilities

The 400 Area consists of FFTF, the Maintenance and Storage Facility (MASF), and the Fuels Materials Examination Facility. Locations of emission points in the 400 Area are illustrated in Figure 1-7.

1.2.6.1 Fast Flux Test Facility

Decommissioning of FFTF continued through 2005. Located in the 400 Area, it is formally a 400-megawatt thermal, sodium-cooled, low-pressure, high-temperature reactor plant, which had been constructed for irradiation testing of breeder reactor fuels and materials.

- **FFTF-RE-SB.** This minor stack, located in the Lower Reactor Service Building (RSB), exhausted unfiltered air from the lower level of the RSB. Particulate emissions were sampled.
- **FFTF-CB-EX.** This minor stack, also referred to as the Combined Exhaust, exhausted unfiltered air from the reactor containment and gases from the argon processing system. Standby particulate filters are manually dampered into the system if airborne radioactive particulate concentrations exceed administrative limits, which did not occur in 2005. Emissions were sampled using record sampler to collect particulate radionuclides and tritium in the form of tritiated water vapor, also called HTO.
- **FFTF-HT-TR.** This minor stack, associated with the Heat Transport System South, exhausted ordinarily unfiltered air from portions of FFTF that are exterior to the containment. Standby particulate filters are manually dampered into the system if airborne radioactive particulate concentrations exceed administrative limits. Particulate emissions were sampled.

1.2.6.2 Maintenance and Storage Facility

MASF, or the 437 Building, is a multipurpose service center supporting the specialized maintenance and storage requirements of FFTF. MASF provides the capability for decontamination, repair, and storage of non-fueled components and hardware for FFTF.

- **437-MN&ST.** This minor stack exhausted filtered air from MASF. Particulate emissions were sampled.
- **437-1-61.** This minor stack exhausted filtered air from MASF. Particulate emissions were sampled.

1.2.7 600 Area Facilities

In the 600 Area, WSCF emits or has the potential to emit radionuclides. For dose modeling purposes, WSCF was regarded as in the 200 West Area because of its close proximity to the main entrance to that Area. Hence, WSCF is shown in Figure 1-4.

1.2.7.1 Waste Sampling and Characterization Facility

WSCF provides low-level radiological and chemical analyses on various types of samples and sample media. The majority of the analyzed samples are used to determine compliance with the requirements of environmental regulations and DOE Orders.

- **696-W-1.** This minor stack exhausted filtered air from the analytical laboratory, on the main floor of the 6266 Building. Particulate emissions were sampled.
- **696-W-2.** This minor stack exhausted filtered air from the Nuclear Spectroscopy Laboratory in the 6266 Building. Particulate emissions were sampled.

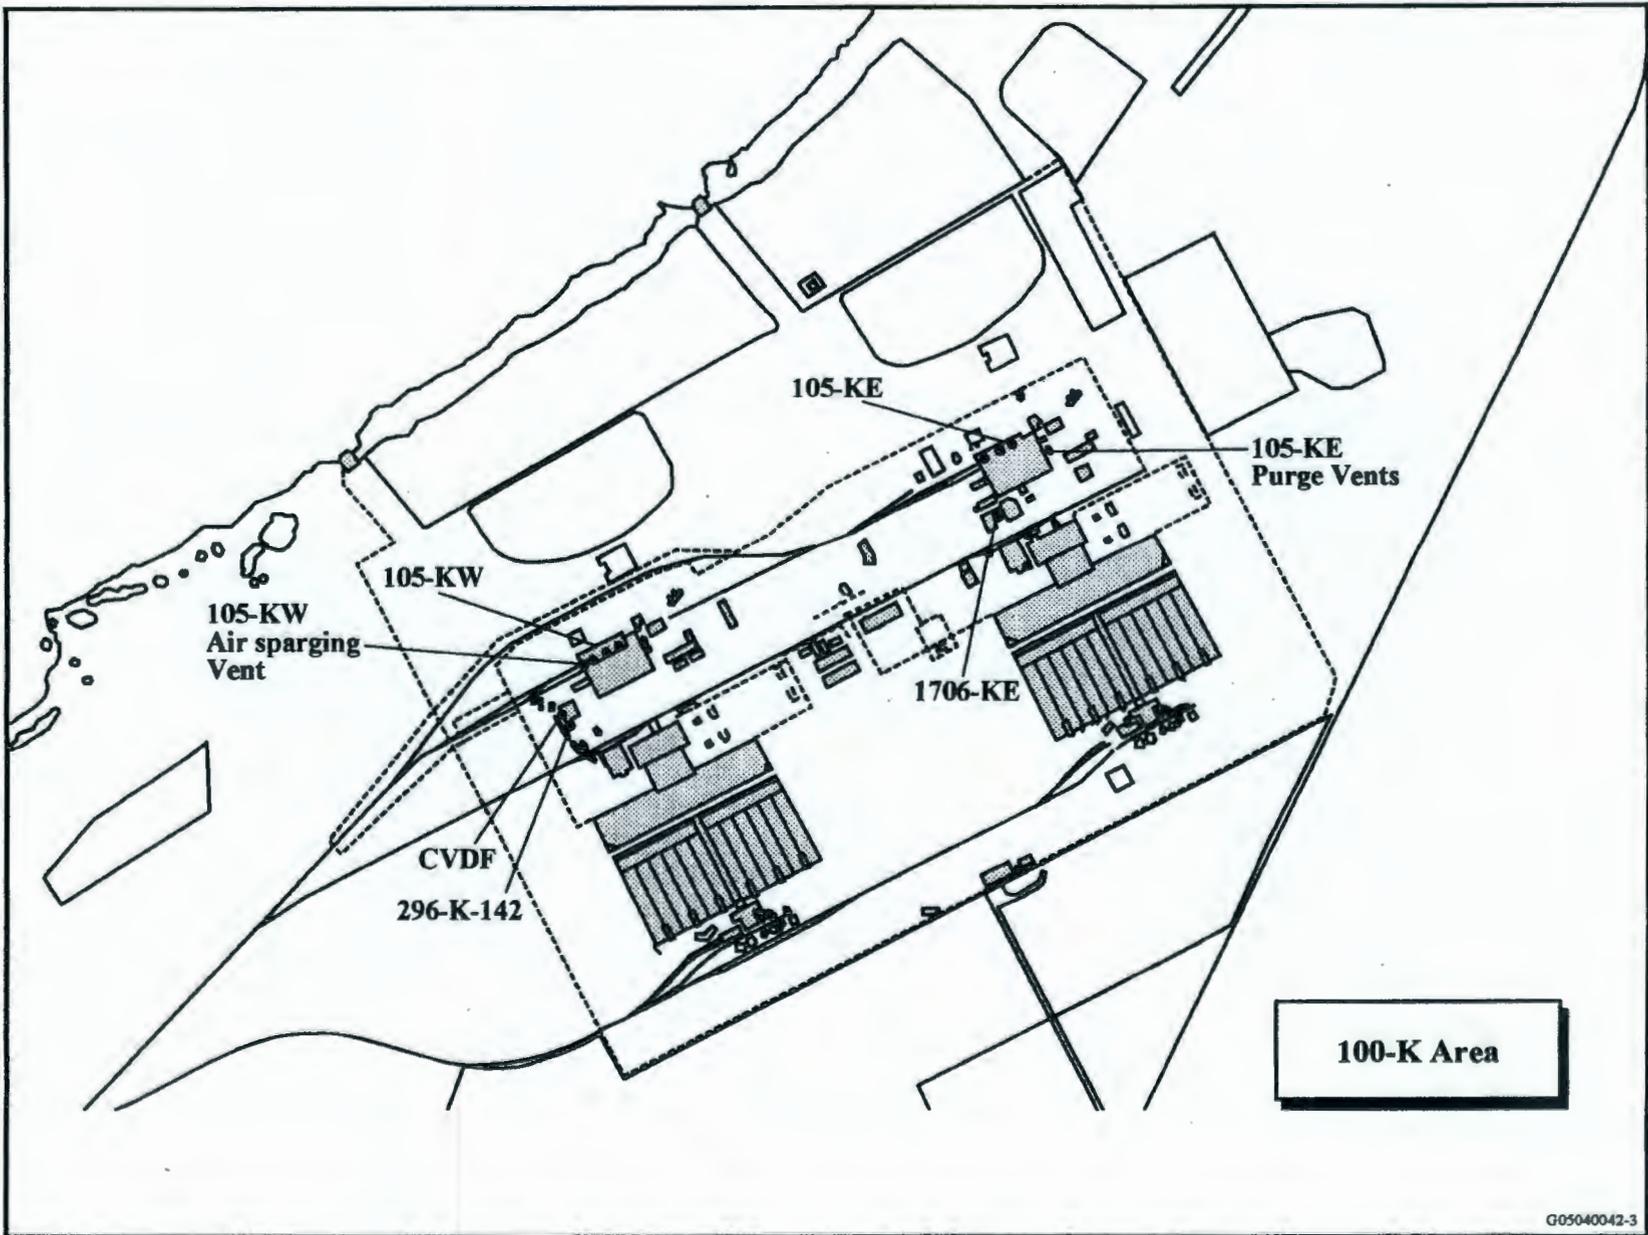


Figure 1-2. 100-K Area Emission Point Sources.

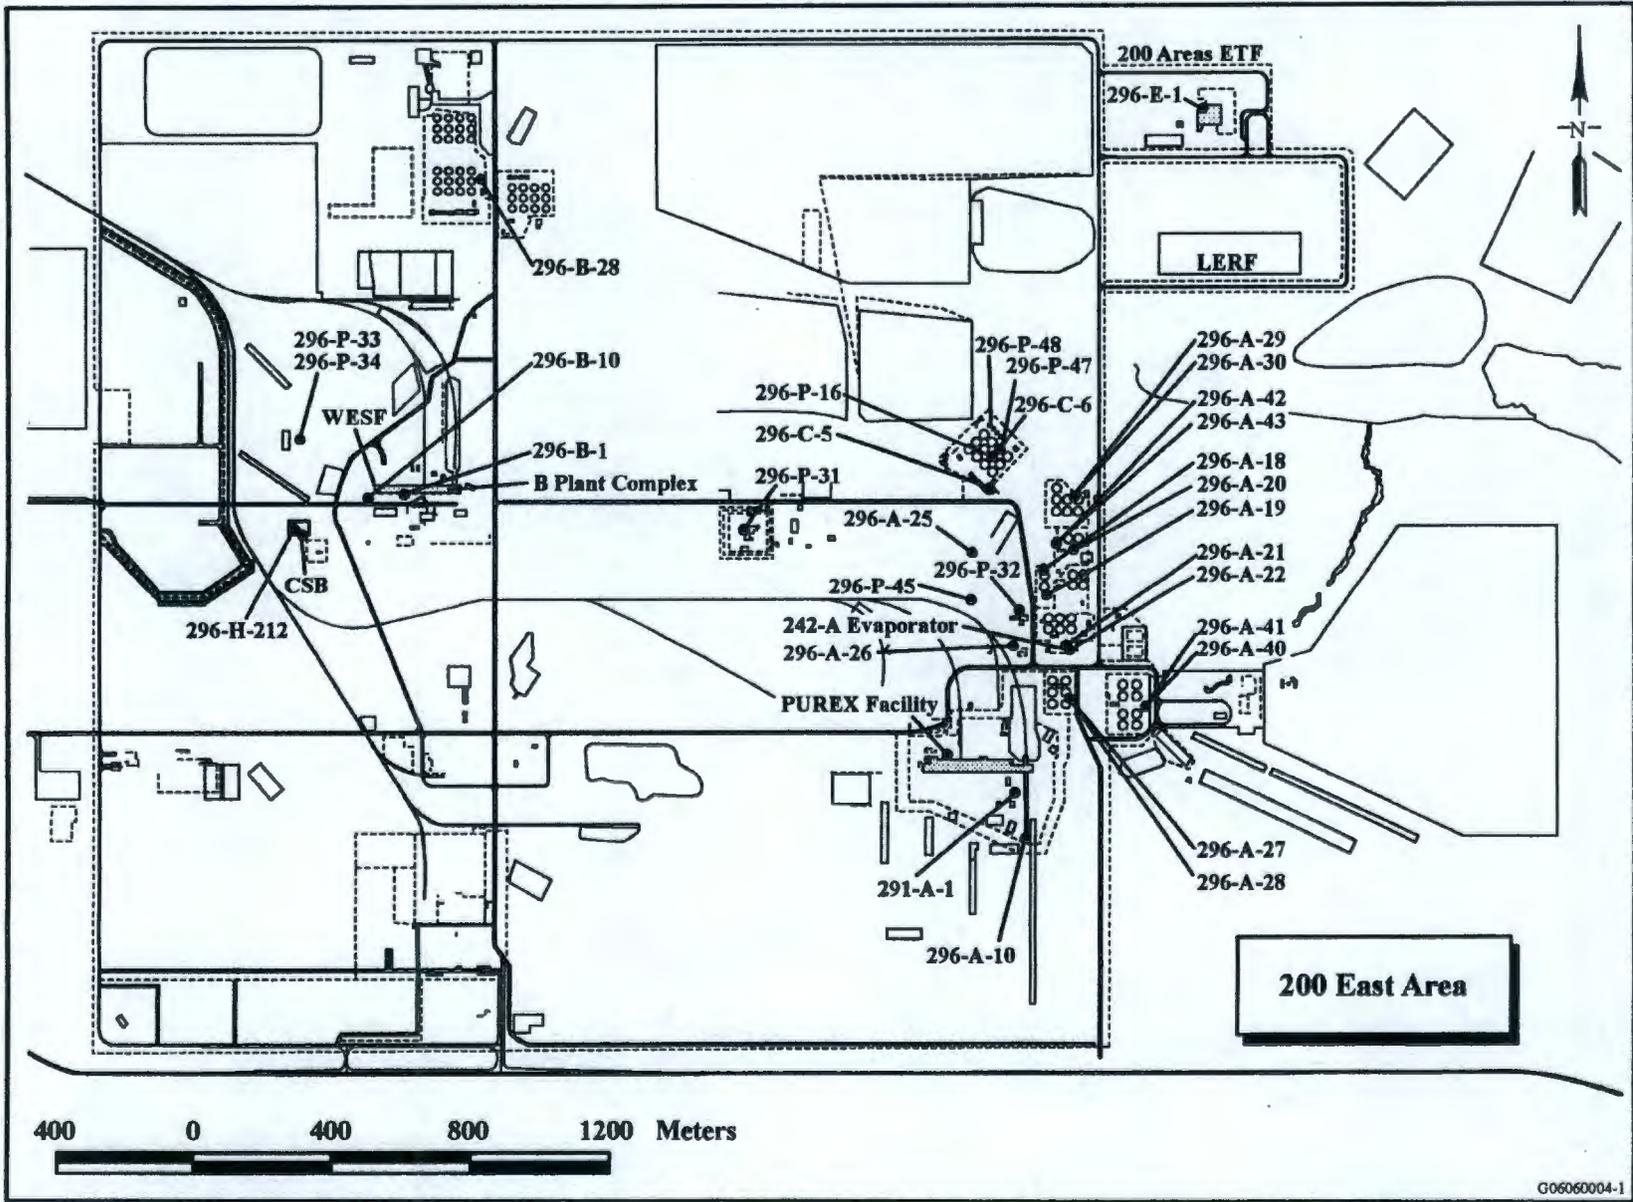


Figure 1-3. 200 East Area Emission Point Sources.

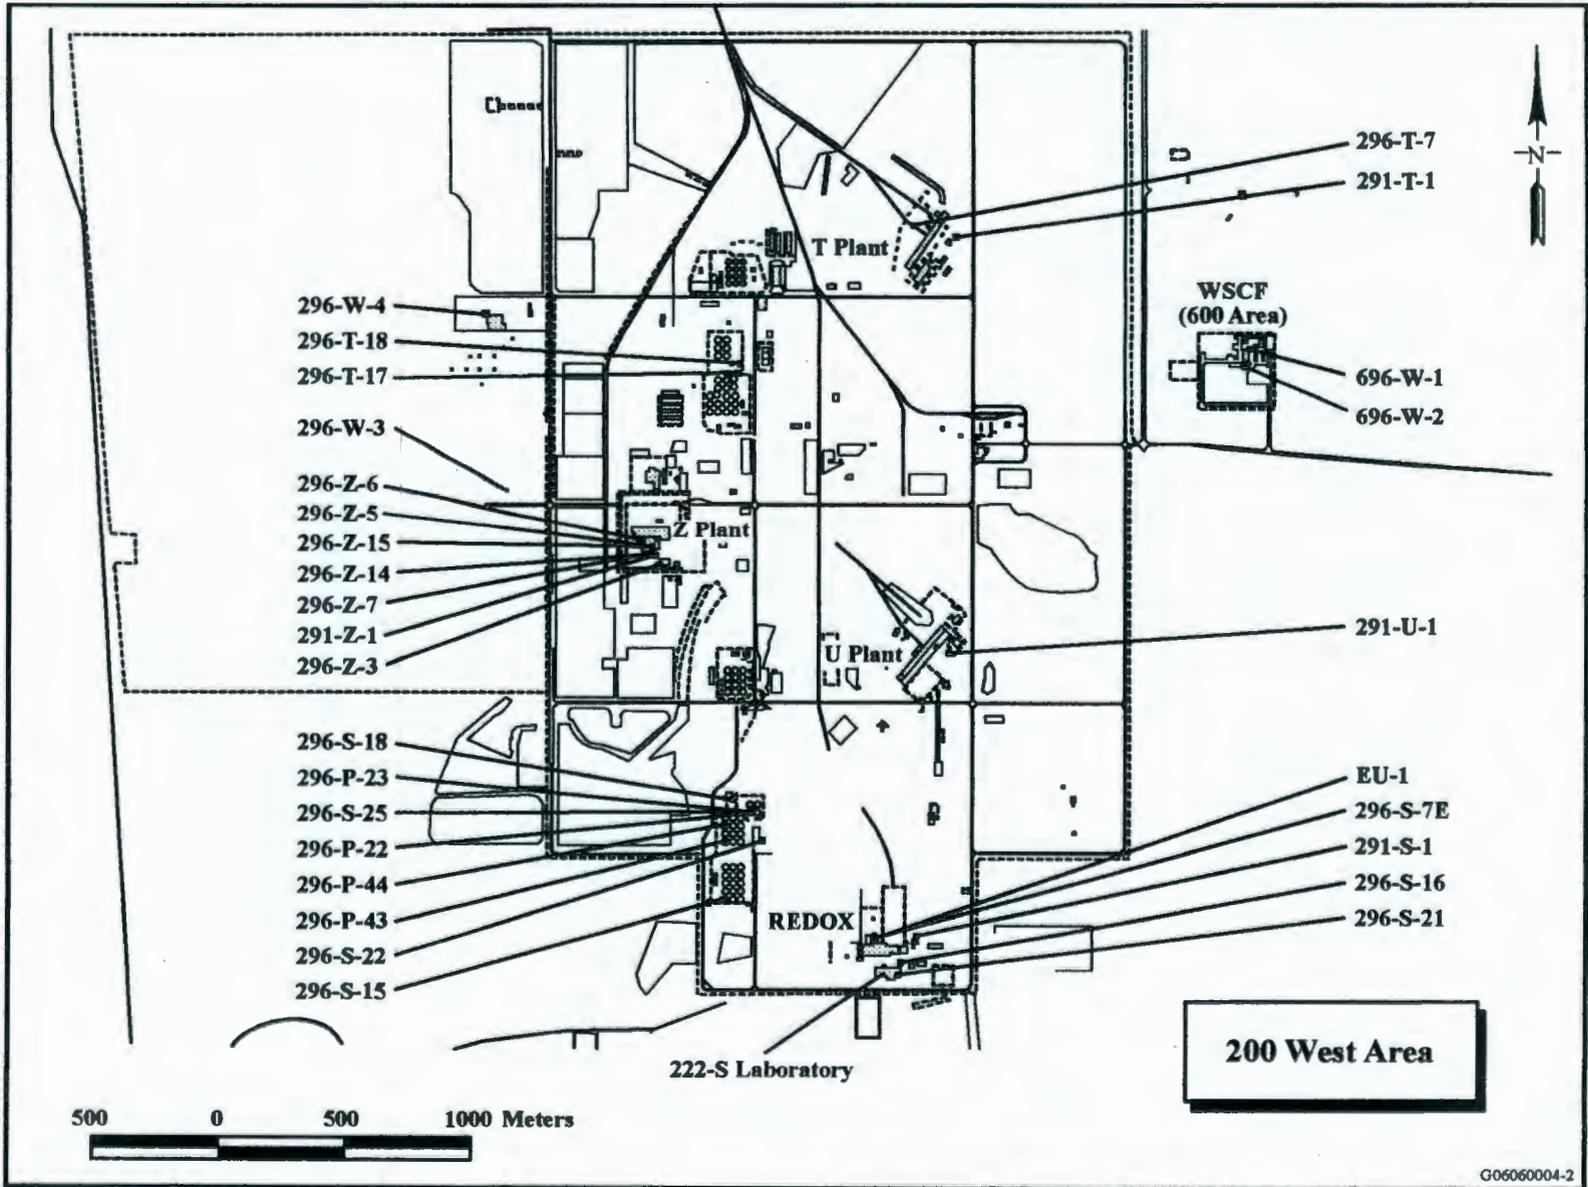
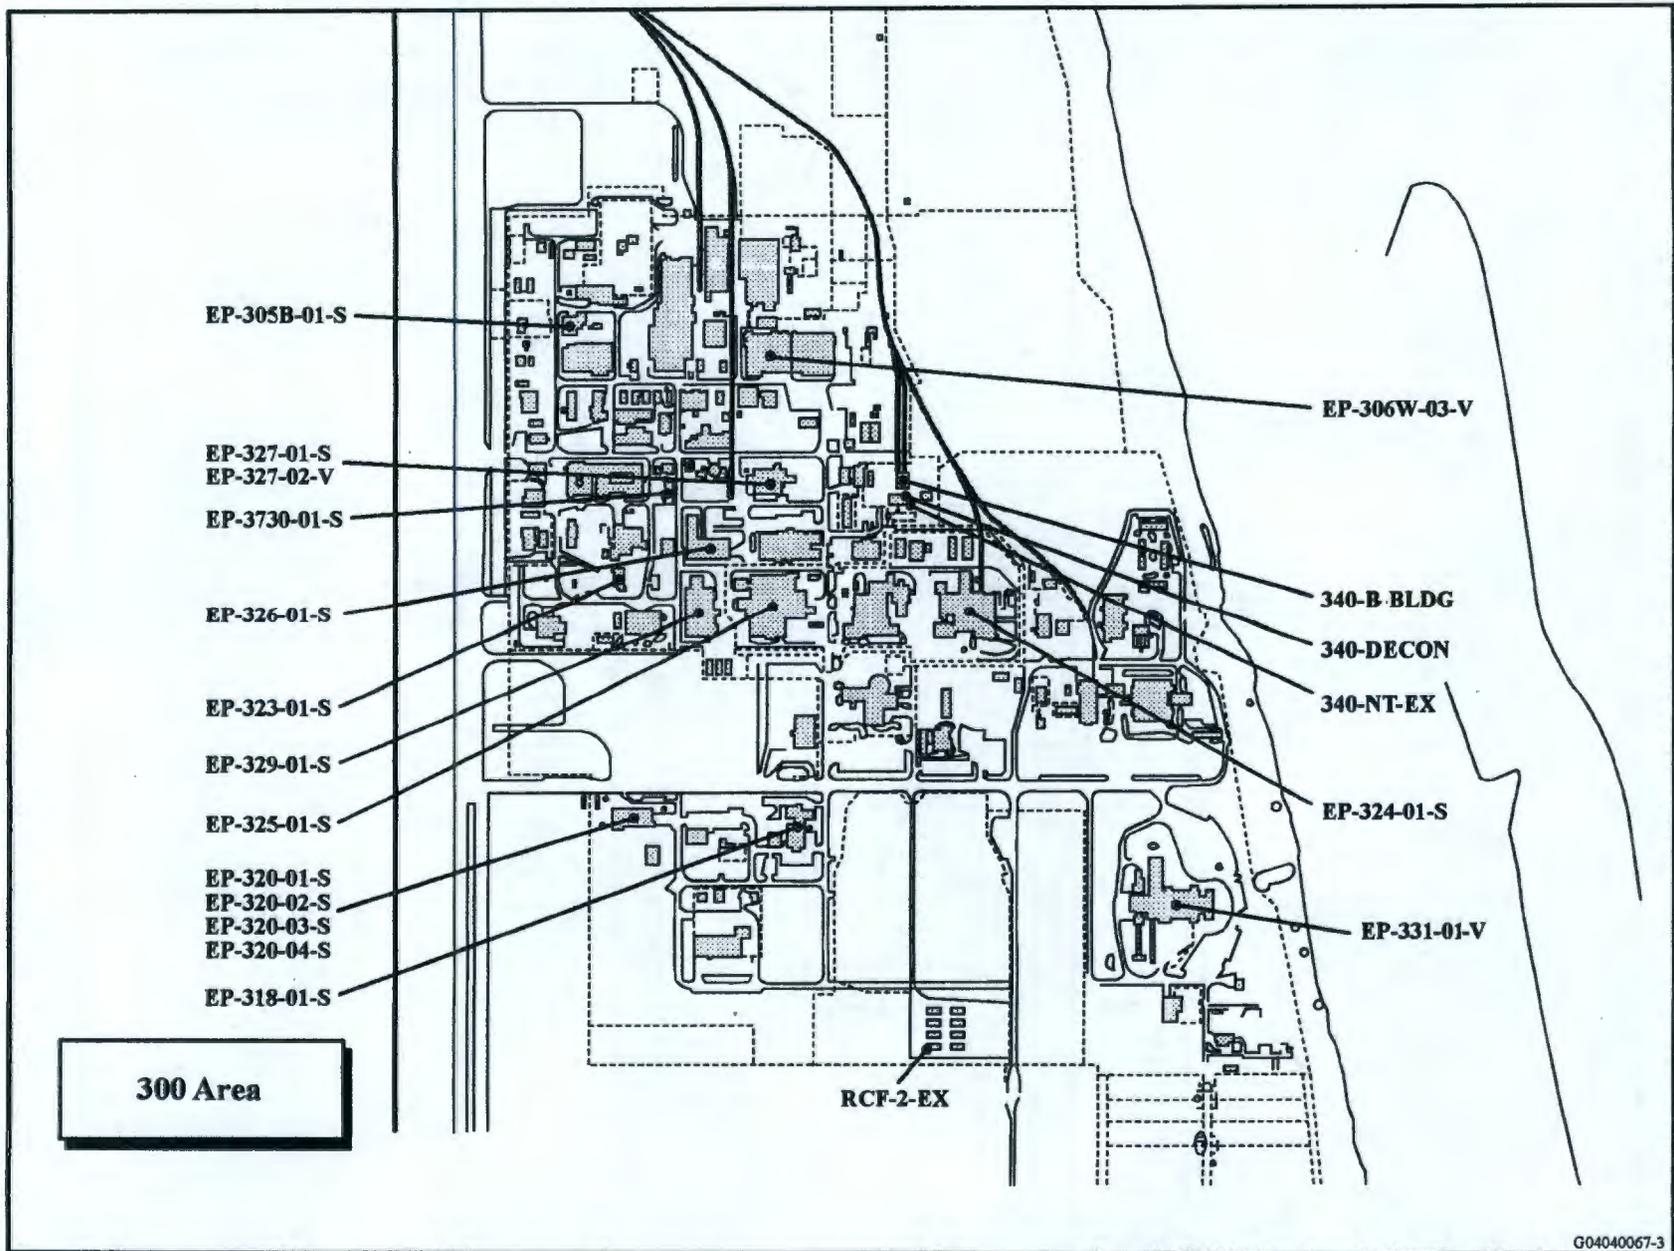


Figure 1-4. 200 West Area Emission Point Sources.

Figure 1-5. 300 Area Emission Point Sources.



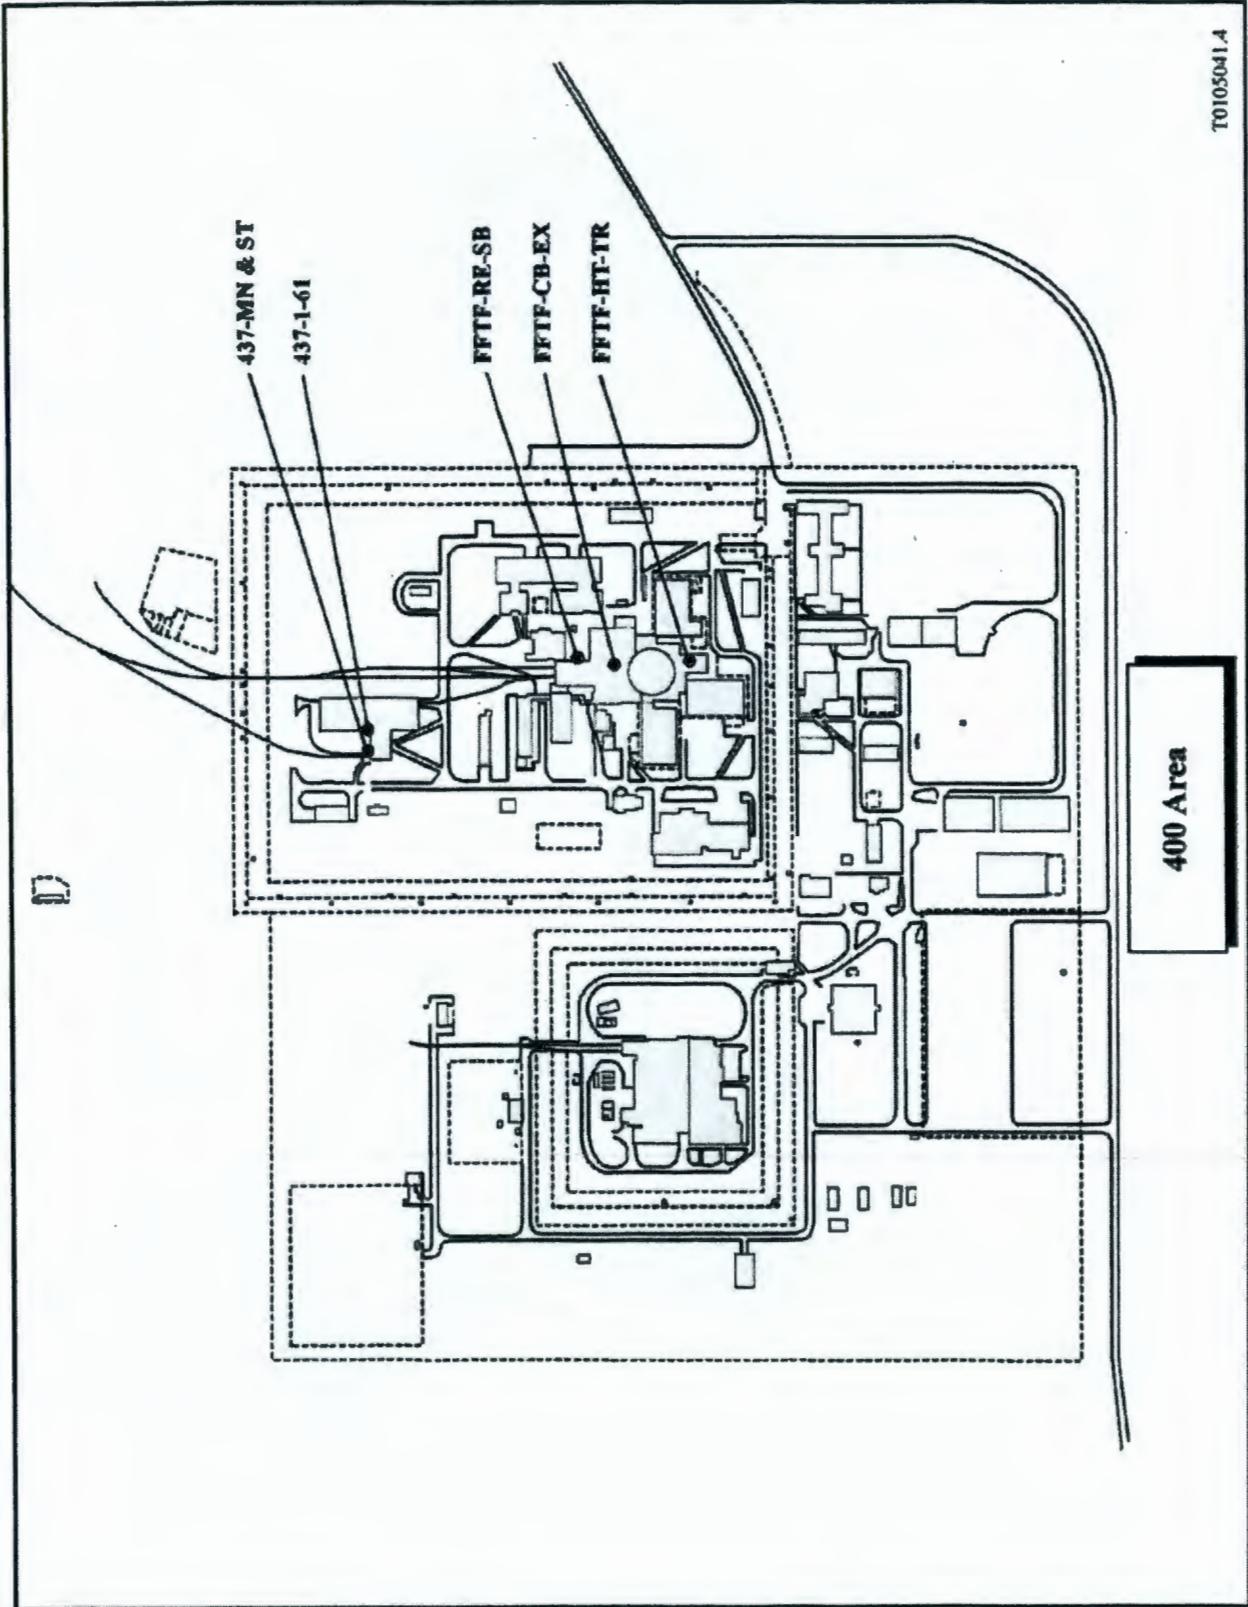


Figure 1-6. 400 Area Emission Point Sources.

This page intentionally left blank.

2.0 RADIONUCLIDE AIR EMISSION DATA ON POINT SOURCES

This section presents information on point sources of radionuclide emissions at the Hanford Site. Point sources are actively ventilated stacks or vents, which almost always use electrically powered exhausters. The criteria for reporting point source emissions are in Section 1.2, which also describes the basis for including an emission source in the certified sections (i.e., Sections 1.0, 2.0, and 3.0) of this report. Data on radionuclides emitted from point sources in 2005 are shown in Tables 2-1 and 2-2.

Tables 2-1 and 2-2 display emission data on, respectively, 24 major and 55 minor point sources considered active during any portion of 2005 (other point sources are listed, but they did not operate in 2005 and have been permanently shut down; listing them in this report is for historical transition purposes [they won't appear in next year's report]). The data include total releases in 2005 of radionuclides or types of radioactivity from each point source and the consequent doses from those releases.

Tables 2-3 and 2-4 present information on stack heights and emission control devices (operational HEPA-filter efficiencies are $\geq 99.95\%$ and sand filters, $\geq 95\%$).

Each emission point is assigned to the major operational area in which it is located or to which it is nearest (i.e., 100, 200 East, 200 West, 300, or 400 Areas). For each of the operational areas, a nearest location (e.g., dwelling, business [which can be on an unrestricted area of the Hanford Site], school, or office) is determined for a real or hypothetical public receptor not employed by DOE or its contractors and who has the potential of receiving the maximum exposure to emissions from that area. A common distance to that nearest public receptor is applied to all the emission points within an operational area. Thus, each of the five operational areas has assigned to it a respective location of a nearest public receptor. Radioactive doses calculated for these receptors are used to determine the regulatory category of each emission point source (i.e., whether it is major or minor) as well as requisite monitoring requirements. Information on these nearest receptors is in Table 2-5, including distances to the nearest farms that produce milk, meat, and vegetables.

In contrast to the five nearest public receptors is the Hanford Site MEI, a member of the public who hypothetically receives the highest calculated radiological dose attributable to Hanford Site emissions in on calendar year. Selection of the annual MEI, who cannot be an employee of DOE or its contractors, is contingent on the MEI's place of residence or employment (note: the business may be at an unrestricted location on the Hanford Site). Emission data used in the calculations represent those from all point sources as well as diffuse and fugitive sources, and not emissions from only a single operational area. For 2005, the MEI was a resident on a farm near Sagemoor Road, Franklin County, directly across the Columbia River from the Hanford Site 300 Area. For 2004, the MEI location was Ringold, also the site of the MEI from 1990 through 1992. From 1993 through 1999, the MEI was at the Sagemoor Road location. In 2000 and 2001, the location of the MEI changed, to two different locations within the 300 Area where non-DOE-related employment existed. Such employment ended in early 2002.

The dose to the MEI was calculated using the EPA-approved dose modeling program, Clean Air Act Assessment Package 1988-Personal Computer (CAP88-PC; EPA 1992). This dose value is used in determining the status of Hanford Site compliance with the dose standard in 40 CFR 61, Subpart H, of 10 mrem/yr EDE to any member of the public.

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEI, ^f mrem
100 Area Major Point Sources						
KE Purge Vent (105-KE Basin; FH; Y267 [under CERCLA ^g])	this emission point had no measurable flow; see Table 5-4 for filter analysis results					
KE Purge Vent (105-KE Basin; FH; Y268 [under CERCLA ^g])	this emission point had no measurable flow; see Table 5-4 for filter analysis results					
296-K-142 (CVDF; FH; Y201)	16,183 (7.64)	8.5 E+09 (2.4 E+08)	⁹⁰ Sr	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	6.6 E-18	2.8 E-09	2.8 E-09
			²⁴¹ Pu	7.5 E-16	3.2 E-07	5.1 E-09
			²⁴¹ Am	≤0	0	0
			gross α	5.4 E-17	2.3 E-08	NF
			gross β	1.0 E-15	4.3 E-07	NF
296-K-142 total dose: 7.9 E-09						
200 East Area Major Point Sources						
291-A-1 (PUREX Plant; FH; A006)	33,560 (15.84)	1.7 E+10 (4.9 E+08)	⁹⁰ Sr	1.9 E-15	1.9 E-06	3.8 E-08
			¹²⁹ I	2.2 E-12	1.3 E-03	2.3 E-04
			¹³⁷ Cs	2.3 E-14	2.0 E-05	8.6 E-07
			²³⁸ Pu	5.4 E-17	5.4 E-08	6.5 E-08
			^{239/240} Pu	1.5 E-15	1.5 E-06	2.0 E-06
			²⁴¹ Am	3.6 E-15	3.7 E-06	7.0 E-06
			gross α	4.4 E-15	4.4 E-06	NF
			gross β	2.4 E-14	2.4 E-05	NF
291-A-1 total dose: 2.4 E-04						
296-A-42 (RPP; CH2M HILL; E147)	842 (0.40)	4.4 E+08 (1.3 E+07)	⁹⁰ Sr	≤0	0	0
			¹²⁹ I	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	3.9 E-17	6.7 E-10	NF
			gross β	4.2 E-16	7.2 E-09	NF
296-A-42 total dose: 0						

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEI, ^f mrem
296-B-1 (B Plant; FH; B001)	16,557 (7.81)	8.6 E+09 (2.4 E+08)	⁹⁰ Sr	1.1 E-16	3.4 E-08	6.8 E-10
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	3.7 E-17	1.1 E-08	NF
			gross β	2.9 E-16	8.7 E-08	NF
296-B-1 total dose: 6.8 E-10						
296-B-10 (WESF; FH; B748)	24,390 (11.51)	1.3 E+10 (3.6 E+08)	⁹⁰ Sr	6.1 E-14	2.9 E-05	5.8 E-07
			¹³⁷ Cs	3.0 E-14	1.4 E-05	6.0 E-07
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	4.6 E-16	2.1 E-07	NF
			gross β	2.2 E-13	1.0 E-04	NF
296-B-10 total dose: 1.2 E-06						
296-B-28 (TF; CH2M HILL; E886)	did not operate; declared out of service June 30, 2005					
296-C-5 (TF; CH2M HILL; E069)	did not operate; declared out of service June 30, 2005					
296-C-6 (TF; CH2M HILL; E083)	did not operate; permanently closed in 2003					
296-H-212 (CSB; FH; C601)	8,419 (3.97)	4.4 E+09 (1.3 E+08)	⁹⁰ Sr	2.0 E-16	3.1 E-08	6.2 E-10
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	1.6 E-17	2.4 E-09	3.1 E-09
			²⁴¹ Am	≤0	0	0
			gross α	1.0 E-16	1.5 E-08	NF
			gross β	5.6 E-16	8.5 E-08	NF
296-H-212 total dose: 3.7 E-09						
296-P-32 (TF; CH2M HILL; E401)	did not operate; permanently closed					
296-P-33 (TF; CH2M HILL; E307)	did not operate; permanently closed					
296-P-34 (TF; CH2M HILL; E308)	did not operate; permanently closed					
296-P-45 (TF; CH2M HILL; E047)	did not operate (this portable exhaustor was not located at a facility in 2005)					

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEL, ^f mrem
296-P-47 (TF; CH2M HILL; E096)	708 (0.33)	1.0 E+07 (3.0 E+05)	⁹⁰ Sr	1.2 E-14	4.8 E-09	9.6 E-11
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	≤0	0	NA
			gross β	5.1 E-14	2.1 E-08	NF
			296-P-47 total dose: 9.6 E-11			
296-P-48 (TF; CH2M HILL; E098)	338 (0.16)	4.5 E+07 (1.3 E+06)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	≤0	0	NA
			gross β	1.2 E-15	2.0 E-09	NF
			296-P-48 total dose: 0			
200 West Area Major Point Sources						
291-T-1 (T Plant; FH; W882)	40,000 (18.88)	2.1 E+10 (6.0 E+08)	⁹⁰ Sr	9.3 E-16	7.0 E-07	1.5 E-08
			¹³⁷ Cs	1.8 E-15	1.4 E-06	6.4 E-08
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	3.4 E-15	2.6 E-06	3.6 E-06
			²⁴¹ Pu	1.5 E-15	1.1 E-06	2.3 E-08
			²⁴¹ Am	3.0 E-16	2.2 E-07	4.6 E-07
			gross α	2.6 E-15	2.0 E-06	NF
			gross β	5.3 E-15	4.0 E-06	NF
291-T-1 total dose: 4.2 E-06						
296-P-43 (TF; CH2M HILL; E045)	463 (0.22)	5.0 E+07 (1.4 E+06)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	4.9 E-16	9.4 E-10	NF
			gross β	1.2 E-15	2.4 E-09	NF
			296-P-43 total dose: 0			

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEI, ^f mrem
296-P-44 (TF; CH2M HILL; E046)	472 (0.22)	5.5 E+07 (1.6 E+06)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	≤0	0	NA
			gross β	1.1 E-15	2.4 E-09	NF
296-P-44 total dose: 0						
296-S-21 (TF; CH2M HILL; W2)	75,866 (35.8)	4.0 E+10 (1.1 E+12)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	7.3 E-17	1.1 E-07	1.5 E-07
			gross β	9.0 E-16	1.4 E-06	3.1 E-08
296-S-21 total dose: 1.2 E-10						
296-S-22 (TF; CH2M HILL; W880)	did not operate; declared out of service June 30, 2005					
296-T-18 (TF; CH2M HILL; W882)	270 (0.13)	3.6 E+07 (1.0 E+06)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	5.8 E-17	8.4 E-11	1.2 E-10
			²⁴¹ Pu	≤0	0	0
			²⁴¹ Am	≤0	0	0
			gross α	1.3 E-15	1.9 E-09	NF
gross β	2.8 E-15	4.1 E-09	NF			
296-T-18 total dose: 1.2 E-10						
296-W-4 (WRAP; FH; W123)	14,096 (6.65)	7.4 E+09 (2.1 E+08)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			¹⁵⁵ Eu	1.4 E-16	3.9 E-08	5.9 E-11
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	7.9 E-18	2.3 E-09	3.2 E-09
			²⁴¹ Pu	7.6 E-16	2.2 E-07	4.6 E-09
			²⁴¹ Am	≤0	0	0
gross α	1.3 E-17	3.8 E-09	NF			
gross β	6.8 E-16	1.9 E-07	NF			
296-W-4 total dose: 7.9 E-09						

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEI, ^f mrem
291-Z-1 (PFP, FH; Z810)	290,000 (136.86)	1.5 E+11 (4.3 E+09)	²³⁸ Pu	2.9 E-16	1.4 E-06	1.8 E-06
			^{239/240} Pu	1.3 E-14	6.3 E-05	8.8 E-05
			²⁴¹ Pu	1.2 E-14	5.8 E-05	1.2 E-06
			²⁴¹ Am	2.2 E-15	1.1 E-05	2.3 E-05
			gross α	2.5 E-14	1.2 E-04	NF
			gross β	2.5 E-15	1.3 E-05	2.9 E-07
			291-Z-1 total dose:			
296-Z-3 (PFP, FH; Z813) [under CERCLA ^f]	3,000 (1.42)	1.6 E+09 (4.5 E+07)	²³⁸ Pu	9.6 E-16	4.8 E-08	6.2 E-08
			^{239/240} Pu	4.9 E-16	2.4 E-08	3.4 E-08
			²⁴¹ Pu	2.1 E-15	1.0 E-07	2.1 E-09
			²⁴¹ Am	2.8 E-16	1.4 E-08	2.9 E-08
			gross α	2.5 E-15	1.2 E-07	NF
			gross β	4.8 E-15	2.4 E-07	5.3 E-09
			296-Z-3 total dose:			
296-Z-7 (PFP, FH; Z818)	1,134 (0.54)	6.0 E+08 (1.7 E+07)	²³⁸ Pu	≤0	0	0
			^{239/240} Pu	7.8 E-18	1.7 E-10	2.4 E-10
			²⁴¹ Pu	7.9 E-16	1.7 E-08	3.6 E-10
			²⁴¹ Am	≤0	0	0
			gross α	4.0 E-17	8.6 E-10	NF
			gross β	9.1 E-16	2.0 E-08	4.4 E-10
			296-Z-7 total dose:			
296-Z-14 (PFP, FH; Z814) [under CERCLA ^f]	4,000 (1.89)	2.1 E+09 (6.0 E+07)	²³⁸ Pu	2.7 E-17	2.2 E-09	2.9 E-09
			^{239/240} Pu	1.7 E-17	1.4 E-09	2.0 E-09
			²⁴¹ Pu	2.1 E-15	1.7 E-07	3.6 E-09
			²⁴¹ Am	≤0	0	0
			gross α	2.3 E-16	1.9 E-08	NF
			gross β	2.7 E-15	2.2 E-07	4.8 E-09
			296-Z-14 total dose:			
300 Area Major Point Sources						
EP-324-01-S (324 Building; FH and WCH; F025)	63,408 (29.92)	3.3 E+10 (9.4 E+08)	⁹⁰ Sr	≤0	0	0
			¹³⁷ Cs	≤0	0	0
			²³⁸ Pu	≤0	0	0
			^{239/240} Pu	1.2 E-18	1.3 E-09	1.0 E-07
			²⁴¹ Am	≤0	0	0
			gross α	1.2 E-17	1.3 E-08	NF
			gross β	2.1 E-16	2.3 E-07	NF
EP-324-01-S total dose:						1.0 E-07

Table 2-1. Hanford Site Radionuclide Air Emissions from Major Point Sources in 2005
(major point source: potential of >0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity ^d	Average operating concentration, ^e μCi/mL	Emissions, Ci	EDE to MEI, ^f mrem
EP-325-01-S (325 Building; PNNL; NA)	142,000 (67.0)	7.5 E+10 (2.1 E+09)	³ H (HT)	6.2 E-09	1.3 E+01	2.5 E-03
			³ H (HTO)	3.6 E-08	7.6 E+01	1.4 E-02
			⁹⁰ Sr	3.6 E-17	7.6 E-08	7.6 E-08
			¹³⁷ Cs	2.9 E-17	6.1 E-08	1.3 E-07
			²²⁰ Rn	2.0 E-08	4.3 E+01 ^h	see Table 3-5
			²²² Rn	5.7 E-10	1.2 E+00 ^h	see Table 3-5
			²³⁸ Pu	∅	0	0
			^{239/240} Pu	∅	0	0
			²⁴¹ Pu	∅	0	0
			²⁴¹ Am	∅	0	0
			²⁴³ Am	∅	0	0
			^{243/244} Cm	∅	0	0
			gross α	1.1 E-17	2.4 E-08	2.9 E-06
gross β	7.6 E-17	1.6 E-07	3.5 E-07			
EP-325-01-S total dose: 1.7 E-02						
EP-327-01-S (327 Building; FH and WCH; F026)	42,479 (20.05)	2.2 E+10 (6.3 E+08)	⁹⁰ Sr	3.8 E-17	2.8 E-08	2.8 E-08
			¹³⁷ Cs	5.7 E-16	4.2 E-07	9.2 E-07
			²³⁸ Pu	∅	0	0
			^{239/240} Pu	6.3 E-18	4.6 E-09	3.6 E-07
			²⁴¹ Am	5.8 E-18	4.2 E-09	5.0 E-07
			gross α	2.5 E-16	1.8 E-07	NF
			gross β	2.4 E-15	1.8 E-06	NF
EP-327-01-S total dose: 1.8 E-06						
EP-331-01-V (331 Building; PNNL; NA)	56,000 (26.4)	2.9 E+10 (8.3 E+08)	²³⁸ Pu	∅	0	0
			^{239/240} Pu	5.4 E-18	4.5 E-09	3.5 E-07
			²⁴¹ Am	∅	0	0
			gross α	2.8 E-17	2.3 E-08	2.8 E-06
			gross β	2.6 E-17	2.2 E-07	4.8 E-07
EP-331-01-V total dose: 3.6 E-06						

General definitions: ∅ = analytical result equal to level of laboratory ambient background radioactivity or less than that level, which in practical terms means the radionuclide or type of radioactivity was not detected in the emission sampled; Ci = curie; 1 Ci = 3.7 E+10 becquerels (Bq); ft³ = cubic feet; HT is tritium, or elemental tritium, in the form of an incondensable gas (for purposes of dose modeling, all curies of HT were considered as curies of HTO); HTO is tritiated water vapor, or tritium in the form of condensable water vapor; m³ = cubic meters; min = minute; mrem = millirem; NA = not applicable; NF = not factored (i.e., if an isotopic release is reported, the reported release of the corresponding gross radioactivity type is not included in CAP88-PC calculations); s = second; yr = year.

- ^a Determining the potential prospective dose impact of each point source necessitated using nearest public receptors, who may differ from the annually determined Hanford Site MEI.
- ^b Acronyms in this column are: BHI = Bechtel Hanford, Inc.; CH2M HILL = CH2M HILL Hanford Group, Inc.; EDP code = electronic data processing code, used in chain-of-custody activities to identify sampling locations; FH = Fluor Hanford; PNNL = Pacific Northwest National Laboratory; PFP = Plutonium Finishing Plant; PUREX = Plutonium-Uranium Extraction; TF = Tank Farms; WCH = Washington Closure Hanford, LLC; WESF = Waste Encapsulation and Storage Facility; WRAP = Waste Receiving and Processing Facility.
- ^c Reflects stack flow rate averaged over time of stack operation.
- ^d Radionuclides in bold typeface and within a shaded cell identify those required by 40 CFR 61, Subpart H, for mandatory sampling and analysis and as specified in HNF-1974-1, *Radionuclide National Emission Standards for Hazardous Air Pollutants Potential-to-Emit Assessment*, or as specified by facilities.
- ^e Reflects concentration averaged over time of stack operation.
- ^f EDE for MEI = effective dose equivalent for the maximally exposed individual; for calendar year 2005, the MEI was located near Sagemoor Road, Franklin County, directly across the Columbia River from the Hanford Site 300 Area.
- ^g Emissions from these point sources are associated with cleanup operations conducted under the authority of CERCLA. Reporting those emissions in Table 2-1 demonstrates compliance with the monitoring requirements of 40 CFR 61, Subpart H, which is a substantive equivalent law (i.e., "applicable, relevant, or appropriate requirement") as defined by CERCLA.
- ^h Radon release value conservatively calculated, not actually measured.

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
100 Area Minor Point Sources						
105-KE Basin (100-K Area; FH; Y245, Y246, Y248 [under CERCLA ^f])	30,400 (14.35)	1.4 E+10 (3.9 E+08)	⁹⁰ Sr	2.3 E-14	9.7 E-06	1.5 E-07
			²³⁸ Pu	2.1 E-15	9.2 E-07	8.7 E-07
			^{239/240} Pu	1.5 E-14	6.3 E-06	6.3 E-06
			²⁴¹ Pu	1.3 E-13	5.8 E-05	9.3 E-07
			²⁴¹ Am	1.6 E-14	6.9 E-06	1.1 E-05
			gross α	4.0 E-14	1.7 E-05	NF
			gross β	1.9 E-13	8.0 E-05	NF
105-KE Basin total dose: 1.9 E-05						
105-KW Basin (100-K Area; FH; Y234, Y235, Y236 [under CERCLA ^f])	24,300 (11.47)	7.3 E+09 (2.1 E+08)	⁹⁰ Sr	7.8 E-14	1.8 E-05	2.7 E-07
			²³⁸ Pu	3.2 E-15	7.1 E-07	6.7 E-07
			^{239/240} Pu	2.4 E-14	5.5 E-06	5.5 E-06
			²⁴¹ Pu	3.4 E-13	7.7 E-05	1.2 E-06
			²⁴¹ Am	3.0 E-14	6.8 E-06	1.1 E-05
			gross α	6.9 E-14	1.6 E-05	NF
			gross β	4.7 E-13	1.1 E-04	NF
105-KW Basin total dose: 1.9 E-05						
107-N (100 N Area; BHI and WCH; Y265 [under CERCLA ^f])	7,700 (3.63)	4.0 E+09 (1.1 E+08)	gross α	≤ 0	0	0
			gross β	3.0 E-15	4.7 E-07	7.0 E-09
107-N total dose: 7.0 E-09						
1706-KE (100-K Area; FH; Y243)	12,000 (5.66)	3.5 E+07 (9.8 E+05)	gross α	≤ 0	0	0
			gross β	7.1 E-15	9.5 E-09	1.4 E-10
1706-KE total dose: 1.4 E-10						
200 East Area Minor Point Sources						
296-A-10 (PUREX; FH; A550)	did not operate					
296-A-18 (TF; CH2M HILL; E060)	1,182 (0.56)	6.2 E+08 (1.8 E+07)	gross α	1.0 E-15	2.4 E-08	3.1 E-08
			gross β	3.0 E-15	7.2 E-08	1.4 E-09
296-A-18 total dose: 3.2 E-08						
296-A-19 (TF; CH2M HILL; E061)	927 (0.44)	4.9 E+08 (1.4 E+07)	gross α	1.5 E-15	2.8 E-08	3.6 E-08
			gross β	4.8 E-15	9.0 E-08	1.8 E-09
296-A-19 total dose: 3.8 E-08						
296-A-20 (TF; CH2M HILL; E197)	2,125 (1.00)	1.1 E+09 (3.2 E+07)	gross α	2.5 E-16	9.3 E-09	1.2 E-08
			gross β	1.1 E-15	4.1 E-08	8.2 E-10
296-A-20 total dose: 1.3 E-08						
296-A-21 (242-A Evaporator; CH2M HILL; E645)	15,234 (7.19)	6.6 E+09 (1.9 E+08)	gross α	5.2 E-16	1.2 E-07	1.6 E-07
			gross β	1.3 E-15	3.0 E-07	6.0 E-09
296-A-21 total dose: 1.7 E-07						

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
296-A-22 (242-A Evaporator; CH2M HILL; E643)	476 (0.22)	2.5 E+08 (7.1 E+06)	⁹⁰ Sr	≤ 0	0	0
			¹³⁷ Cs	1.3 E-15	1.1 E-08	4.7 E-10
			²³⁸ Pu	≤ 0	0	0
			^{239/240} Pu	2.5 E-18	2.3 E-11	3.0 E-11
			²⁴¹ Am	1.4 E-17	1.2 E-10	2.3 E-10
			gross α	4.0 E-16	3.5 E-09	NF
			gross β	4.5 E-15	4.0 E-08	NF
296-A-22 total dose: 7.3 E-10						
296-A-26 (TF; CH2M HILL; E297)	1,336 (0.63)	3.2 E+08 (9.1 E+06)	gross α	1.6 E-16	2.0 E-09	2.6 E-09
			gross β	5.2 E-16	6.4 E-09	1.3 E-10
296-A-26 total dose: 2.7 E-09						
296-A-27 (TF; CH2M HILL; E270)	862 (0.41)	4.5 E+08 (1.3 E+07)	gross α	1.0 E-16	2.5 E-09	3.2 E-09
			gross β	1.2 E-15	3.0 E-08	6.0 E-10
296-A-27 total dose: 3.8 E-09						
296-A-28 (TF; CH2M HILL; E272)	6,104 (2.88)	3.2 E+09 (9.1 E+07)	gross α	6.3 E-16	1.2 E-07	1.6 E-07
			gross β	1.4 E-15	2.7 E-07	5.4 E-09
296-A-28 total dose: 1.7 E-07						
296-A-29 (TF; CH2M HILL; E901)	763 (0.36)	4.0 E+08 (1.1 E+07)	gross α	7.1 E-17	1.5 E-09	1.9 E-09
			gross β	4.7 E-15	1.0 E-07	2.0 E-09
296-A-29 total dose: 3.9 E-09						
296-A-30 (TF; CH2M HILL; E903)	7,300 (3.45)	3.8 E+09 (1.1 E+08)	gross α	8.7 E-16	1.7 E-07	2.2 E-07
			gross β	3.0 E-15	5.8 E-07	1.2 E-08
296-A-30 total dose: 2.3 E-07						
296-A-40 (TF; CH2M HILL; E013)	884 (0.42)	4.6 E+08 (1.3 E+07)	gross α	1.2 E-16	2.0 E-09	2.6 E-09
			gross β	2.1 E-15	3.5 E-08	7.0 E-10
296-A-40 total dose: 3.3 E-09						
296-A-41 (TF; CH2M HILL; E015)	8,292 (3.91)	4.4 E+09 (1.2 E+08)	gross α	1.2 E-15	1.8 E-07	2.3 E-07
			gross β	1.7 E-15	2.7 E-07	5.4 E-09
296-A-41 total dose: 2.4 E-07						
296-A-43 (TF; CH2M HILL; E148)	857 (0.40)	4.0 E+08 (1.1 E+07)	gross α	1.1 E-16	1.8 E-09	2.3 E-09
			gross β	3.5 E-16	5.4 E-09	1.1 E-10
296-A-43 total dose: 2.4 E-09						
296-E-1 (ETF; FH; E036)	55,773 (26.32)	2.9 E+10 (8.3 E+08)	gross α	1.5 E-16	1.7 E-07	2.2 E-07
			gross β	5.3 E-16	6.0 E-07	1.2 E-08
296-E-1 total dose: 2.3 E-07						

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
296-P-31 (209-E; FH; E209)	1,073 (0.51)	5.2 E+08 (1.5 E+07)	⁹⁰ Sr	≤ 0	0	0
			¹³⁷ Cs	≤ 0	0	0
			²³⁸ Pu	≤ 0	0	0
			^{239/240} Pu	4.3 E-17	7.0 E-10	9.1 E-10
			²⁴¹ Am	1.8 E-17	3.0 E-10	5.7 E-10
			gross α	2.7 E-16	4.4 E-09	NF
			gross β	1.7 E-15	2.8 E-08	5.6 E-10
296-P-31 total dose: 2.0 E-09						
200 West Area Minor Point Sources						
291-S-1 (REDOX Plant; FH; S006)	21,376 (10.09)	1.1 E+10 (3.2 E+08)	gross α	4.1 E-16	1.8 E-07	2.5 E-07
			gross β	1.9 E-15	8.2 E-07	1.8 E-08
291-S-1 total dose: 2.7 E-07						
296-P-22 (TF; CH2M HILL; W191)	807 (0.38)	4.2 E+08 (1.2 E+07)	gross α	3.2 E-16	4.8 E-09	6.7 E-09
			gross β	7.7 E-16	1.2 E-08	2.6 E-10
296-P-22 total dose: 7.0 E-09						
296-P-28 (TF; CH2M HILL; W195)	did not operate					
296-S-15 (TF; CH2M HILL; W111)	did not operate					
296-S-16 (222-S; CH2M HILL; S264)	20 (0.01)	1.1 E+07 (3.0 E+05)	gross α	6.3 E-16	2.6 E-10	3.6 E-10
			gross β	6.0 E-15	2.5 E-09	5.5 E-11
296-S-16 total dose: 4.2 E-10						
296-S-18 (TF; CH2M HILL; W096)	4,909 (2.32)	1.1 E+09 (3.1 E+07)	gross α	9.8 E-16	4.4 E-08	6.2 E-08
			gross β	3.5 E-15	1.6 E-07	3.5 E-09
296-S-18 total dose: 6.5 E-08						
296-S-25 (TF; CH2M HILL; W145) [alternate: 296-P-23 (W190)]	920 (0.43) [1,017 (0.41)]	4.5 E+08 (1.3 E+07)	⁹⁰ Sr	≤ 0	0	0
			¹³⁷ Cs	≤ 0	0	0
			²³⁸ Pu	≤ 0	0	0
			^{239/240} Pu	≤ 0	0	0
			²⁴¹ Am	3.6 E-18	6.0 E-11	1.3 E-10
			gross α	1.8 E-16	3.0 E-09	NF
			gross β	7.7 E-16	1.3 E-08	NF
296-S-25 and 296-P-23 total dose: 1.3 E-10						
296-T-7 (T Plant; FH; T154)	2,756 (1.30)	1.2 E+09 (3.5 E+07)	gross α	≤ 0	0	0
			gross β	1.5 E-15	7.8 E-08	1.7 E-09
296-T-7 total dose: 1.7 E-09						
296-T-17 (TF; CH2M HILL; W117)	did not operate					

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
291-U-1 (U Plant; FH; U771 [under CERCLA ^f])	25,376 (11.98)	1.3 E+10 (3.8 E+08)	gross α	≤ 0	0	0
			gross β	9.7 E-15	5.0 E-06	1.1 E-07
291-U-1 total dose: 1.1 E-07						
296-W-3 (TF; CH2M HILL; W003)	did not operate					
296-Z-5 (FPF; FH; Z913)	8,902 (4.20)	4.7 E+09 (1.3 E+08)	gross α	≤ 0	0	0
			gross β	1.5 E-15	2.7 E-07	5.9 E-09
296-Z-5 total dose: 5.9 E-09						
296-Z-6 (FPF; FH; Z802)	9,935 (4.69)	5.2 E+09 (1.5 E+08)	gross α	≤ 0	0	0
			gross β	7.7 E-16	1.6 E-07	3.5 E-09
296-Z-6 total dose: 3.5 E-09						
296-Z-15 (FPF; FH; Z915) [under CERCLA ^f])	1,561 (0.74)	8.2 E+08 (2.3 E+07)	gross α	≤ 0	0	0
			gross β	≤ 0	0	0
296-Z-15 total dose: 0						
300 Area Minor Point Sources						
340-B (340 Complex; FH; F008)	did not operate					
340-DECON (340 Complex; FH; F009)	7,509 (3.54)	3.9 E+09 (1.1 E+08)	gross α	2.9 E-16	4.4 E-08	3.4 E-06
			gross β	4.6 E-15	7.0 E-07	7.0 E-07
340-DECON total dose: 4.1 E-06						
340-NT-EX (340 Complex; FH; F002)	1,602 (0.76)	8.4 E+08 (2.4 E+07)	⁹⁰ Sr	≤ 0	0	0
			¹³⁷ Cs	≤ 0	0	0
			^{239/240} Pu	≤ 0	0	0
			²⁴¹ Am	≤ 0	0	0
			gross α	4.0 E-17	1.1 E-09	NF
			gross β	3.4 E-16	9.3 E-09	NF
340-DECON total dose: 0						
EP-305B-01-S (305B Building; PNNL; NA)	900 (0.43)	4.7 E+08 (1.3 E+07)	gross α	4.8 E-17	6.4 E-10	7.7 E-08
			gross β	1.5 E-16	2.0 E-09	4.4 E-09
EP-305B-01-S total dose: 8.1 E-08						
EP-306W-03-V (306W Building; PNNL and WCH; NA)	did not operate; permanently closed					
EP-318-01-S (318 Building; PNNL; NA)	620 (0.29)	3.3 E+08 (9.2 E+06)	gross α	8.3 E-17	7.7 E-10	9.2 E-08
			gross β	8.7 E-16	8.0 E-09	1.8 E-08
EP-318-01-S total dose: 1.1 E-07						

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
EP-320-01-S (320 Building; PNNL; NA)	27,200 (12.84)	1.4 E+10 (4.0 E+08)	gross α	6.0 E-17	2.4 E-08	2.9 E-06
			gross β	3.5 E-15	1.4 E-06	3.6 E-06
			EP-320-01-S total dose: 6.5 E-06			
EP-320-02-S (320 Building; PNNL; NA)	450 (0.21)	2.4 E+08 (6.7 E+06)	gross α	1.3 E-16	8.6 E-10	1.0 E-07
			gross β	5.3 E-15	3.6 E-08	7.9 E-08
			EP-320-02-S total dose: 1.8 E-07			
EP-320-03-S (320 Building; PNNL; NA)	did not operate; permanently closed					
EP-320-04-S (320 Building; PNNL; NA)	390 (0.18)	2.0 E+08 (5.8 E+06)	gross α	≤ 0	0	0
			gross β	1.6 E-15	9.4 E-09	4.2 E-09
			EP-320-04-S total dose: 4.2 E-09			
EP-323-01-S (323 Building; PNNL; NA)	3,100 (1.46)	1.6 E+09 (4.6 E+07)	gross α	8.0 E-16	3.7 E-08	4.4 E-06
			gross β	5.7 E-15	2.6 E-07	5.7 E-07
			EP-323-01-S total dose: 5.0 E-06			
EP-326-01-S (326 Building; PNNL; NA)	53,000 (25)	2.8 E+10 (7.9 E+08)	¹³³ Xe	1.3 E-17	1.0 E-08	5.9 E-13
			¹³⁵ Xe	7.6 E-17	6.0 E-08	2.2 E-12
			gross α	4.4 E-16	3.5 E-07	4.2 E-05
			gross β	7.0 E-15	5.6 E-06	1.2 E-05
			EP-326-01-S total dose: 5.4 E-05			
EP-327-02-V (327 Building; FH and WCH; F027)	626 (0.30)	3.3 E+08 (9.2 E+06)	gross α	≤ 0	0	0
			gross β	6.2 E-16	6.5 E-09	6.8 E-09
			EP-327-02-V total dose: 6.8 E-09			
EP-329-01-S (329 Building; PNNL; NA)	45,200 (21.33)	2.4 E+10 (6.7 E+08)	^{131m} Xe	1.5 E-15	1.0 E-06	5.9 E-13
			¹³³ Xe	1.8 E-16	1.2 E-07	5.9 E-13
			¹³⁵ Xe	1.5 E-17	1.0 E-08	2.2 E-12
			gross α	4.8 E-17	3.2 E-08	3.8 E-06
			gross β	7.3 E-17	4.9 E-08	1.1 E-07
			EP-329-01-S total dose: 3.9 E-06			
EP-3730-01-S (3730 Building; PNNL; NA)	210 (0.10)	1.1 E+08 (3.1 E+06)	gross α	2.4 E-16	7.6 E-10	9.1 E-08
			gross β	4.5 E-16	1.4 E-09	3.1 E-09
			EP-3730-01-S total dose: 9.4 E-08			
RCF-2-EX (MO-423; BHI and WCH; Y216)	622 (0.29)	2.7 E+08 (7.6 E+06)	¹³⁷ Cs	≤ 0	0	0
			gross α	6.1 E-17	6.3 E-10	4.9 E-08
			gross β	7.9 E-16	8.2 E-09	8.2 E-09
			RCF-2-EX total dose: 5.7 E-08			
400 Area Minor Point Sources						
437-1-61 (MASF; FH; F019)	14,600 (6.89)	7.7 E+09 (2.2 E+08)	gross α	≤ 0	0	0
			gross β	1.7 E-15	5.0 E-07	1.3 E-07
			437-1-61 total dose: 1.3 E-07			

Table 2-2. Hanford Site Radionuclide Air Emissions from Minor Point Sources in 2005
(minor point source: potential of ≤ 0.1 mrem/yr EDE to nearest public receptor)^a

Stack (facility; contractor; EDP Code) ^b	Average operating flow rate, ^c ft ³ /min (m ³ /s)	Volume, ft ³ (m ³)	Radionuclide or type of radioactivity	Average operating concentration, ^d μ Ci/mL	Emissions, Ci	EDE to MEI, ^e mrem
437-MN&ST (MASF; FH; F014)	14,293 (6.75)	7.5 E+09 (2.1 E+08)	gross α	≤ 0	0	0
			gross β	2.6 E-15	8.4 E-07	2.1 E-07
437-MN&ST total dose: 2.1 E-07						
FFTF-CB-EX (FFTF; FH; F011)	17,076 (8.06)	9.0 E+09 (2.5 E+08)	³ H	≤ 0	0	0
			gross α	2.9 E-17	1.0 E-08	8.6 E-08
			gross β	8.9 E-15	3.1 E-06	7.7 E-07
FFTF-CB-EX total dose: 8.6 E-07						
FFTF-HT-TR (FFTF; FH; F013)	5,417 (2.56)	2.8E+09 (8.1E+07)	gross α	4.0 E-17	4.4 E-09	3.8 E-08
			gross β	8.5 E-15	9.4 E-07	2.4 E-07
FFTF-HT-TR total dose: 2.8 E-07						
FFTF-RE-SB (FFTF; FH; F012)	12,650 (5.97)	6.6 E+09 (1.9 E+08)	gross α	1.1 E-15	2.8 E-07	2.4 E-06
			gross β	1.4 E-14	3.5 E-06	8.8 E-07
FFTF-RE-SB total dose: 3.3 E-06						
600 Area Minor Point Sources						
696-W-1 (WSCF; FH; W010)	48,752 (23.01)	2.6 E+10 (7.3 E+08)	gross α	≤ 0	0	0
			gross β	2.5 E-16	2.5 E-07	5.5 E-09
696-W-1 total dose: 5.5 E-09						
696-W-2 (WSCF; FH; W011)	1,052 (0.50)	5.5 E+08 (1.6 E+07)	gross α	≤ 0	0	0
			gross β	2.6 E-15	5.5 E-08	1.2 E-09
696-W-2 total dose: 1.2 E-09						

General definitions: ≤ 0 = analytical result equal to level of laboratory ambient background radioactivity or less than that level, which in practical terms means the radionuclide or type of radioactivity was not detected in the emission sampled; Ci = curie; 1 Ci = 3.7 E+10 becquerels (Bq); ft³ = cubic feet; HT is tritium, or elemental tritium, in the form of an incondensable gas (for purposes of dose modeling, all curies of HT were considered as curies of HTO); HTO is tritiated water vapor, or tritium in the form of condensable water vapor; m³ = cubic meters; min = minute; mrem = millirem; NA = not applicable; NF = not factored (i.e., if an isotopic release is reported, the reported release of the corresponding gross radioactivity type is not included in CAP88-PC calculations); s = second; yr = year.

^a Determining the potential prospective dose impact of each point source necessitated using nearest public receptors, who may differ from the annually determined Hanford Site MEI.

^b Acronyms in this column are: BHI = Bechtel Hanford, Inc.; CH2M HILL = CH2M HILL Hanford Group, Inc.; EDP code = electronic data processing code, used in chain-of-custody activities to identify sampling locations; FFTF = Fast Flux Test Facility; FH = Fluor Hanford; MASF = Maintenance and Storage Facility; PNNL = Pacific Northwest National Laboratory; PFP = Plutonium Finishing Plant; TF = Tanks Farms; WCH = Washington Closure Hanford, LLC; and WSCF = Waste Sampling and Characterization Facility.

^c Reflects stack flow rate averaged over time of stack operation.

^d Reflects concentration averaged over time of stack operation.

^e EDE for MEI = effective dose equivalent for the maximally exposed individual; for calendar year 2005, the MEI was located near Sagemoor Road, Franklin County, directly across the Columbia River from the Hanford Site 300 Area.

^f Emissions from these point sources are associated with cleanup operations conducted under the authority of CERCLA. Reporting those emissions in Table 2-2 demonstrates compliance with the monitoring requirements of 40 CFR 61, Subpart H, which is a substantive equivalent law (i.e., "applicable, relevant, or appropriate requirement") as defined by CERCLA.

Table 2-3. Hanford Site Major Stack Heights and Emission Controls.

Stack	Discharge height, ft (m)	Emission control
100 Area Major Point Sources		
105-KE Purge Vent (Y267)	10 (3.0)	Versapor 3000
105-KE Purge Vent (Y268)	10 (3.0)	Versapor 3000
105-KW Air Sparging Vent	48 (14.6)	HEPA
296-K-142	90 (27.4)	HEPA
200 East Area Major Point Sources		
291-A-1	200 (61)	HEPA
296-A-42	55 (16.8)	HEPA
296-B-1	90 (27.4)	HEPA
296-B-10	75 (22.9)	HEPA
296-B-28	11 (3.4)	HEPA
296-C-5	50 (15.2)	HEPA
296-C-6	9 (2.7)	HEPA
296-H-212	75 (22.9)	HEPA
296-P-32	15 (4.6)	HEPA
296-P-33	15 (4.6)	HEPA
296-P-34	15 (4.6)	HEPA
296-P-45	15 (4.6)	HEPA
296-P-47	15 (4.6)	HEPA
296-P-48	15 (4.6)	HEPA
200 West Area Major Point Sources		
296-P-43	15 (4.6)	HEPA
296-P-44	15 (4.6)	HEPA
296-S-21	38 (11.6)	HEPA
296-S-22	11 (3.4)	HEPA
291-T-1	200 (61)	HEPA
296-T-18	11 (3.4)	HEPA
296-W-4	47 (14.2)	HEPA
291-Z-1	200 (61)	HEPA
296-Z-3	24 (7.2)	HEPA
296-Z-7	50 (15.2)	HEPA
296-Z-14	20 (6.1)	HEPA
300 Area Major Point Sources		
EP-324-01-S	150 (46)	HEPA
EP-325-01-S	89 (27.1)	HEPA
EP-327-01-S	42.8 (13.1)	HEPA
EP-331-01-V	62 (18.9)	HEPA

Table 2-4. Hanford Site Minor Stack Heights and Emission Controls.

Stack	Discharge height, ft (m)	Emission control
100 Area Minor Point Sources		
105-KE Basin	42 (12.8)	none
105-KW Basin	42 (12.8)	none
107-N	27.0 (8.2)	HEPA
1706-KE	25 (7.6)	HEPA
200 East Area Minor Point Sources		
296-A-10	15.0 (4.6)	HEPA
296-A-18	12.5 (3.8)	HEPA
296-A-19	12.9 (3.9)	HEPA
296-A-21	22 (6.7)	HEPA
296-A-22	61 (18.6)	HEPA
296-A-20	15.7 (4.8)	HEPA
296-A-26	27 (8.2)	HEPA
296-A-27	15.8 (4.8)	HEPA
296-A-28	23 (7.0)	HEPA
296-A-29	14.9 (4.5)	HEPA
296-A-30	23 (7.0)	HEPA
296-A-40	13.3 (4.1)	HEPA
296-A-41	29.2 (8.9)	HEPA
296-A-43	35.5 (10.8)	HEPA
296-E-1	51 (15.5)	HEPA
296-P-31	33 (10)	HEPA
200 West Area Minor Point Sources		
296-P-22	10.2 (3.1)	HEPA
296-P-23	15 (4.6)	HEPA
296-S-15	15 (4.6)	HEPA
296-S-18	22 (6.7)	HEPA
296-S-25	15 (4.6)	HEPA
296-T-17	32 (9.8)	HEPA
291-S-1	200 (61)	sand filter
296-S-16	9.8 (3)	HEPA
296-T-7	28 (8.5)	HEPA
291-U-1	200 (61)	sand filter
296-W-3	25 (7.6)	HEPA
296-Z-5	28 (8.5)	HEPA
296-Z-6	15 (4.5)	HEPA
296-Z-15	42 (12.8)	HEPA
300 Area Minor Point Sources		
340-B	37 (11.3)	HEPA
340-DECON	27 (8.2)	HEPA
340-NT-EX	20 (6.1)	HEPA
EP-305B-01-S	33 (10)	HEPA
EP-306W-03-V	NA	
EP-318-01-S	29 (8.8)	HEPA

Table 2-4. Hanford Site Minor Stack Heights and Emission Controls.

Stack	Discharge height, ft (m)	Emission control
EP-320-01-S	40 (12.1)	HEPA
EP-320-02-S	32 (9.7)	HEPA
EP-320-03-S	NA	
EP-320-04-S	26 (7.9)	HEPA
EP-323-01-S	16 (4.9)	HEPA
EP-326-01-S	47.6 (14.5)	HEPA
EP-327-02-V	29.5 (9)	HEPA
EP-329-01-S	62.6 (19.1)	HEPA
EP-3730-01-S	19.4 (5.9)	HEPA
RCF-2-EX	9.8 (3)	HEPA
400 Area Minor Point Sources		
437-1-61	38.4 (11.7)	HEPA
437-MN&ST	30 (9.1)	HEPA
FFTF-CB-EX	47 (14.3)	none
FFTF-HT-TR	29 (8.8)	none
FFTF-RE-SB	20 (6.1)	none
600 Area Minor Point Sources		
696-W-1	25 (7.6)	HEPA
696-W-2	32 (9.8)	HEPA

Table 2-5. Distances and Directions from Hanford Site Operational Areas to Receptors at Respective Nearest Residences.^a

Receptor		Distance (km [mi]) and direction from Hanford Site operational area ^b				
		100 Area	200-E Area	200-W Area	300 Area	400 Area
Offsite residence	Hanford Site MEI ^c	40.6 (25.2) SE	28.3 (17.6) SE	35.1 (21.8) SE	1.4 (0.87) E	10.8 (6.7) SE
	Nearest	11.2 (7.0) NNW	21.2 (13.2) E	13.7 (8.5) W	1.4 (0.87) E	8.6 (5.5) E
	Nearest in prevailing wind	24.2 (15.1) E	21.2 (13.2) E	27.2 (16.9) SE	3.4 (2.1) S	10.8 (6.7) SE
Onsite public receptor	Nearest ^d	28.2 (17.5) SE	17.0 (10.6) SE	24.5 (15.2) ESE	12.3 (7.6) WNW	4.4 (2.7) SE
	Nearest in prevailing wind	26.1 (16.2) SE	16.7 (10.4) ESE	33.6 (20.9) ESE	0.31 (0.19) WNW	4.3 (2.7) NNE
Vegetable-producing farm	Nearest	9.8 (6.1) NW	21.1 (13.1) E	17.7 (11.0) NW	3.2 (2.0) E	10.5 (6.5) ESE
	Nearest in prevailing wind	24.9 (15.5) E	21.1 (13.1) E	29.9 (18.6) E and 29.9 (18.6) SE	4.0 (2.5) NE	12.6 (7.8) SE
Milk-producing farm	Nearest	34.9 (21.7) E	29.1 (18.1) ENE	34.6 (21.5) S	5.8 (3.6) ESE	13.5 (8.3) E
	Nearest in prevailing wind	34.9 (21.7) E	30.6 (19.0) ESE	38.9 (24.2) ESE	9.2 (5.7) NE	15.3 (9.5) SE
Meat-producing farm	Nearest	11.2 (7.0) NNW	20.9 (13.0) WNW	17.7 (11.0) WSW	2.7 (1.7) ESE	12.2 (7.6) SE
	Nearest in prevailing wind	31.4 (19.5) ESE	24.0 (14.9) E	27.0 (16.8) SE	8.0 (5.0) NE	12.2 (7.6) SE

^a The definition of residence includes dwelling, school, business, or office.

^b All emission points within an emission Area are assigned a single distance to the nearest receptor; km = kilometer; mi = mile.

^c A member of the public who lives at a residence near Sagemoor Road, in Franklin County, directly across the Columbia River from the Hanford Site 300 Area.

^d The nearest onsite receptor is employed at the Laser Interferometer Gravitational Wave Observatory (LIGO). This receptor, who from year to year could be but is not necessarily the MEI, is a member of the public not employed by DOE or its contractors and who works on the Hanford Site at a location to which access is not controlled by DOE. For radiological dose impacts from emissions in 2005, numerous offsite public receptors and onsite public receptors were evaluated. The evaluations determined that an offsite receptor near Sagemoor Road, in Franklin County, received the maximum dose due to air emissions from all Hanford Site sources during 2005. For onsite receptors, two employment locations were evaluated: LIGO and ENCGS.

3.0 POINT SOURCE EMISSION DOSE ASSESSMENTS

3.1 DESCRIPTION OF POINT SOURCE EMISSIONS DOSE MODEL

The CAP88-PC computer code (EPA 1992) was used to determine the compliance status of Hanford Site radionuclide air emissions with the 10 mrem/yr EDE standard set in both Subpart H of 40 CFR 61 and in WAC 246-247. Because the Hanford Site has numerous and widely separated emission points, it is necessary to determine the point at which the maximum dose would be received from the combined air emissions released from all locations. To model the doses from those emissions, each of the five major operational areas is assigned within it a single reference facility having an emission point that typically is the source of maximum emissions from that Area to the Hanford Site MEI. The straight-line distances and directions to the MEI from each of the five reference facilities are used in the dose calculations, which include annual meteorological data (refer to Appendix A). In 2005, those reference facilities were the 105-KE Building in the 100 Areas; the PUREX Facility in the 200 East Area; PFP in the 200 West Area; the 325 Building in the 300 Area; and FFTF in the 400 Area.

Starting in 2000, a new category of members of the public had to be evaluated when determining the MEI. Previously, only the offsite public was considered. Private-sector reindustrialization at the Hanford Site forced a broadening of the MEI definition to include members of the public not employed by DOE and whose workplace is within the boundaries of the Hanford Site yet outside DOE-controlled areas. Under this new definition, the MEI location in 2000 shifted from an offsite residence near Sagemoor Road, in Franklin County, to a Washington State University laboratory in the 300 Area, north of Richland. In 2001, the location changed to the 313 Building, also in the 300 Area. In early 2002, employment at the WSU laboratory and the 313 Building ceased, causing the MEI to shift back to the offsite Sagemoor Road location, where again in 2003 the MEI resided. For 2004, the MEI location shifted to Ringold, owing mainly to reduced point source emissions from the 300 Area and a higher dose from diffuse and fugitive emissions at Ringold. And for 2005, the MEI location returned to the Sagemoor Road residence. The principal locations evaluated for the MEI are shown in Figure 3-1.

3.2 SUMMARY OF INPUT PARAMETERS

Dose calculations were performed using established standard parameters for the Hanford Site and its environment (PNL-3777, Rev. 2). Point source emissions data by radionuclide and operational area (refer to Table 3-1) were used in the dose calculations. The calculations used an effective discharge height of 33 ft (10 m) for all release locations other than the 200 Area facilities, which were assumed to have an effective release height of 292 ft (89 m; HNF-3602-1). Emissions reported as gross alpha or gross beta were mostly evaluated respectively as ^{239}Pu or ^{90}Sr . In the case of PNNL emissions, gross alpha and gross beta data were modeled respectively as ^{241}Am or ^{137}Cs , and in the 400 Area, emissions reported as gross beta were modeled as ^{137}Cs , based on facility-specific information.

Radionuclide data used for dose calculations are in Appendix A; all other radionuclide-specific parameters were default values provided in CAP88-PC data libraries. Maximum individual exposure and consumption parameters were those determined previously for the Hanford Site. The entire MEI diet was constructed using the "local" food production option in CAP88-PC for ingestion-pathway parameters. Radionuclide air concentrations at receptor locations were determined using site-specific meteorological data for each representative release location. Joint-frequency distributions and CAP88-PC wind files were prepared from data collected at weather stations in each of the operational areas and represent the average of hourly data taken during 2005. These data were used in determining the annual average dispersion coefficients in 2005 for each of the operational areas.

Table 3-1. Hanford Site Radionuclide Air Emissions from Point Sources in 2005.

Radionuclide	Releases, Ci ^a					
	100 Areas	200 East Area	200 West Area	300 Area	400 Area	Total
³ H (as HT) ^b	NM	NM	NM	1.3 E+01	NM	1.3 E+01
³ H (as HTO) ^c	NM	NM	NM	7.6 E+01	ND	7.6 E+01
⁹⁰ Sr	2.8 E-05 ^d	3.3 E-05 ^d	2.2 E-05 ^d	1.1 E-06 ^d	NM	8.4 E-05 ^d
¹²⁹ I	NM	1.3 E-03	NM	NM	NM	1.3 E-03
^{131m} Xe	NM	NM	NM	1.0 E-06 ^e	NM	1.0 E-06 ^e
¹³³ Xe	NM	NM	NM	1.3 E-07 ^e	NM	1.3 E-07 ^e
¹³⁵ Xe	NM	NM	NM	7.0 E-08 ^e	NM	7.0 E-08 ^e
¹³⁷ Cs	NM	3.4 E-05	1.4 E-06	8.2 E-06 ^f	8.9 E-06 ^g	5.3 E-05 ^{fg}
¹⁵⁵ Eu	NM	NM	3.9 E-08	ND	NM	3.9 E-08 ^g
²²⁰ Rn	NM	NM	NM	4.3 E+01 ^e	NM	4.3 E+01 ^e
²²² Rn	NM	NM	NM	1.2 E+00 ^e	NM	1.2 E+00 ^e
²³⁸ Pu	1.6 E-06	5.4 E-08	1.5 E-06	ND	NM	3.2 E-06
^{239/240} Pu	1.2 E-05 ^h	2.6 E-06 ^g	6.6 E-05 ^h	6.9 E-08 ^h	3.0 E-07 ^h	8.1 E-05 ^h
²⁴¹ Pu	1.3 E-04	ND	6.0 E-05	ND	NM	1.9 E-04
²⁴¹ Am	1.4 E-05	3.7 E-06	1.1 E-05	4.9 E-07 ⁱ	NM	2.9 E-05 ⁱ
²⁴³ Am	NM	NM	NM	ND	NM	ND
^{243/244} Cm	NM	NM	NM	ND	NM	ND

^a 1 Ci = 1 curie = 3.7 E+10 becquerels (Bq); ND = not detected (i.e., either the radionuclide was not detected in any sample during the year or the average of all the measurements for that given radionuclide or type of radioactivity made during the year was below background levels); NM = not measured.

^b HT = tritium in the form of incondensable gas.

^c HTO = tritium in the form of condensable water vapor.

^d This release value includes gross beta data, assumed to be ⁹⁰Sr in dose calculations.

^e Calculated release based on inventory and project process.

^f Included in this value were 7.7 E-06 Ci of gross beta activity, assumed to be ¹³⁷Cs in dose calculations.

^g This release value derives entirely from gross beta data, assumed to be ¹³⁷Cs in dose calculations.

^h This release value includes gross alpha data, assumed to be ^{239/240}Pu in dose calculations.

ⁱ Included in this value were 4.9 E-07 Ci of gross alpha, assumed to be ²⁴¹Am in dose calculations.

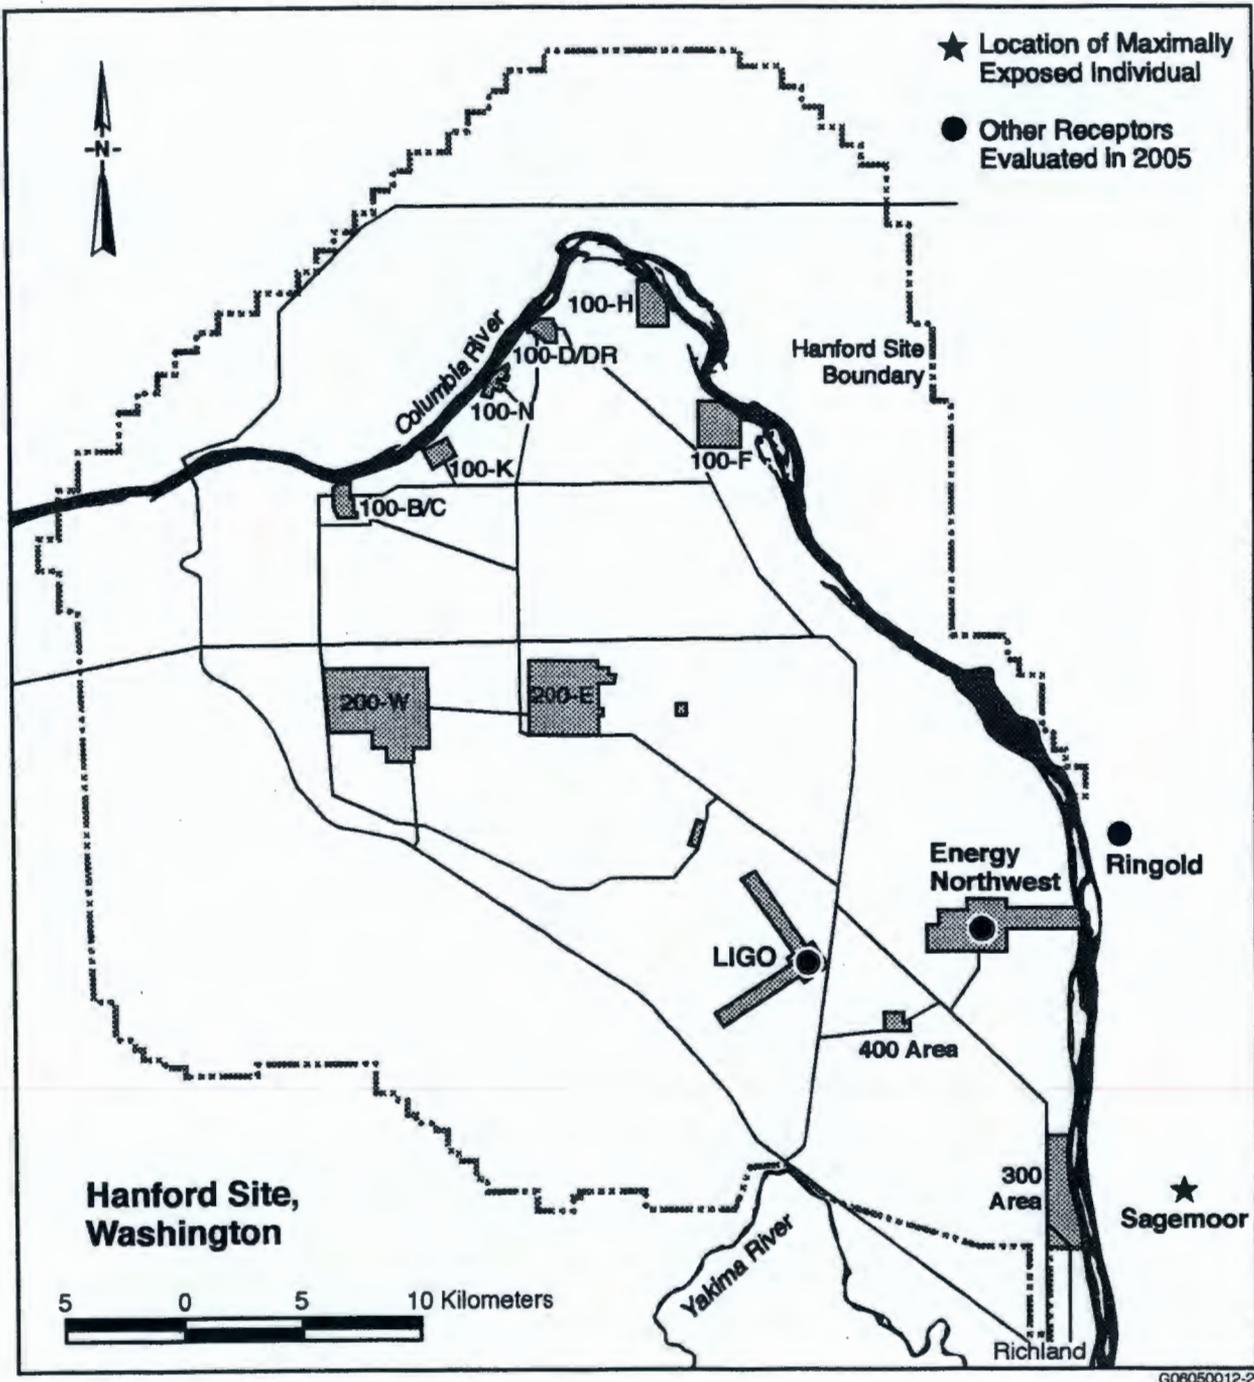


Figure 3-1. Locations of Hanford Site Maximally Exposed Individual and Other Evaluated Receptor Locations for 2005.

3.3 COMPLIANCE ASSESSMENT

3.3.1 40 Code of Federal Regulations 61, Subpart H, Regulatory Standard

The regulatory standard for a maximum dose to any member of the public is 10 mrem/yr EDE. The standard is in 40 CFR 61, Subpart H, and applies to radionuclide air emissions from DOE facilities. For calendar year 2005, the MEI location was near Sagemoor Road, Franklin County, Washington, directly east of the 300 Area. The combined dose to the MEI from routine and nonroutine Hanford Site point source emissions was 0.018 mrem (0.00018 mSv) EDE. The majority of that dose (98.0 %) is attributable to ^3H emitted in the 300 Area (refer to Table 3-2). Table 3-3 shows the contribution to the MEI dose from each major stack, grouped by operational area. Table 3-4 ranks each stack by the dose attributable to its emissions compared to the total MEI dose from all point source emissions.

Figure 3-2 displays the MEI doses attributable to radionuclide emissions from Hanford Site point sources since 1990, the first year this style of annual report was issued to comply with the requirements of the Clean Air Act Amendments of 1989. Doses from 1990 through 1992 were modeled using CAP-88 (Clean Air Act Assessment Package-1988, a mainframe version) and an MEI location at Ringold, in Franklin County, northeast of the 300 Area. Doses from 1993 to present were modeled using CAP88-PC, the desktop computer version of CAP-88 that relies more on default parameters than does the mainframe version. The MEI location from 1993 through 1999 was at Sagemoor Road, but changed in 2000 to an onsite WSU Laboratory and then in 2001 to the 313 Building, both of which are in the 300 Area; by early 2002, non-DOE-related employment had ended at both those locations. In 2002 and 2003, the MEI location reverted to Sagemoor Road, but in 2004, the MEI location shifted back to Ringold, owing to a higher dose from diffuse and fugitive emissions compared to that source of dose at Sagemoor Road. In 2005, however, because of higher tritium (^3H) emissions in the 300 Area, the MEI is once again near Sagemoor Road.

The estimated dose attributable to diffuse and fugitive emissions to the MEI at the Sagemoor Road location in 2005 was 0.021 mrem (0.00021 mSv) EDE. The total dose from point source emissions and from diffuse and fugitive emissions to the MEI in 2005 is 0.039 mrem (0.00039 mSv) EDE (i.e., 0.018 mrem [0.00018 mSv] EDE) from point sources and 0.021 mrem [0.00021 mSv] EDE from diffuse and fugitive sources), which is 0.39% of the 10 mrem/yr dose standard. Therefore, for 2005, the Hanford Site was in compliance with the standard.

3.3.2 Washington Administrative Code 246-247 Regulatory Standard

For Hanford Site radionuclide air emissions, Washington state has adopted the federal dose standard of 10 mrem/yr EDE. The state requires that the dose to the MEI also include those doses attributable to diffuse and fugitive emissions, radon, and to nonroutine operations (refer to Section 3.5). Sampling data from the Byers Landing monitoring station were selected for the diffuse and fugitive dose calculation because that station is closest to Sagemoor Road, the location of the Hanford Site MEI for 2005. No known emissions from nonroutine operations occurred in 2005. Thus, the total dose to the MEI in 2005 at the Sagemoor Road location from all Hanford Site radionuclide emissions was 0.039 mrem (0.00039 mSv) EDE. This total dose is the sum of doses from Hanford Site point sources (i.e., 0.018 mrem [0.00018 mSv] EDE) and diffuse and fugitive sources (i.e., 0.021 mrem [0.00021 mSv] EDE). The doses from the calculated (not actually measured) release of two radon isotopes is shown in Table 3-5.

Table 3-2. CAP88-PC Effective Dose Equivalent Estimates for the Maximally Exposed Individual at Sagemoor Road, Resulting from Hanford Site Point Source Radionuclide Air Emissions in 2005.

Distances, directions, and effective dose equivalent (mrem) to offsite MEI, by radionuclide and operational area ^a						EDE (40 CFR 61, Subpart H) by radionuclide	
Radionuclide	100 Area	200-E Area	200-W Area	300 Area	400 Area	EDE Total (mrem)	Percent of EDE Total
	41 km SE	28 km ESE	35 km ESE	1.5 km N	11 km NE		
³ H	0	0	0	1.7 E-02 ^b	0	1.7 E-02 ^b	97.1
⁹⁰ Sr ^c	4.2 E-07	6.7 E-07	4.8 E-07	1.1 E-06	0	2.7 E-06	0.015
¹²⁹ I	0	2.4 E-04	0	0	0	2.4 E-04	1.4
^{131m} Xe	0	0	0	1.2 E-12	0	1.2 E-12	<0.0001
¹³⁵ Xe	0	0	0	5.9 E-13	0	5.9 E-13	<0.0001
¹³⁵ Xe	0	0	0	2.2 E-12	0	2.2 E-12	<0.0001
¹³⁷ Cs/Ba	0	1.5 E-06	6.5 E-08	1.8 E-05 ^d	2.2 E-06 ^e	2.2 E-05	0.13
¹⁵⁵ Eu	0	0	5.9 E-11	0	0	5.9 E-11	<0.0001
²³⁸ Pu	1.5 E-06	6.3 E-08	1.9 E-06	0	0	3.5 E-06	0.020
^{239/240} Pu ^f	1.2 E-05	3.3 E-06	8.9 E-05	5.4 E-06	2.6 E-06	1.1 E-04	0.63
²⁴¹ Pu	2.1 E-06	0	1.3 E-06	0	0	3.4 E-06	0.019
²⁴¹ Am	2.2 E-05	7.2 E-06	2.3 E-05	5.9 E-05 ^g	0	1.1 E-04	0.63
Dose totals	3.8 E-05	2.5 E-04	1.2 E-04	1.7 E-02	4.8 E-06	1.8 E-02^h	▼
Percent of total dose	0.22	1.4	0.66	97.6	0.027	► Percent total: ≈100ⁱ	

^a 1 mrem = 0.01 mSv; 1 km = 0.621 mi.

^b HT is modeled as HTO in dose calculations.

^c This dose estimate includes gross beta data, assumed to be ⁹⁰Sr for dose calculations at all facilities other than FFTF.

^d This dose estimate includes results for unspecified gross beta activity emitted via stacks managed by PNNL.

^e This dose estimate derives from FFTF gross beta data, assumed to be ¹³⁷Cs in dose calculations.

^f These dose estimates include gross alpha data, assumed to be ^{239/240}Pu in dose calculations.

^g This dose estimate includes results for unspecified gross alpha activity emitted via stacks managed by PNNL.

^h The particulate radionuclide portion of the total point source dose is 2.5 E-04 mrem, or 1.5% of the total.

ⁱ Differences in totals are due to numerical rounding and the use of a dose-modeling spreadsheet that calculated radionuclide percentages to several decimal places before rounding to one or two significant figures following the decimal point.

Table 3-3. Doses from Hanford Site Major Point Sources that Operated in 2005.

Source identification (contractor)	Effective dose equivalent (mrem) ^a	Percent of dose total ^b
100-K West Area		
296-K-142 (FH)	7.9 E-09	<0.0001
200 East Area		
291-A-1 (FH)	2.4 E-04	1.4
296-A-42 (CH2M HILL)	0	NA
296-B-1 (FH)	6.8 E-10	<0.0001
296-B-10 (FH)	1.2 E-06	0.0069
296-H-212 (FH)	5.4 E-09	<0.0001
296-P-47 (CH2M HILL)	9.6 E-11	<0.0001
296-P-48 (CH2M HILL)	0	NA
200 West Area		
291-T-1 (FH)	4.2 E-06	0.024
296-P-43 (CH2M HILL)	0	NA
296-P-44 (CH2M HILL)	0	NA
296-S-21 (CH2M HILL)	1.8 E-07	0.0010
296-T-18 (CH2M HILL)	1.2 E-10	<0.0001
296-W-4 (FH)	7.9 E-09	<0.0001
291-Z-1 (FH)	1.1 E-04	0.63
296-Z-3 (FH)	1.3 E-07	0.00074
296-Z-7 (FH)	1.0 E-09	<0.0001
296-Z-14 (FH)	1.3 E-08	<0.0001
300 Area		
EP-324-01-S (FH and WCH)	3.3 E-07	0.0019
EP-325-01-S (PNNL)	1.7 E-02	97.1
EP-327-01-S (FH and WCH)	1.8 E-06	0.010
EP-331-01-V (PNNL)	3.6 E-06	0.021
Major point source totals ►	≈1.8 E-02	≈99.2

^a 1 mrem = 1.0 E-02 mSv

^b The dose total for all stacks is ≈1.8 E-02 mrem. Of that total, the portion from minor stacks is ≈1.2 E-04 mrem, or ≈0.69%. Slightly varying totals are due to numerical rounding.

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2005.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
1	EP-325-01-S	Major	PNNL	300	1.7 E-02	97.1
2	291-A-1	Major	FH	200 East	2.4 E-04	1.4
3	291-Z-1	Major	FH	200 West	1.1 E-04	0.63
4	EP-326-01-S	minor	PNNL	300	5.4 E-05	0.31
5	FFTF-CB-EX	minor	FH	400	1.9 E-05	0.11
5	105-KW Basin	minor	FH	100-K	1.9 E-05	0.11
5	105-KE Basin	minor	FH	100-K	1.9 E-05	0.11
8	EP-320-01-S	minor	PNNL	300	6.5 E-06	0.037
9	EP-323-01-S	minor	PNNL	300	5.0 E-06	0.029
10	296-B-10	Major	FH	200 East	4.2 E-06	0.024
10	291-T-1	Major	FH	200 West	4.2 E-06	0.024
12	340-DECON	minor	FH	300	4.1 E-06	0.024
13	EP-329-01-S	minor	PNNL	300	3.9 E-06	0.022
14	EP-331-01-V	Major	PNNL	300	3.6 E-06	0.021
15	FFTF-RE-SB	minor	FH	400	3.3 E-06	0.019
16	EP-327-01-S	Major	FH and WCH	300	1.8 E-06	0.010
17	EP-324-01-S	Major	FH and WCH	300	3.3 E-07	0.0019
18	FFTF-HT-TR	minor	FH	400	2.8 E-07	0.0016
19	291-S-1	minor	FH	200 West	2.7 E-07	0.0016
20	296-A-41	minor	CH2M HILL	200 East	2.4 E-07	0.0014
21	296-E-1	minor	FH	200 East	2.3 E-07	0.0013
21	296-A-30	minor	CH2M HILL	200 East	2.3 E-07	0.0013
23	437-MN&ST	minor	FH	400	2.1 E-07	0.0012
24	EP-320-02-S	minor	PNNL	300	1.8 E-07	0.0010
24	296-S-21	Major	CH2M HILL	200 West	1.8 E-07	0.0010
26	296-A-28	minor	CH2M HILL	200 East	1.7 E-07	0.0010
26	296-A-21	minor	CH2M HILL	200 East	1.7 E-07	0.0010
28	437-1-61	minor	FH	400	1.3 E-07	0.0007
28	296-Z-3	Major	FH	200 West	1.3 E-07	0.0007
30	EP-318-01-S	minor	PNNL	300	1.1 E-07	0.0006
30	291-U-1	minor	FH	200 West	1.1 E-07	0.0006
32	EP-3730-01-S	minor	PNNL	300	9.4 E-08	0.0005
33	296-S-18	minor	CH2M HILL	200 West	6.5 E-08	0.0004
34	RCF-2-EX	minor	BHI and WCH	300	5.7 E-08	0.0003
35	296-A-19	minor	CH2M HILL	200 East	3.8 E-08	0.0002
36	296-A-18	minor	CH2M HILL	200 East	3.2 E-08	0.0002
37	296-Z-14	Major	FH	200 West	1.3 E-08	0.0001
37	296-A-20	minor	CH2M HILL	200 East	1.3 E-08	0.0001
39	296-W-4	Major	FH	200 West	7.9 E-09	<0.0001

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2005.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
39	296-K-142	Major	FH	100-K	7.9 E-09	<0.0001
41	296-P-22	minor	CH2M HILL	200 West	7.0 E-09	<0.0001
41	107-N	minor	BHI and WCH	100-N	7.0 E-09	<0.0001
43	EP-327-02-V	minor	FH and WCH	300	6.8 E-09	<0.0001
44	296-Z-5	minor	FH	200 West	5.9 E-09	<0.0001
45	696-W-1	minor	FH	600	5.5 E-09	<0.0001
46	EP-320-04-S	minor	PNNL	300	5.4 E-09	<0.0001
47	296-H-212	Major	FH	200 East	5.4 E-09	<0.0001
47	EP-305B-01-S	minor	PNNL	300	4.2 E-09	<0.0001
49	296-A-29	minor	CH2M HILL	200 East	3.9 E-09	<0.0001
50	296-A-27	minor	CH2M HILL	200 East	3.8 E-09	<0.0001
51	296-Z-6	minor	FH	200 West	3.5 E-09	<0.0001
52	296-A-40	minor	CH2M HILL	200 East	3.3 E-09	<0.0001
53	296-A-26	minor	CH2M HILL	200 East	2.7 E-09	<0.0001
54	296-A-43	minor	CH2M HILL	200 East	2.4 E-09	<0.0001
55	296-P-31	minor	FH	200 East	2.0 E-09	<0.0001
56	296-T-7	minor	FH	200 West	1.7 E-09	<0.0001
57	696-W-2	minor	FH	600	1.2 E-09	<0.0001
58	296-A-22	minor	CH2M HILL	200 East	7.3 E-10	<0.0001
59	296-B-1	Major	FH	200 East	6.8 E-10	<0.0001
60	296-S-16	minor	CH2M HILL	200 West	4.2 E-10	<0.0001
61	1706-KE	minor	FH	100-K	1.4 E-10	<0.0001
62	296-S-25 & 296-P-23	minor	CH2M HILL	200 West	1.3 E-10	<0.0001
63	296-T-18	Major	CH2M HILL	200 West	1.2 E-10	<0.0001
64	296-P-47	Major	CH2M HILL	200 East	9.6 E-11	<0.0001
NA	296-A-42	Major	CH2M HILL	200 East	0	0
NA	296-P-43	Major	CH2M HILL	200 West	0	0
NA	296-P-44	Major	CH2M HILL	200 West	0	0
NA	296-P-48	Major	CH2M HILL	200 East	0	0
NA	296-Z-7	Major	FH	200 West	0	0
NA	296-Z-15	minor	FH	200 West	0	0
NA	340-NT-EX	minor	FH	300	0	0
NA	EP-306W-03-V	minor	PNNL and WCH	300	DNO	NA
NA	EP-320-03-S	minor	PNNL	300	DNO	NA
NA	296-A-10	minor	FH	200 East	DNO	NA
NA	296-C-5	Major	CH2M HILL	200 East	DNO	NA
NA	296-C-6	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-16	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-28	minor	CH2M HILL	200 West	DNO	NA
NA	296-P-32	Major	CH2M HILL	200 East	DNO	NA

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2005.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
NA	296-P-33	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-34	Major	CH2M HILL	200 East	DNO	NA
NA	296-S-15	minor	CH2M HILL	200 West	DNO	NA
NA	296-S-22	Major	CH2M HILL	200 West	DNO	NA
NA	296-T-17	minor	CH2M HILL	200 West	DNO	NA
NA	296-W-3	minor	CH2M HILL	200 West	DNO	NA
NA	340-B BLDG	minor	FH	300	DNO	NA
Totals^b ▶					≈1.8E-02	≈100

^a EDE = effective dose equivalent; 1 mrem = 1.0 E-02 mSv

^b Slight differences in totals due to rounding.

DNO = did not operate.

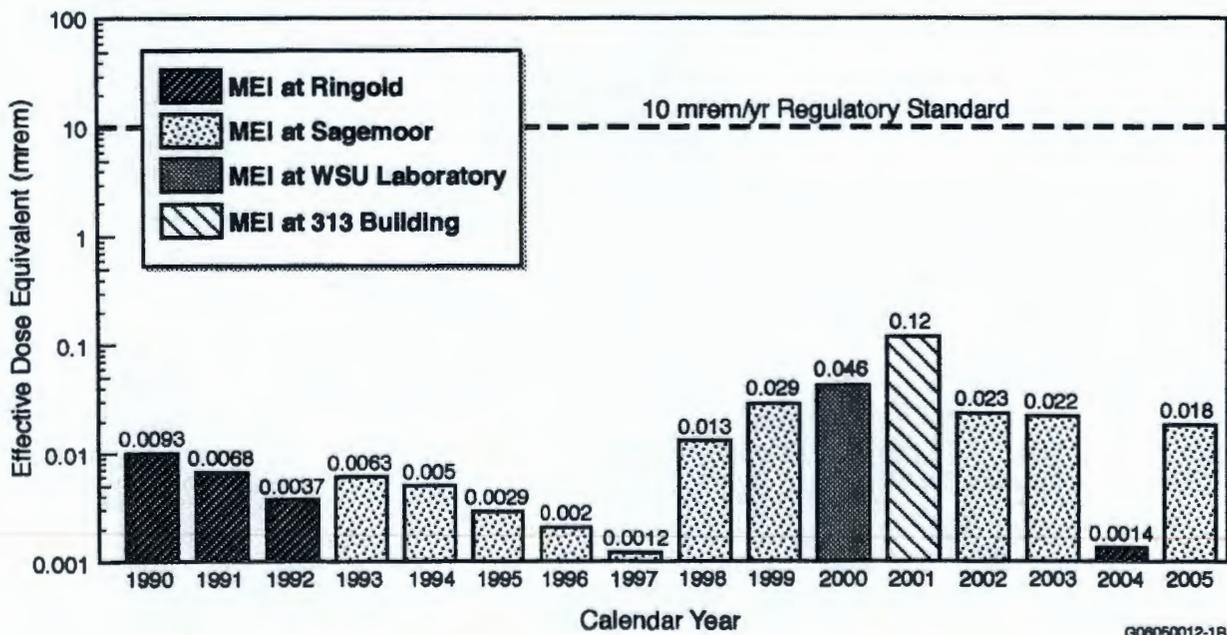


Figure 3-2. Doses to the MEI Due to Point Source Emissions of Radionuclides from the Hanford Site, 1990 through 2005.

3.4 METEOROLOGICAL DATA

Radionuclide air emissions disperse once they enter the atmosphere. Atmospheric dispersion models predict the degree of dilution and the magnitude of resulting air concentrations at downwind locations. Site-specific measurements of the occurrence frequencies for wind speed, wind direction, and atmospheric stability are used in the models. The dispersion models yield annual average dispersion factors, in units of seconds per cubic meter (s/m^3). Combining these factors with annual average release

rates yields predictions of average radionuclide air concentrations for the year. Annual average dispersion factors around the 100, 200, 300, and 400 Areas for 2005 are in Appendix A.

3.5 NONROUTINE RELEASES OF RADIONUCLIDES TO THE ATMOSPHERE

During calendar year 2005, no known nonroutine airborne releases of radionuclides occurred.

3.6 ADDITIONAL INFORMATION

3.6.1 Applicability of Stack Emissions Data to Air Operating Permit and Notices of Construction

The portions of the Hanford Site MEI dose attributable to individual point sources (i.e., stacks) as listed in Section 2.0 are appropriate for use in demonstrating the compliance of abated stack emissions with applicable terms of the Hanford Site Air Operating Permit and of Notices of Construction.

3.6.2 Construction Projects and Modifications Exempted from 40 CFR 61.96

No exemptions of the approval process under 40 CFR 61.96 were granted in 2005. In 1992, the EPA determined that some emission units at the Hanford Site were out of compliance with requirements in 40 CFR 61, Subpart H. As a result, a NESHAP Federal Facilities Compliance Agreement (FFCA) was made between RL and EPA Region 10. In 1994, EPA stated it would not grant any exemptions until all FFCA milestones were completed, which occurred by the end of 2005. Notwithstanding that achievement, extenuating circumstances involving the designation status of two stacks caused EPA to continue requiring its approval for all construction or modification projects with a radiological dose potential of less than 0.1 mrem EDE per year.

3.6.3 Radon-220 and Radon-222 Emissions

Radon-220 and Rn-222 were emitted from the 325 Building via its major stack, EP-325-01-S. Those releases and respective doses are shown in Table 3-5. The release values are bounding engineering estimates, not derived from actual sample measurements. Concerning compliance with the dose standard of Subpart H of 40 CFR 61, radon is exempted from consideration. It is reported here for informational purposes.

Table 3-5. Emissions of ^{220}Rn and ^{222}Rn from the 325 Building, 300 Area, in 2005.


Radionuclide	Emissions, Ci	EDE to MEI, ^a mrem
^{220}Rn	4.3 E+01	2.1 E-03
^{222}Rn	1.2 E+00	6.6 E-04

^a EDE = effective dose equivalent; MEI = maximally exposed individual, which in this case resides near Sagemoor Road, Franklin County, directly east of the 300 Area.


3.7 CERTIFICATION

This certification applies only to Sections 1.0, 2.0, and 3.0.

"I certify under penalty of law that I have personally examined and am familiar with the information submitted herein and, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. See, 18 U.S.C. 1001." [quoted from 40 CFR 61, Subpart H, 61.94(b)(9)]

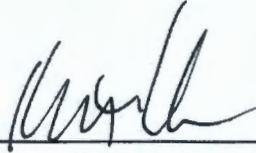

Keith A. Klein, Manager
U.S. Department of Energy
Richland Operations Office



Date

This page intentionally left blank.

4.0 DIFFUSE AND FUGITIVE SOURCES OF EMISSIONS

Diffuse and fugitive sources include all radioactive emission sources that are not actively ventilated or routinely sampled (e.g., passively ventilated tank vents, vented containers, outdoor surface contamination areas, cracks between cover blocks, etc.). Passively ventilated emissions are considered fugitive in nature because they lack a measurable flow. All diffuse and fugitive emission sources are monitored by the Hanford Site Surface Environmental Surveillance Program and the Near-Facility Monitoring Program, as described in Section 4.1. Numerous types of sources of diffuse and fugitive emissions are in and around Hanford Site facilities, as described in Section 4.3. That section also describes the monitoring program for diffuse and fugitive emissions and the estimated EDE to the public attributable to those emissions.

On December 15, 1989, NESHAP regulations were promulgated for radionuclides emitted from DOE facilities. Following that, DOE sites developed methods for estimating diffuse and fugitive emissions and resulting doses to members of the public. In accordance with a Memorandum of Understanding in 1995 between DOE and EPA (DOE, 1995), DOE facilities adopted the methods described therein to estimate their diffuse and fugitive emissions. EPA has for years accepted without comment the reporting of doses estimated for diffuse and fugitive emissions. By virtue of this, EPA has also accepted the dose-estimate methods as described in this section as appropriate for demonstrating compliance with the dose standard in 40 CFR Part 61, Subpart H.

WAC 246-247 requires facilities to monitor nonpoint (i.e., diffuse) and fugitive emissions of radioactive material. DOE Headquarters (DOE-HQ) has requested the reporting of estimated doses to the public originating from radioactive emissions both from point sources and from diffuse and fugitive sources. This request is based on the requirement in 40 CFR 61, Subpart H, that the dose from emission sources at DOE facilities not exceed 10 mrem/yr EDE to any member of the public. This section describes the diffuse and fugitive emissions monitoring program and also gives the EDE estimate to the public, attributable to diffuse and fugitive sources.


Currently, all nuclear material production facilities at the Hanford Site have been shut down or are in a surveillance-and-maintenance mode. Only waste minimization, stabilization processes, research activities, environmental remediation, and decontamination and decommissioning (D&D) continue. In the past, when the Hanford Site was operating at or near full capacity, point source emissions were easily detected. Now, however, emissions from point sources have diminished in most instances to background levels in the ambient environment. Therefore, the contribution from diffuse and fugitive emissions has become a larger percentage of total emissions from the Hanford Site, even though diffuse and fugitive emissions have remained relatively small and constant.

The standard approach for assessing offsite doses from forced ventilation exhaust points is by applying atmospheric transport models to measured releases. Assessing offsite doses from diffuse and fugitive emissions, however, is not as straightforward. It is complicated by the difficulties involved in quantifying the emissions from the source. Methods for quantifying diffuse and fugitive emissions are still being developed, an effort complicated by factors such as 1) difficulty in accurately quantifying air flow from the source, 2) greater complexity in the influences from meteorological conditions, and 3) low concentrations of radionuclides in ambient air.

Passively ventilated point sources, breather vents and other openings on tanks, vaults, vented containers, and other structures are potential conduits of radioactive emissions. Airborne radionuclides inside vented structures can be released through passive air exchanges, typically caused by ambient temperature and pressure changes. It is difficult, however, to accurately assess radionuclide releases that might occur under such conditions, particularly when a vent opening is irregularly shaped or when multiple openings

are in close proximity. This difficulty in accurately and readily quantifying passively ventilated emissions is the main reason why these sources are not routinely sampled. As an alternative to routine record sampling, estimates of radionuclides discharged as diffuse and fugitive emissions sources are made based on data collected from a comprehensive network of ambient air samplers. Dose estimates are then calculated using these data. Section 4.2 contains the dose and release estimates for Hanford Site diffuse and fugitive emissions in 2005.

For this report, doses have been calculated for emissions from both actively ventilated point sources and diffuse and fugitive sources. Dose calculations for each type of emission are presented separately. The older data displayed in Figure 4-1 sharply illustrates the impacts distant nuclear events in the world had on regional concentrations of airborne radioactivity, measured by the Hanford Site Surface Environmental Surveillance Program. The ambient air concentrations from sample locations at the Hanford Site perimeter are seen to differ little from concentrations measured at locations distant from the Hanford Site.

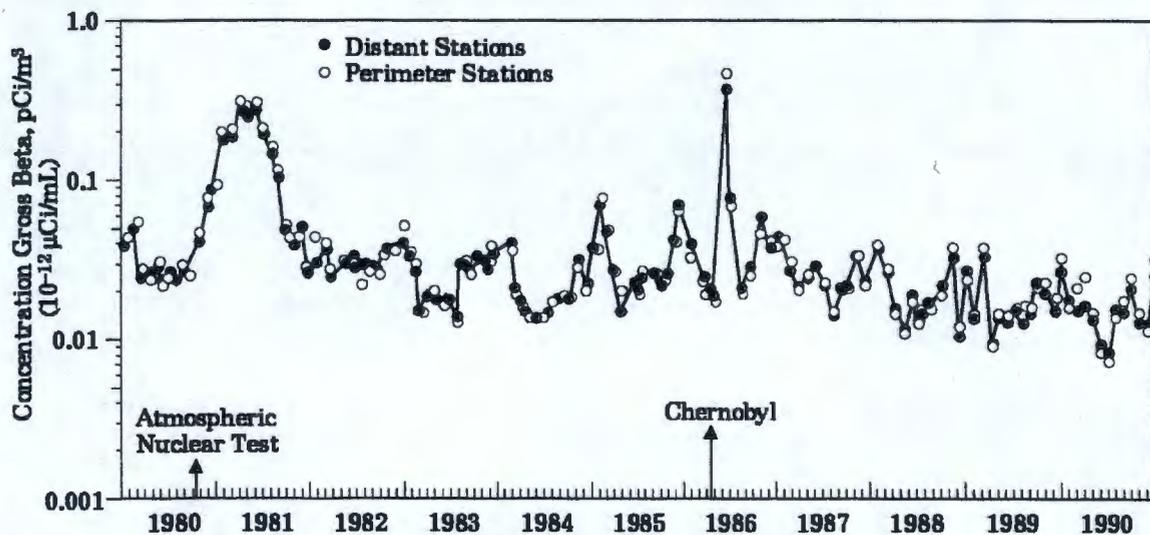

S9110121.1

Figure 4-1. Historical Impact on Gross Beta Radioactivity in Hanford Site Ambient Air Samples, 1979 through 1990 (PNL-7346).

4.1 DIFFUSE AND FUGITIVE EMISSIONS MONITORING

At the Hanford Site, two programs, the Near-Facility Environmental Monitoring Program and the Surface Environmental Surveillance Program, monitor diffuse and fugitive emissions. These two programs monitor locations on and off the Hanford Site and are designed to detect and quantify the amount of both radiological and nonradiological contaminants released to the environment. They also quantify the environmental and health significance of those contaminants. Monitoring program information on diffuse and fugitive emissions from which radionuclides may enter atmospheric pathways is presented in the remainder of this section.

4.1.1 Near-Facility Environmental Monitoring

Near-facility environmental monitoring is defined as monitoring done near facilities that have potentially dispersible radioactivity. Monitoring locations are associated mostly with major nuclear facilities and

waste storage or disposal facilities such as container storage, burial grounds, underground tanks (i.e., Tank Farms), ponds, cribs, trenches, and ditches.

Routine monitoring activities include the sampling and monitoring of ambient air, surface contamination, external radiation doses, soil, vegetation, and animals. Samples are collected from known or expected effluent transport pathways, which are generally downwind of potential or actual airborne releases and downgradient of liquid discharges. Ambient air sampling is the primary method used in monitoring diffuse and fugitive emissions, with other media samples possibly useful as secondary indicators.

In 2005, airborne radioactivity was sampled by a network of 88 ambient air samplers operating as continuously as possible at locations near facilities, as shown in the following list:

<u>Number of Samplers</u>	<u>Location</u>
5	100-B/C
2	100-D/DR Area
6	100-F Area
2	100-H Area
13	100-K Area
4	100-N Area
45	200 Areas
3	Environmental Restoration Disposal Facility
7	300 Area
1	Wye Barricade

The station at the Wye Barricade is collocated with samplers operated by the PNNL Surface Environmental Surveillance Project and WDOH. Three other stations, one each at 100-KE, ERDF, and C Tank Farms, in the 200-E Area, have WDOH samplers co-located with them. Additional samplers are also used to support specific environmental remediation tasks. Ambient air samplers are primarily located at or near (within about 1,600 ft [500 m]) sites and facilities having the potential for or history of environmental releases. Particulate air samples are analyzed for gross alpha activity, gross beta activity, gamma-emitting isotopes, ^{90}Sr , uranium isotopes (^{234}U , ^{235}U , and ^{238}U), plutonium isotopes (^{238}Pu and $^{239/240}\text{Pu}$). Gamma-emitting isotopes reported over the years include ^{60}Co , ^{106}Ru , ^{125}Sb , ^{134}Cs , ^{137}Cs , ^{154}Eu , ^{155}Eu , and any other detected isotopes. The 100-K Area and CSB air samples are also analyzed for ^{241}Am and ^{241}Pu . Figure 4-2 depicts the locations of the ambient air samplers used for near-facility monitoring. More detailed descriptions of these monitoring programs can be found in the *Hanford Site Environmental Report for Calendar Year 2005* (PNNL-15892) and the *Hanford Site Near-Facility Environmental Monitoring Data Report for Calendar Year 2005* (PNNL-15892, APP. 2).

4.1.2 Surface Environmental Surveillance

Surface environmental surveillance encompasses sampling and analyzing for radiological contaminants on and off the Hanford Site. Monitoring locations are divided among four surveillance zones on and off the Hanford Site.

The first surveillance zone extends from the near-facility monitoring locations to the Hanford Site perimeter. The second zone consists of a series of perimeter sampling stations near or just inside the Hanford Site boundary and along State Highway 240. The third zone consists of nearby community

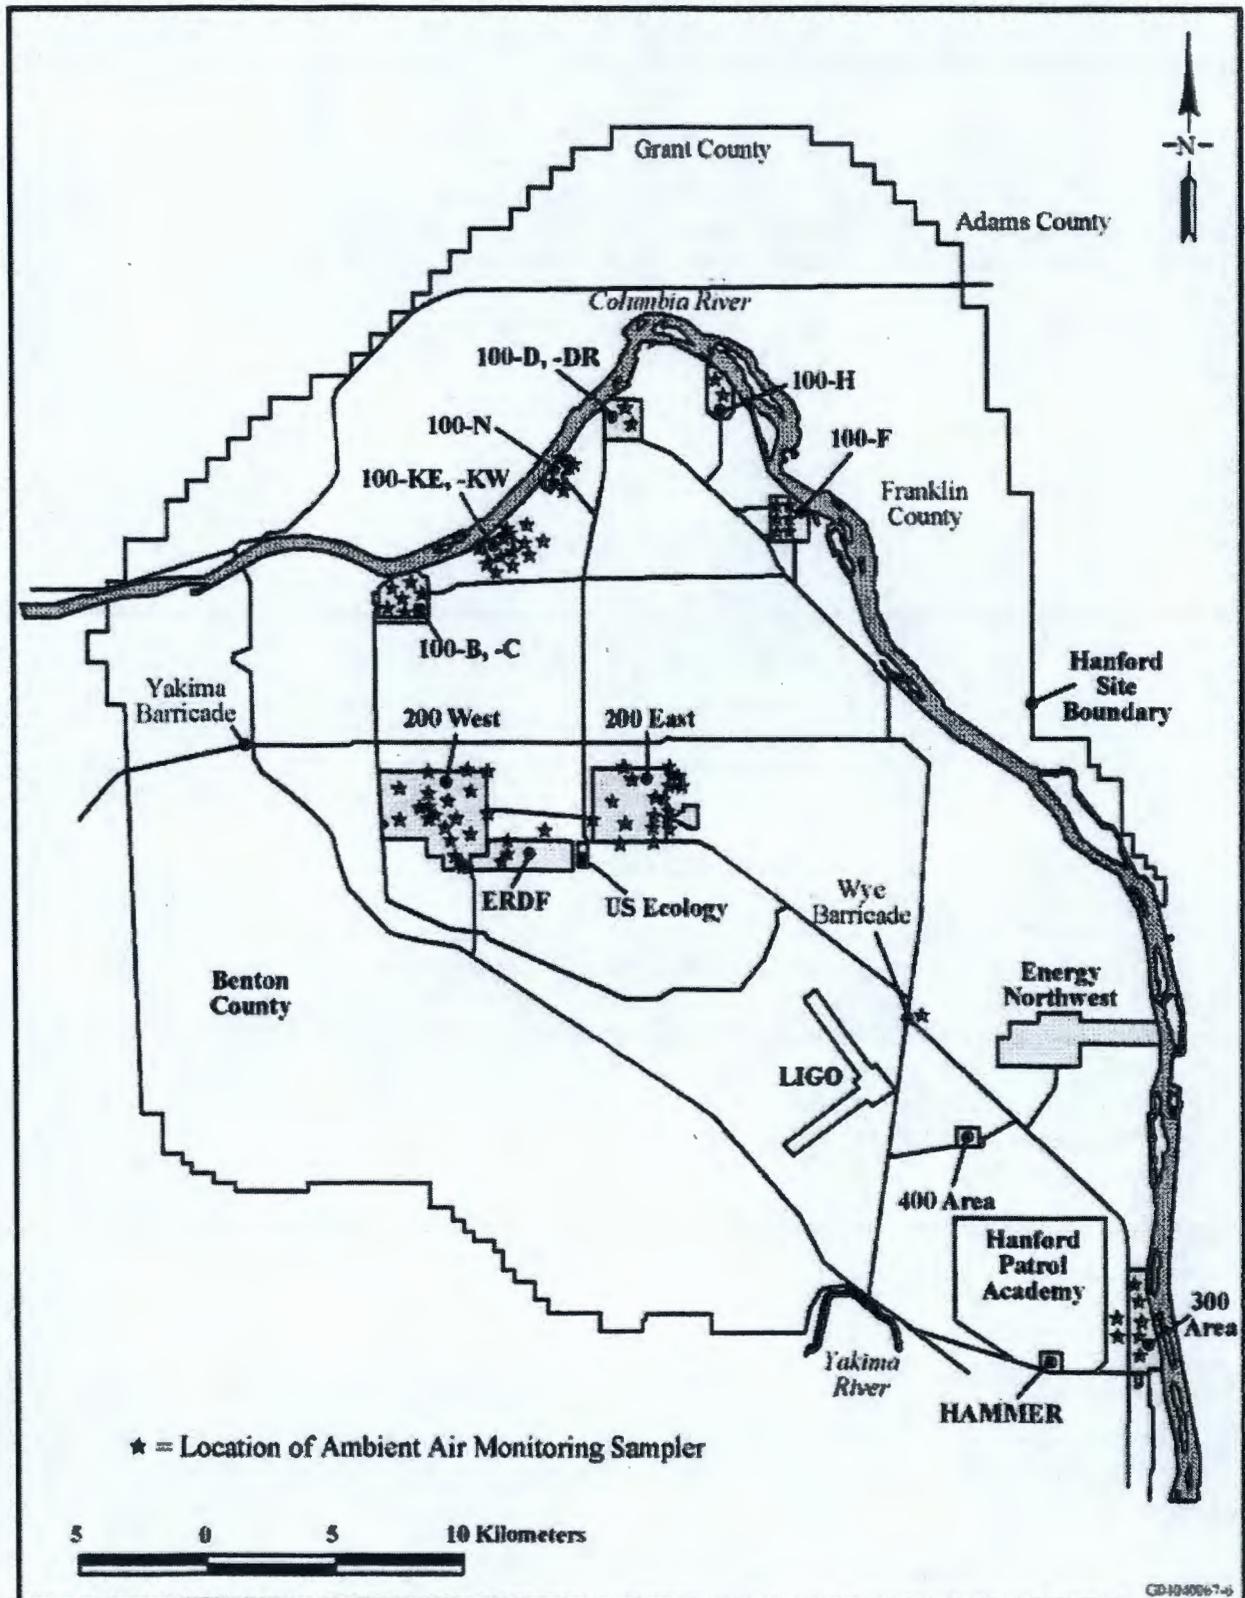


Figure 4-2. Near-Facility Ambient Air Sampling Locations.

sampling locations within a 50-mi (80-km) radius of the Hanford Site. The fourth zone (i.e., background locations) comprises distant community locations assumed to be unaffected by Hanford Site operations.

Routine surveillance activities include the sampling and monitoring of air, surface water, groundwater, food and farm products, fish and wildlife, soil and vegetation, and external radiation. Like the near-facility monitoring program, ambient air sampling is the primary method used in monitoring diffuse and fugitive emissions.

The air surveillance network consists of 44 sampling stations, of which 23 are onsite, 11 at the Hanford Site perimeter, 8 in nearby communities, and 2 in distant communities (considered as background locations). This program routinely monitors for radioactive vapors, gases, and aerosols. Water vapor, gas, and liquid aerosol sampling and analysis are performed for ^3H and ^{129}I , at selected locations.

Airborne particulate radionuclides at all sampling stations are sampled and analyzed. Particulate air samples are routinely analyzed for gross alpha activity, gross beta activity, gamma-emitting isotopes, ^{90}Sr , uranium isotopes (^{234}U , ^{235}U , and ^{238}U), and plutonium isotopes (^{238}Pu and $^{239/240}\text{Pu}$). Gamma-emitting isotope concentrations reported, if measured, are ^7Be , ^{40}K , ^{60}Co , ^{106}Ru , ^{125}Sb , ^{134}Cs , ^{137}Cs , ^{154}Eu , and ^{155}Eu . Figure 4-3 depicts the locations of the ambient air samplers for the Surface Environmental Surveillance Project. A more detailed description of this program can be found in the *Hanford Site Environmental Report for Calendar Year 2005* (PNNL-15892).


4.2 ESTIMATED DOSES FROM DIFFUSE AND FUGITIVE EMISSIONS

The dose to an offsite member of the public and the releases from diffuse and fugitive sources were estimated using ambient air monitoring data from environmental surveillance air sampling locations along the Hanford Site perimeter. Data from 13 selected perimeter and nearby community locations (refer to Figure 4-3) were used to perform the assessment of the 2005 emissions.

4.2.1 Dose Assessment Method

The method currently used to estimate emissions from diffuse and fugitive sources at the Hanford Site, and the subsequent offsite dose, is based on measured ambient air concentrations at the site perimeter. Contributions from monitored stack emissions and background radioactivity are subtracted from ambient air concentrations; if the difference is positive, the result is attributed to diffuse and fugitive sources. Then, from the adjusted ambient air concentrations, CAP88-PC is used to back-calculate diffuse and fugitive releases in curies, assumed to emanate from a central location in the 200 Area. Even though this is an indirect method for estimating emissions, it is subject to less uncertainty in estimating dose to a member of the public because it uses actual monitoring data from the site perimeter where members of the public could be located. This method is also much more cost effective in estimating the dose to a member of the public compared to estimating resuspension or emissions from over 1,000 potential sources of diffuse and fugitive emissions at the Hanford Site.

Emissions from diffuse and fugitive sources are estimated from environmental surveillance ambient air monitoring data collected at the Hanford Site perimeter. This method is preferred for two reasons: 1) these data most accurately represent the actual exposures of an offsite individual to airborne radioactivity and 2) there is currently insufficient information concerning the extent and characteristics of onsite soil contamination to use radionuclide resuspension estimates in conjunction with transport and dose modeling for many potential sources of diffuse and fugitive emissions. The ambient air sampling

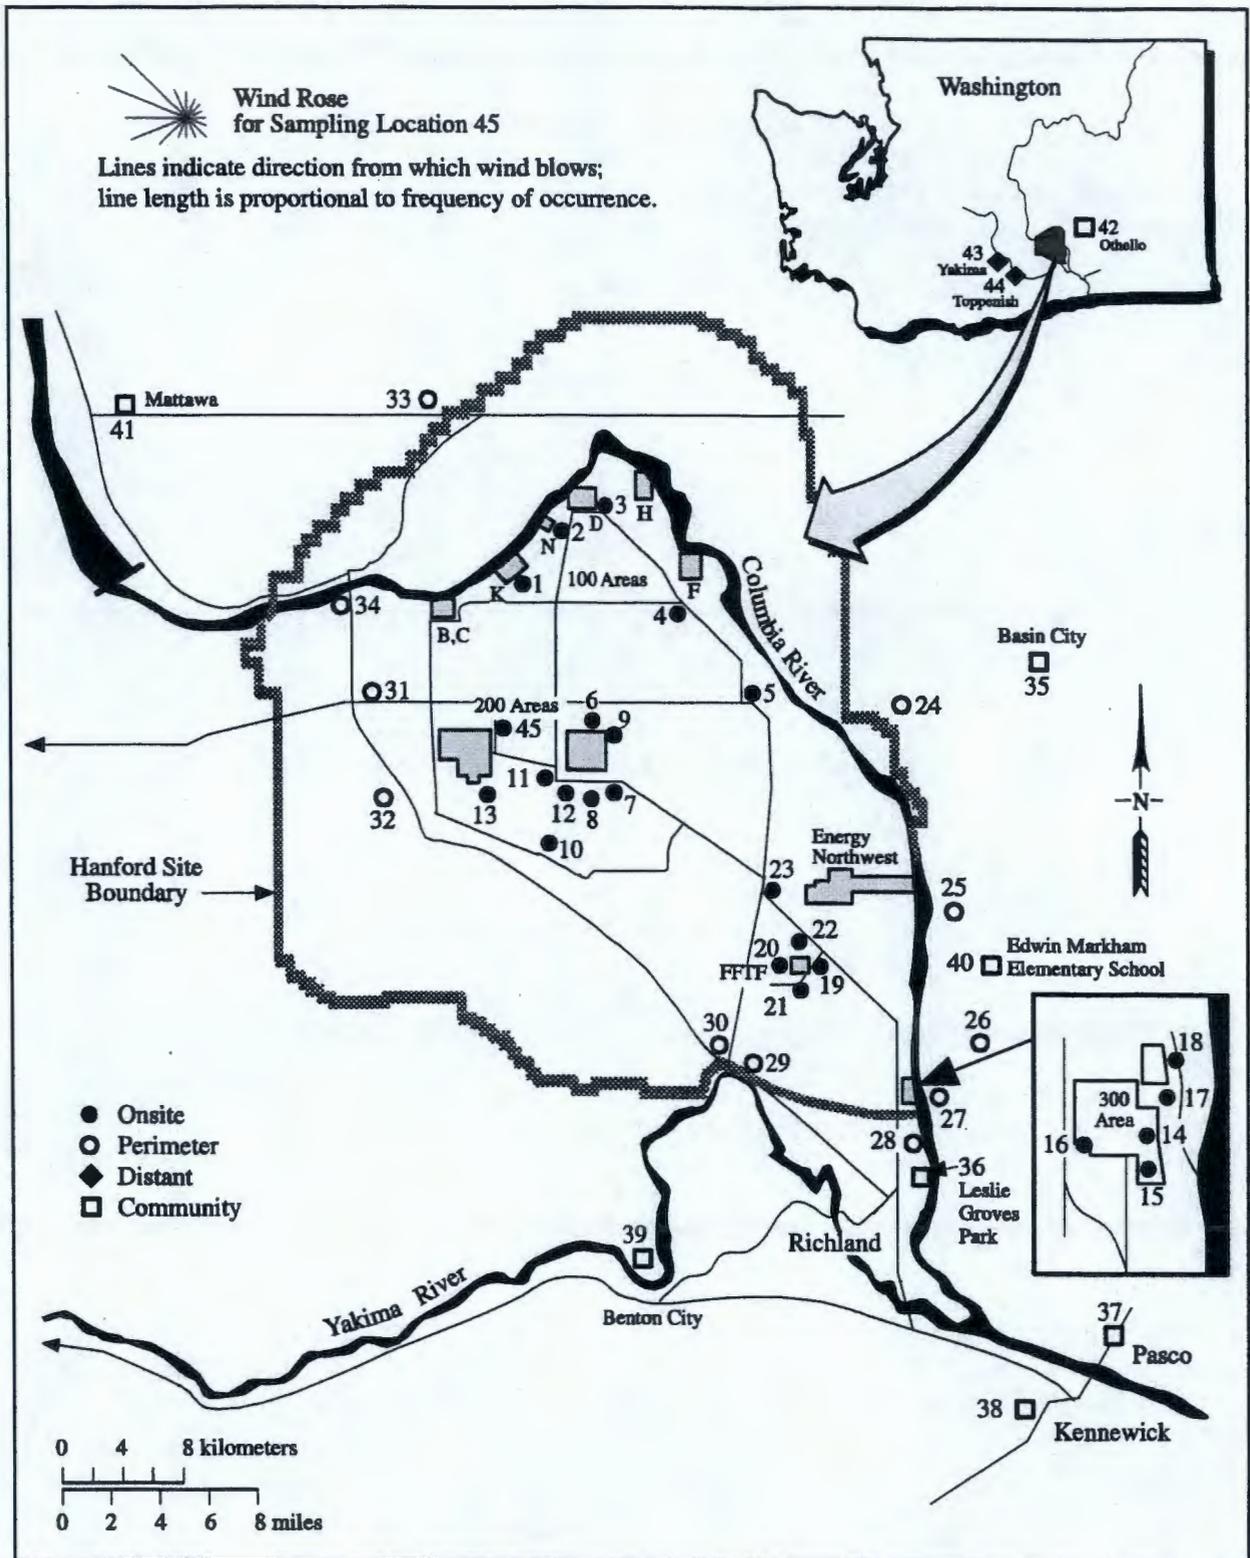

G06020023.1

Figure 4-3. Environmental Surveillance Ambient Air Sampling Locations.

results consisted of measured air concentrations for radionuclides that could be released from Hanford Site operations and diffuse and fugitive sources. Radionuclides routinely assayed in ambient air samples include ^3H , ^{60}Co , ^{90}Sr , ^{106}Ru , ^{125}Sb , ^{129}I , ^{134}Cs , ^{137}Cs , ^{154}Eu , ^{155}Eu , ^{234}U , ^{235}U , ^{238}U , ^{238}Pu , and $^{239/240}\text{Pu}$ (*Hanford Site Environmental Report for Calendar Year 2005* [PNNL-15892]).

Using the CAP88-PC atmospheric dispersion modeling code, radionuclide air concentrations resulting from monitored stack emissions at Hanford Site facilities and other nearby non-DOE sources were calculated for each of 13 selected perimeter and nearby community sampling locations. Airborne radionuclide concentrations attributable to the stack emissions were subtracted from the ambient monitoring results. Averaged regional background concentrations for each radionuclide were calculated from the air sample results obtained at distant community sampling stations located outside the 80-km (50-mile) radius from Hanford Site sources. The average background concentration at those stations was also subtracted from the ambient monitoring results at the Hanford Site perimeter stations. The net air concentrations at the site perimeter, adjusted to account for monitored emission sources and background concentrations, are assumed to be emissions from diffuse and fugitive sources.

Emissions from diffuse and fugitive sources are estimated using the net perimeter air concentrations attributable to diffuse and fugitive emissions and by performing a back-calculation using CAP88-PC. The 200 West Area near the center of the Hanford Site is assumed to be the source of all diffuse and fugitive emissions. This assumption results in a conservatively high aggregate release estimate and dose from all diffuse and fugitive sources. The average aggregate emissions from diffuse and fugitive sources are then used to estimate dose at the Hanford Site perimeter with the CAP88-PC code. The Hanford Site air emissions report contains results for the perimeter location having the highest dose, as well as the dose at the location of the maximally exposed member of the public from monitored stack sources. The maximum combined dose to a member of the public from monitored stack emissions and estimated diffuse and fugitive source emissions is reported to demonstrate compliance with the 10 mrem/year standard in 40 CFR Part 61, Subpart H.

4.2.2 Results of Dose Assessment

During 2005, the measured annual average ambient air concentrations at the perimeter and nearby community sampling locations were found to be greater than the combined contributions from stack releases and background for the following analytes: ^3H , ^{60}Co , ^{235}U , and ^{238}Pu . In other words, calculating the net diffuse and fugitive radionuclide air concentrations for these isotopes resulted in positive values. Calculating the net diffuse and fugitive radionuclide air concentrations for all other isotopes resulted in negative values. All the net air concentrations, both positive and negative, were used when back-calculating diffuse and fugitive releases from the 200 West Area in accordance with previous guidance from DOE-HQ.

Releases from diffuse and fugitive sources were estimated from the net air concentrations by performing a back-calculation using CAP88-PC. The 200 West Area was assumed to be the source of diffuse and fugitive emissions for all radionuclides, which results in the largest release estimate. The diffuse and fugitive source releases reported in Table 4-1 represent the average of the individual release estimates calculated from each of the perimeter and nearby community locations for each radionuclide. Note that not all radionuclides were evaluated at every sampling station; the estimated releases for any particular radionuclide are based on those stations where samples were analyzed for that radionuclide.

Where the resulting release estimate reported in Table 4-1 for an individual radionuclide is less than zero, the average of the air concentrations at the perimeter stations was smaller than the combined concentrations expected as a result of stack emissions and regional background. In such cases, it is

unlikely that diffuse and fugitive sources contributed significantly to the offsite measured air concentrations for those radionuclides.

The estimated diffuse or fugitive releases for the sampled radionuclides were also used to calculate the dose at the perimeter sampling stations. An individual at the Yakima Barricade sampling station, which is within the Hanford Site boundary, had the highest estimated dose. The Byers Landing station was closest in distance to the MEI for monitored point sources at the Hanford Site. Table 4-1 shows the hypothetical mean dose for 2005 to an individual at Sagemoor Road and to an individual at the Yakima Barricade to be, respectively, 0.021 mrem (0.00021 mSv) EDE and 0.041 mrem (0.00041 mSv) EDE. The doses at the other sampling stations are not shown in Table 4-1, but were lower than those at the Yakima Barricade location.

Table 4-1. Estimated Hanford Site Diffuse and Fugitive Emissions and Resulting Effective Dose Equivalents for 2005^a

Radionuclide	Estimated diffuse and fugitive emissions from 200 Areas (Ci) ^b	Location	
		Estimated dose to MEI at Sagemoor (mrem) ^c	Estimated dose at Prosser Barricade (mrem) ^d
³ H	4.3 E+02	4.0 E-03	6.3 E-03
⁶⁰ Co	3.9 E-02	2.3 E-03	4.9 E-03
⁹⁰ Sr	-7.4 E-02	0	0
¹³⁷ Cs/ ^{137m} Ba	-2.0 E-02	0	0
¹²⁹ I	-2.2 E+00	0	0
²³⁴ U	-2.5 E-03	0	0
²³⁵ U	2.0 E-02	1.3 E-02	2.6 E-02
²³⁸ U	-1.5 E-02	0	0
²³⁸ Pu	9.4 E-04	1.8 E-03	3.8 E-03
²³⁹ Pu	-4.7 E-04	0	0
Total ►		2.1 E-02	4.1 E-02

^a Hanford Site stack emissions, background radioactivity, and emissions from Pacific EcoSolutions, Areva (formerly Framatome ANP), and the Energy Northwest Columbia Generating Station have been subtracted from these diffuse and fugitive emissions estimates, which may contain releases from other non-DOE nuclear facilities. Negative values for releases of a radionuclide indicate that air concentrations at the site perimeter are lower than the combined air concentrations expected from natural background and monitored stack releases.

^b 1 Ci = 3.7 E+10 Bq. Emissions from diffuse and fugitive sources are assumed to originate in the Hanford Site 200 Areas and have a release height of 1 m. The 300 Area also has potential sources for the resuspension of uranium from soil, along with naturally occurring uranium isotopes found throughout the area. Uranium releases were modeled as if the total inventory were from the 200 Areas, because it was not possible to determine the source of uranium isotopes detected at offsite sample stations.

^c 1 mrem = 1.0 E-02 mSv; these doses are based on air monitoring results for sample stations at the site perimeter. Radionuclides with negative releases are assumed to have a zero dose.

^d The highest estimated dose from diffuse and fugitive emissions was at the Yakima Barricade, a location with no full-time occupancy by a member of the public, which disqualifies it for consideration as a possible MEI location.

Where the release estimate for a particular radionuclide was less than zero, the dose estimate for that nuclide was set equal to zero before combining the contributions of all radionuclides to obtain the total dose at each location. For 2005, the estimated dose to the offsite Sagemoor Road MEI was 0.039 mrem (0.00039 mSv) EDE, which is significantly below the federal and state 10 mrem/yr standard. The MEI dose derived from 0.018 mrem (0.00018 mSv) EDE from point source emissions and 0.021 mrem (0.00021 mSv) EDE from diffuse and fugitive emissions. For purposes of comparison to the Sagemoor Road MEI dose, the MEI location in 2004 was at Ringold, where the dose was 0.032 mrem (0.00032 mSv) EDE, comprising 0.0014 mrem (1.4×10^{-5} mSv) EDE from point source emissions and 0.031 mrem (0.00031 mSv) EDE from diffuse and fugitive emissions.

In addition to the sitewide diffuse and fugitive emissions estimates, diffuse and fugitive tritium emissions from two sources during 2005 were estimated to determine their contribution to the public radiological dose. Tritium emissions from the 100-K Spent Fuel Storage Basins were estimated as less than 2 Ci/yr (7.4×10^{10} Bq/yr), and those from the 200 Area Tank Farms were estimated as less than 6 Ci/yr (2×10^{11} Bq/yr). Emissions from both sources were assumed to be in the form of tritiated water.

For 2005, the resulting dose to the offsite MEI from estimated tritium emissions was 1.1×10^{-5} mrem (1.1×10^{-7} mSv) EDE from the 100-K Basins and 5.8×10^{-5} mrem (5.8×10^{-7} mSv) EDE from the 200 Area Tank Farms. The dose from these sources was much lower than the dose from monitored point source emissions and did not substantially increase the total dose to an offsite receptor.

4.2.3 Estimate of Uncertainty in Dose Assessment

To estimate the uncertainty in the diffuse and fugitive emissions dose estimates, the reported air concentrations at the Byers Landing sampling station and at the distant community stations in 2005 were used to estimate the mean and 95% confidence intervals for each location. The analysis used the uncorrected air concentrations at the reference locations, including contributions from monitored point source releases at DOE facilities, diffuse and fugitive sources, sources other than DOE facilities, and regional background. The Byers Landing location was selected for this analysis because it was closest to the Hanford Site MEI and was the only perimeter station at which all radionuclides were evaluated.

The calculation was performed using the GENII-S computer code (SAND91-0561A) to produce a stochastic analysis of the environmental radiation doses. The raw values of the measured air concentrations were input as basic concentrations to define an empirical distribution for each radionuclide. The code used a Latin hypercube sampling routine to select random values for each radionuclide concentration in 300 trials to obtain the dose distribution for each location. The values of parameters other than the radionuclide air concentrations were not varied as part of this analysis; therefore, the uncertainties reported in this section reflect only variability in the air sampling data.

The estimated mean dose at the Byers Landing station was 0.035 mrem (3.5×10^{-4} mSv) for artificially produced radionuclides sampled at that location, with a 95% confidence interval of 0.0 to 0.078 mrem (0.0 to 7.8×10^{-4} mSv). The corresponding result for the distant community monitoring stations was 0.013 mrem (1.3×10^{-4} mSv) with 95% confidence limits of 0.0 to 0.036 mrem (0.0 to 3.6×10^{-4} mSv). The mean dose estimates and the upper 95% confidence limits were somewhat higher at the site perimeter than at the distant community stations. The estimated dose at perimeter stations was comparable to that calculated for diffuse and fugitive sources; therefore, the 95% confidence interval for the dose from diffuse and fugitive sources would be expected to be similar to the overall dose at those locations.

4.2.4 Discussion of Bias in Dose Assessment

It should be noted that the release estimates for diffuse and fugitive sources in Table 4-1 were obtained using CAP88-PC, which incorporates a continuous-release Gaussian-plume dispersion model. Releases from diffuse and fugitive sources would be expected to occur primarily under conditions that are very different from the annual average assumptions used by CAP88-PC. This is particularly true for resuspension of contaminated soil, and to some extent for emissions as a function of wind speed from sources such as evaporation ponds. Because release rates from such sources are greatest under conditions that favor atmospheric dispersion, use of an annual average continuous release model to back-calculate the release quantities might introduce a significant bias into these estimates. The dose estimates for sources of this type might also be affected by seasonal variation in the resuspension rates caused by the prevalence of strong winds during certain seasons of the year. If those seasonal episodes occur primarily during times when crop production is minimal, some of the exposure pathways incorporated into the CAP88-PC code (direct deposition on human and animal food crops, for example) would not be applicable. The release and dose estimates reported for diffuse and fugitive sources in this evaluation should therefore be viewed as approximations whose accuracy is limited by a number of factors inherent in the sampling and modeling process.

4.3 DIFFUSE AND FUGITIVE EMISSION SOURCES

The Hanford Site consists of 586 mi² (1,518 km²) of semiarid shrub-steppe land, of which approximately 6% (about 32 mi² [83 km²], or 20,000 acres [8,090 ha]) has been disturbed and/or actively used. This 6% of land is divided into large operational and support areas: the 100, 200 East, 200 West, 300, 400, and 600 Areas.

Almost all point, diffuse, and fugitive sources of radionuclide emissions are located in the five operational Areas or are modeled for those areas because of close proximity. Point source emissions are measured directly or calculated from process knowledge. Emissions from diffuse and fugitive sources are estimated using sample results from a network of environmental surveillance monitoring systems located along the Hanford Site perimeter and at several receptor locations.

The Hanford Site was acquired in 1943 and dedicated to producing plutonium for national defense and managing the resulting production wastes. Restoring the Hanford Site environment is the new mission that has largely supplanted the previous operational objectives. The environmental restoration effort will entail activities such as decontaminating and decommissioning over 100 facilities and cleaning up and restoring about 1,500 waste sites. Until the restoration and cleanup work is completed, radioactive emissions may be released from hundreds of diffuse and fugitive sources, in addition to known point source stacks.

Besides both measuring and modeling point source emissions to determine public doses, environmental surveillance is conducted. Environmental and food-chain pathways are monitored near facilities emitting radionuclides from either point sources or diffuse and fugitive sources.

The environmental pathways for all air emissions from the Hanford Site are monitored using a stratified sampling approach. Samples are collected and radiation measured according to four surveillance areas. These areas extend from main onsite operational areas to offsite regions (*Hanford Site Environmental Report for Calendar Year 2005* [(PNNL-15892)]).

The first area begins near the operating facilities and ends at the Hanford Site perimeter. Diffuse and fugitive emissions generally will be most concentrated and easier to detect in this area before diluting further as they drift offsite.

The second surveillance area is a series of sampling stations that surround the Hanford Site near its perimeter. Because a person could live as close to the Hanford Site as some of these stations, their data represent the maximum exposures for a member of the public. Therefore, ambient air sampling data from the perimeter locations most closely reflect the actual impacts of radionuclide air emissions from point sources and diffuse and fugitive sources at the Hanford Site.

The third surveillance area encompasses nearby and distant communities within a 50-mi (80-km) radius of the center of the Hanford Site but beyond its boundaries. Surveillance is conducted in communities to provide measurements at those locations where the most people are potentially exposed. This surveillance ensures radionuclide levels are well below standards established to protect the public health.

Finally, the fourth surveillance area comprises distant locations at which background concentrations are measured. These concentrations are compared with onsite, perimeter, and community locations to indicate the effects of Hanford Site activities. Background locations are essentially unaffected by Hanford Site emissions but contain similar levels of radioactivity originating naturally and from nuclear-testing fallout.

The goal of environmental surveillance at the Hanford Site is to verify compliance with DOE, EPA, and WDOH radiological dose standards for public protection. This goal is accomplished by measuring radionuclides and consequent exposure in the onsite and offsite environment. The environmental surveillance criteria are derived from 1) the collected environmental surveillance data on radionuclides and doses, 2) applicable regulations other than DOE Orders, 3) DOE Order 5400.5, and 4) the DOE *Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance* (DOE/EH-0173T). The surveillance program (*Hanford Site Environmental Surveillance Data Report for Calendar Year 2005* [(PNNL-15892, APP. 1)]) was established on these criteria and the pathway analyses that provide information on radionuclides and media contributing to human dose. Experience from Hanford Site environmental surveillance activities and studies conducted over the past 45 years has built an invaluable technical background of information for planning and data interpretation.

4.3.1 Description of Diffuse and Fugitive Emission Sources

The presently identified actual or potential sources of diffuse and fugitive radionuclide emissions to the environment at the Hanford Site are described in this section. Among the sources that could contribute diffuse and fugitive radionuclide emissions are several types of waste handling and disposal facilities, such as cribs, ponds, ditches, trenches, retention basins, valve pits, French drains, reverse wells, tanks, vented containers, and burial grounds. Over 1,200 of these types of sources are present, of which over 95% are inactive (DOE/RL-88-30). Operating facilities or facilities on standby or that are inactive also could contribute diffuse and fugitive emissions. Deactivation, decontamination, and decommissioning of facilities; characterization of waste sites and areas; and cleanup of inactive waste sites could also contribute diffuse and fugitive emissions. The general distinction between diffuse and fugitive emissions is that diffuse emissions emanate typically from open areas of surface contamination whereas fugitive emissions originate from enclosed sources such as buildings and tanks. Each site or facility usually has one or more unique features or characteristics that could contribute to the release of diffuse and fugitive emissions. Features could include passive vents, risers, equipment and personnel access doors, and exhausters. Characteristics could include an undetected leak, unburied waste, or an absence of intrusion

barriers. Rates of diffuse and fugitive emissions could be influenced by a variety of environmental conditions, such as: 1) changing atmospheric pressures, 2) wind speed, 3) erosion, 4) evaporation, 5) percolation, 6) biotic intrusion, or 7) wind-caused particle resuspension. Range fires present another cause of diffuse emissions, from the immediate smoke and resultant loss of vegetative cover.

The general types of sites and facilities and their potential primary sources of diffuse and fugitive emissions are briefly described in the following sections.

4.3.1.1 Crib

Low-level liquid waste was discharged to cribs, which are subsurface systems similar to sanitary drain fields that allow the liquid component of the waste to percolate into the soil. The natural properties of the soil are used to remove radioactive material from the effluent water through filtration, ion-exchange, and precipitation reactions.

Many cribs are vented to the atmosphere through vents and pipe risers. Some cribs, however, have had vents and pipe risers either blanked or removed. Those engineered structures promote the downward flow of liquids disposed of in cribs but also provide pathways to the surface and atmosphere. Secondary causes of diffuse emissions include erosion and uptake and intrusion by biota, followed by wind-caused particle resuspension.

4.3.1.2 Ditch

A ditch is an open, unlined excavation used for disposing of liquid effluents or transporting liquid effluents to ponds for disposal. Most ditches, however, have been filled with soil. Diffuse emissions from ditches occur primarily from wind-caused particle resuspension, vegetative uptake, biota intrusion, and erosion.

4.3.1.3 Trench

Early disposal practices included disposing of liquid effluents into unlined trenches and over time filling the structures with soil. These were mostly replaced by cribs such as the BC-cribs. Diffuse emissions from trenches are primarily caused by erosion, uptake and intrusion by biota, followed by wind-caused particle resuspension.

4.3.1.4 Retention Basin

Similar to trenches, retention basins generally were lined with concrete and used to hold liquid before routing it to ditches or ponds. Diffuse emissions from retention basins are caused primarily by wind-caused particle resuspension.

4.3.1.5 Diversion Box

A diversion box is usually an underground concrete structure formed around a junction of transfer lines carrying liquid effluent. When diversion boxes are accessed for operations or maintenance, radioactively contaminated material might be released in the form of diffuse emissions.

4.3.1.6 Valve Pit

A valve pit is similar in structure to a diversion box, but contains piping valves. When valve pits are accessed for maintenance or operations, radioactively contaminated material might be released in the form of diffuse emissions.

4.3.1.7 French Drain and Reverse Well

A French drain is a rock-filled encasement inserted in the ground. A reverse well is an ordinary well used for mixing liquid waste with groundwater. These subsurface systems disposed of potentially contaminated liquid waste by promoting percolation into the soil. The natural filtration properties of the soil removed radioactive material from effluent water. Diffuse emissions from French drains and reverse wells might occur through erosion or uptake and intrusion by biota, followed by wind-caused particle resuspension.

4.3.1.8 Tank

A tank generally is a large reinforced metal structure that receives liquid effluent for storage. Examples are double-shell tanks (DSTs) and single-shell tanks (SSTs). Pathways for fugitive emissions from tanks include passively ventilated point sources and inactive exhausters open to the atmosphere. Transport mechanisms for these emissions include deposition and subsequent particle resuspension.

4.3.1.9 Burial Ground

Burial grounds are trenches in which contaminated solid waste is buried. Waste packaging procedures and burial practices used depend on the type of waste. Diffuse emissions occur at burial grounds through direct release to the atmosphere before the waste is buried, but could occur after burial by way of erosion, vegetative uptake, biota intrusion, and wind-caused particle resuspension.

4.3.1.10 Deactivation, Decontamination, Decommissioning, and Demolition Activities

Deactivation, decontamination, decommissioning, and demolition activities are being conducted to minimize the potential release or spread of contamination from facilities and equipment. Deactivation activities are intended to remove facility systems and/or areas from operational service to make them ready for the facility transition phase in which facilities are either converted to another use or placed in a permanent shutdown condition. Activities could include removal of fuel; draining and/or de-energizing of systems; removal of accessible stored radioactive and hazardous material; and other actions that place the facility systems and/or areas in a safe and stable condition. Deactivation reduces the risk to the public and the environment until the ultimate disposition of each facility is decided and implemented, and allows the surveillance and maintenance program to be conducted more cost effectively.

Decontamination consists of either physically removing contaminants or fixing contaminants in place to prevent their mobility during demolition. Methods might include washing with water, scraping, sandblasting, or fixing the contamination in place by painting, applying asphalt, etc. Demolition involves destroying and removing the structure and might include excavating its foundation. In some cases, contaminated material might be exposed to the atmosphere, but proper planning and controls should minimize these exposures. Monitors around demolition sites are used to measure or indicate the effectiveness of controls.

4.3.1.11 Waste Site Characterization and Cleanup Activities

Characterization is performed to determine the extent of contamination. Cleanup activities are conducted to minimize the potential release or spread of contamination from inactive waste sites. Contaminated soils and structures are excavated and transported to ERDF for disposal. Contaminated materials are exposed to the atmosphere during excavation and disposal activities. Proper planning and controls such as water sprays and fixatives are used to minimize the potential for airborne emissions. The waste sites are backfilled after excavation and the disposed material is covered with soil.

4.3.1.12 Outdoor Radioactive Surface Contamination Areas

All of the following outdoor radioactive surface contamination areas are routinely surveyed: burial grounds, cribs, trenches, retention basins, and identified unplanned release sites. The surveys are performed at least annually, but more frequently when needed. The areal magnitude of outdoor surface contamination varies. The magnitude is not fixed because of continuing efforts to clean, stabilize, or remediate known contaminated areas while new areas of contamination are continuing to be identified. Newly identified contamination could result because of preexisting contamination having migrated, by way of wind or biological intrusion, to previously uncontaminated areas or because the radiological screening criteria have become more stringent.

Contaminated areas are posted as Radiologically Controlled Area, Soil Contamination Area, or Underground Radioactive Material Area. Radiologically controlled areas are areas having a potential for an individual to receive an annual dose of up to 100 mrem. Soil contamination areas have more widespread contamination, and can have a potential for an individual to receive an annual dose of more than 100 mrem. Underground Radioactive Material Area signs mark cribs, burial grounds, covered trenches, and ponds, but not underground plumes that extend away from these sites. If an area has soil contamination and underground contamination, such as a surface contaminated crib, both postings will be used. The general location, by area, and the approximate area of soil contamination and underground contamination are shown in Table 4-2. Diffuse emissions from areas of soil contamination are primarily caused by erosion, plant uptake, biota intrusion, and wind-caused particle resuspension.

4.3.1.13 Structures with Radioactive Contamination

Structures having indoor contamination and not actively ventilated through a point source are sources for fugitive emissions. Many structures control fugitive emissions with ventilation systems and contamination control practices. Ventilation systems help maintain a negative indoor air pressure, preventing airborne contaminants from leaving the building. The structures with ventilation systems discharge air to the atmosphere via an emission control device, typically a HEPA filter. Facilities having a potential to emit radioactive contaminants and that have routinely sampled actively ventilated and filtered point sources are not considered a source of fugitive emissions. This type of facility has the potential, though lesser in extent, than facilities not equipped with active ventilation systems but with a comparable source term. The Hanford Site has many old structures with radioactive contamination and no building ventilation. Contaminants can sometimes migrate outdoors via human entry and exit. Also, contaminants can migrate outdoors via passive ventilation or animal intrusion, because these structures often have cracks and gaps that serve as pathways to the outdoors. Once the contaminants are transported outdoors, they can become airborne by wind-caused resuspension.

4.3.2 Description of Specific Diffuse and Fugitive Emission Sources

This section contains brief descriptions of the identified sources of diffuse and fugitive emissions at the Hanford Site.

Table 4-2. Soil and Underground Contamination Areas at the Hanford Site in 2005.

Hanford Site operational area	Soil contamination areas, ^a acres (hectares)	Underground radioactive material areas, ^b acres (hectares)
100 Areas	25 (10)	426 (172)
200 Areas ^c	245 (99)	903 (366)
300 Area (north)	12 (5)	104 (42)
400 Area	0	0
600 Area ^d	8,594 (3,478)	136 (55)
Total	8,876 (3,592)	1,569 (635)

^a Includes areas posted as "Contamination/Soil Contamination" or as "Radiologically Controlled" and areas that had both radioactive material and contamination/soil contamination.

^b Includes areas with only underground contamination.

^c Includes Tank Farms.

^d Includes BC-controlled area, Environmental Restoration Disposal Facility, and waste disposal facilities outside the 200 East Area and 200 West Area boundaries.

4.3.2.1 100 Areas Inactive Reactor Sites

The inactive reactor sites in the 100 Areas include the 100-B/C Area, 100-D Area, 100-F Area, 100-H Area, 100-K Area, and 100-N Area. The reactors are currently under surveillance and maintenance until the long-term disposition of these reactors is determined. Activities were conducted at several of the reactors to demolish ancillary facilities and to place the reactors in interim safe storage (ISS) pending final disposition. The potential sources for fugitive emissions include personnel and equipment passing through access doors during surveillance and maintenance; inactive exhaust vents and risers; ISS activities; ancillary facility decontamination and demolition; remedial actions; and characterization activities. The N Springs (i.e., a stretch of Columbia River shoreline below the retired 1301-N Crib) remains a source of low-level contamination (primarily ⁹⁰Sr) that seeps into the Columbia River. Other means of diffuse emissions include erosion, uptake or intrusion of biota, and wind-caused resuspension.

4.3.2.2 100-K Area Basins

Two identical reactors are located in the 100-K Area, one reactor in the 100-KE Area and the other in the 100-KW Area. The reactors and their support facilities were constructed between 1952 and 1954, beginning service in 1955. The 100-KW Area reactor ceased operating in 1970 and the 100-KE reactor in 1971.

The fuel storage basins within the 105-KE and 105-KW Buildings were modified years ago to store N Reactor irradiated fuel. Storing of this fuel began in 1975 at the 105-KE Basin and in 1981 at the 105-KW Basin; fuel is still stored in both basins. In 1989, shipments of fuel from N Reactor to the Basins ceased. Fuel from the Basins is now being packaged into Multi-Pack Canister Overpacks (MCOs). The

MCOs are then shipped to CVDF where the fuel is dried. After that, the MCOs, containing the fuel, are shipped to CSB in the 200 East for storage.

The primary radionuclides that could be included in fugitive emissions from the 100-K Basins include ^3H , ^{90}Sr , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, ^{241}Pu , and ^{241}Am . The potential release points for fugitive emissions include personnel and equipment access doors, which are normally closed.

4.3.2.3 200 Area Facilities and Sites

Active and inactive facilities and sites in the 200 Areas are potential sources for diffuse and fugitive emissions. Activities in the facilities or on the sites include surveillance and maintenance, decontamination and decommissioning, and stabilization. Erosion, vegetative uptake, wind, and biota intrusion can also induce diffuse and fugitive emissions at these locations.

4.3.2.4 Plutonium-Uranium Extraction Facility

The PUREX Facility is located in the 200 East Area. The main building, 202-A, is a heavily shielded, reinforced concrete structure known as a canyon. This building contains the main equipment that was used in the PUREX process of chemically separating and purifying actinides from the irradiated nuclear fuel.

Radionuclides primarily associated with the PUREX Plant include ^{90}Sr , ^{106}Ru , ^{129}I , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, ^{241}Pu , and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.5 Uranium-Trioxide Plant

The UO_3 Plant, located in the 200 West Area, produced UO_3 powder by calcining uranyl nitrate solutions from the PUREX Plant. The UO_3 powder was loaded into hoppers for shipment offsite.

Uranium was formerly the potential primary source of radioactive fugitive emissions from the UO_3 Plant. Since the UO_3 Plant was deactivated, only small amounts of UO_3 remain, located primarily inside of equipment. The noble gases radon and thoron remain as the only source of fugitive emissions. Potential fugitive emission release points include access doors, all of which are restricted and controlled.

4.3.2.6 Reduction-Oxidation Plant

REDOX is also located in the 200 West Area. It used methyl isobutyl ketone as a solvent to remove both plutonium and uranium from dissolved fuel rods solutions.

Radionuclides primarily associated with REDOX include ^{90}Sr , ^{106}Ru , ^{129}I , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, ^{241}Pu , and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7 Plutonium Finishing Plant

PFP is located in the 200 West Area. It was designed to recover, stabilize, and store plutonium. Recovered plutonium nitrate and plutonium nitrate solutions received from the PUREX Plant were reduced to plutonium dioxide. The reduction process stabilized the plutonium into the state best suited for long-term storage. The current PFP mission does not include producing finished plutonium metal but

rather maintaining a safe and compliant facility, storing Special Nuclear Materials safely and securely, stabilizing nuclear materials for long-term storage, and clean-up activities.

Radionuclides primarily associated with PFP include $^{239/240}\text{Pu}$, ^{241}Pu , and ^{241}Am . Potential fugitive emission release points from PFP include access doors, passively ventilated waste drain line vents, and the inlet-exhaust ventilation system.

4.3.2.7.1 234-5Z Building

The 234-5Z Building is often referred to as PFP, Dash 5, or the 234-5 Building. The basement of the 234-5Z Building mostly consists of pipe tunnels carrying drain piping. The first floor houses the following: 1) two former plutonium processing lines (Remote Mechanical A and Remote Mechanical C Lines) and their control rooms, 2) stabilization and repackaging gloveboxes, 3) plutonium storage vaults, and 4) the plutonium nitrate feed load-in/load-out, blending, and storage facilities.

Radionuclides primarily associated with the 234-5Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive release points include access doors, passively ventilated waste drain line vents, and the inlet-exhaust ventilation system.

4.3.2.7.2 236-Z Building

The 236-Z Building, also called the Plutonium Reclamation Facility, is located south of the southeastern corner of the 234-5Z Building and connected to it by the 242-Z Building. The building air exhausts through the 291-Z-1 stack.

Radionuclides primarily associated with the 236-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7.3 232-Z Building

The 232-Z Building is the Waste Incinerator Facility, which was operated from the 1960s until 1972 when it was shut down. Partial decontamination and decommissioning activities were conducted in this building in 1984 and from 1993 to 1995. Air emissions are exhausted through the 296-Z-14 stack.

Radionuclides primarily associated with the 232-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and inlet-exhaust ventilation systems.

4.3.2.7.4 241-Z Building

The 241-Z Building is a reinforced concrete structure with a pre-engineered corrugated metal enclosure over the top that provides weather protection. The below-grade structure consists of five separate ventilated cells, each containing a stainless-steel tank of approximately 17,000-liter capacity. In addition, the second cell from the west end, the D-7 cell, houses a 700-liter overflow tank. These tanks have been used to accumulate the liquid waste generated during PFP complex operations. The waste is pH adjusted before being transferred to the DST System at Tank Farms. Waste is received through underground pipelines. The tanks and the vault portion of the 241-Z Building are ventilated by the 296-Z-3 stack.

Radionuclides primarily associated with the 241-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7.5 242-Z Building

The 242-Z Building houses abandoned waste treatment process equipment, once used to recover americium. This facility was permanently shut down after a process upset in 1976 spread contamination and caused irreparable equipment damage inside. The structural integrity of the facility was not compromised, however. The facility was decontaminated extensively before being placed in layaway pending decommissioning work. The 242-Z Building shares the main ventilation system of the 234-5Z and 236-Z Buildings, exhausting its building air through the 291-Z-1 Stack.

Radionuclides primarily associated with the 242-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7.6 243-Z Building

The 243-Z Building is the Low-Level Waste Treatment Facility, which receives very low-activity wastewater (VLA) from various PFP operations. The VLA is treated and then routed to the TEDF. Building air is exhausted through the 296-Z-15 Stack.

Radionuclides primarily associated with the 243-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7.7 2736-Z and 2736-ZA Buildings

The 2736-Z Building is the primary plutonium storage facility for special nuclear material. The 2736-ZA Building provides ventilation for the 2736-Z Building, emissions from which are exhausted through the 296-Z-6 Stack located on the roof of the 2736-ZA Building.

Radionuclides primarily associated with the 241-Z Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.7.8 2736-ZB Building

The 2736-ZB Building has a shipping area and receiving area that can both accommodate a maximum of 100 shipping containers, each of which is about the size of a 55-gal (210-L) drum. Adequate spacing is provided between containers to meet criticality prevention requirements, personnel exposure specifications, and corridor access standards to emergency staging areas. The two areas are separated by a wall. The capability to weld inner and outer cans has been added to this building. Exhaust associated with shipping and receiving activities and can-welding operations is ventilated through the 296-Z-5 stack. In addition, the capability to thermally stabilize plutonium-bearing materials in muffle furnaces and repackaging of materials has been added to this building, with associated emissions exhausted through the 296-Z-7 stack.

Radionuclides primarily associated with the 2736-ZB Building include $^{239/240}\text{Pu}$ and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.8 T Plant Complex

Originally, the T Plant Complex, then known just as T Plant, was a fuel separations facility using the bismuth-phosphate process. Now the complex is used for cleaning radioactively contaminated equipment and for storing, treating, sampling, and verifying waste.

The T Plant Complex is located in the 200 West Area. Buildings, structures, or special facilities in the Complex are the 221-T Building (Canyon, Head-End, and Railroad Tunnel); the 2706-T, 2706-TA, and 2706-TB Facilities; the 214-T Storage Building; storage modules; and outdoor treatment and storage pads. Other ancillary structures, buildings, and areas include the 271-T administration building, 291-T-1 stack, 221-TA Buildings, and 211-T Area.

Decontamination processes, storage, and treatment are conducted in the 221-T Building and 2706-T Facility and other locations within the T Plant Complex boundary. The 221-T Building Head-End is used for waste processing activities (e.g., treatment and storage). The 271-T Building and other support structures provide office space to staff supporting T Plant operations.

Radioactive decontamination, treatment, and storage activities are performed on the canyon deck, process cells, railroad tunnel, and head-end. The canyon area consists of 37 cells and one railroad tunnel door. The railroad tunnel, used for transporting equipment, waste, etc., into and out of the canyon, enters the plant at cell 2L. A motor-driven rolling steel door, provides railroad tunnel access. Primary radionuclides associated with T Plant include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.8.1 2706-T Facility

The 2706-T Facility is a ground-level structure constructed of prefabricated steel. Two openings on its west end are fitted with roll-up metal doors that allow access to the pit area. Treatment, storage, and low-level radioactive decontamination activities can be performed over this pit.

Radionuclides primarily associated with the 2706-T Facility include ^{90}Sr , ^{137}Cs , $^{239/240}\text{Pu}$, and ^{241}Am . Potential fugitive emission release points include access doors, the inlet-exhaust ventilation system, and an outdoor storage area.

4.3.2.8.2 221-T Building — Head-End Operations

The 221-T Building head-end consists of a canyon area extending from the basement floor to the roof. This canyon area has several deck levels and a parapet wall. Four floor levels adjacent to the canyon house include 1) an electrical switchgear room, 2) a chemistry laboratory, 3) office areas, 4) a change room, 5) a lunch room, 6) a control room, 7) an instrument shop, 8) a maintenance shop, and 9) storage areas.

Radionuclides primarily associated with 221-T Head-End Operations include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and inlet-exhaust ventilation system.

4.3.2.8.3 221-T Building — Pressurized-Water Reactor Fuel Assembly Storage

Canyon cell 2R was modified to include a fuel pool for storing 72 pressurized-water reactor (PWR) Core 2 blanket fuel assemblies, used in the Shippingport Reactor. By the end of September 2004, those fuel assemblies had all been removed from the pool and shipped to the Canister Storage Building (CSB).

The 221-T Building galleries are maintained at atmospheric pressure, while the 221-T Building canyon area is kept at a negative pressure. A primary design feature of these systems is to ensure that potentially contaminated canyon air is completely separate from the clean air in the 221-T Building galleries and the 271-T Building, which is the office space connected to the 221-T Building. In addition, the canyon ventilation system is operated at negative pressures with respect to the other systems.

The 271-T Building is adjacent to the 221-T Building. While most of this building is used for office space, portions are used by T Plant Complex Operations.

Radionuclides primarily associated with 221-T-PWR Fuel Assembly Storage include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.9 224-T Building

The 224-T Building was originally used to purify plutonium nitrate by the lanthanum fluoride process. After phase-out of the bismuth phosphate plants, the lanthanum fluoride process was no longer needed and the facility remained inactive until the early 1970s. At that time, the building was modified for storage of plutonium scrap in liquid and solid forms. In 1984, the mission of the building changed to housing the TRU waste storage and assay operation, in which TRU waste containers were nondestructively tested and stored for eventual shipment to the Waste Isolation Pilot Plant (aka WIPP), near Carlsbad, New Mexico. All stored TRU wastes were removed by September 1998, and nondestructive examination and nondestructive assay operations terminated. Currently, no waste is stored and no waste operations are performed at the 224-T Building.

The radionuclides primarily associated with 224-T is $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.10 B Plant Complex

Currently, the B Plant Complex is deactivated and all production activities have ceased. It was originally designed to chemically process spent nuclear fuels. Radiological containment and confinement features were incorporated in the various facilities and support systems to prevent exposure of plant personnel and the general public to excessive radiation. The plant was then modified to separate strontium and cesium from the fission product waste stream following plutonium and uranium recovery from irradiated reactor fuels in the PUREX Plant. The recovered purified and concentrated strontium and cesium solutions were then transferred to WESF for conversion to solid compounds, encapsulation, and interim storage. After strontium and cesium removal, the remaining waste was transferred from B Plant to the Tank Farms.

B Plant consists of the 221-B Processing Building and the 271-B Service and Office Building. The 221-B Process Building and its attached 271-B Service Building were constructed in 1943.

Radionuclides primarily associated with B Plant include ^{90}Sr and ^{137}Cs . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.11 Waste Encapsulation and Storage Facility

WESF, or the 225-B Building, is an operating facility used to ensure safe storage and management of the cesium and strontium capsules. Construction of WESF was completed in 1974.

Radionuclides primarily associated with WESF include ^{90}Sr and ^{137}Cs . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.12 200 Area Interim Storage Area (at CSB)

The 200 Area Interim Storage Area (ISA) is located adjacent to CSB. The ISA is designed to receive non-defense reactor spent nuclear fuel (SNF) from various locations at the Hanford Site for consolidated

interim storage. The SNF planned for relocating to the ISA is from the FFTF, the Neutron Radiography Facility, and light-water reactors, fuel from which has been transferred to USDOE for research. The ISA is periodically monitored by means of hand-held radiation-detection instruments used to check for the presence or absence of radiological contamination on smears and/or swipes taken on the outer surfaces of containers holding SNF.

4.3.2.13 222-S Laboratory Complex

The 222-S Laboratory Complex is located near the southeast corner of the 200 West Area. The facility is composed of the main laboratory complex (222-S) and a number of ancillary buildings and structures.

4.3.2.13.1 222-S Laboratory

The 222-S Laboratory is a two-story, aboveground building with a subterranean service level. This building is divided into laboratory support spaces, office spaces, a multi-curie wing, a hot cell addition, and supplemental service areas. The building is designed with its own waste disposal facility, decontamination facility, fire protection and alarm system, ventilation system, and radiation monitoring systems.

The 222-S Laboratory Annex houses the maintenance shop, instrument shop, and the counting room filter building.

Radionuclides primarily associated with the 222-S Laboratory include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.13.2 222-SA Laboratory

The 222-SA Laboratory is a five-wide modular building located southeast of the 222-S Laboratory. Part of this laboratory prepares nonradioactive standards for 222-S and other Hanford Site laboratories. The other section of the laboratory is used for cold-process development work and standards preparation. The 222-SA Laboratory only has the potential for nonradioactive fugitive emissions.

4.3.2.13.3 2716-S Storage Building

The 2716-S Storage Building, located south of the 222-S Laboratory, is partitioned off for the storage of acids and bases. It provides both long- and short-term storage capability for laboratory materials and contains no radioactive materials.

4.3.2.13.4 207-SL Retention Basin

The 207-SL Retention Basin acts as a temporary holding facility for nonradioactive, nonhazardous liquid effluents before they are transferred via a cross-site pipeline to the Treated Effluent Disposal Facility, located in the 200 East Area. Transfers are also done by means of tanker truck, which transports basin water to the Liquid Effluent Retention Facility if the wastewater does not meet TEDF acceptance criteria.

The basin is a covered, below-grade concrete structure, directly northeast of the 222-S Building. Two 25,000-gal (95,000-L) compartments allow batch collection, sampling, and discharge of the wastewater. Three 20,000-gal (75,708-L) storage tanks were added in 1994 to improve waste transfer and storage capabilities. Wastewater from the laboratory, normally free of radioactive and hazardous chemical contamination, is routed to the 207-SL Retention Basin. Nonradioactive, nonhazardous wastewater from the nearby package boiler is also discharged to the basin.

Radionuclides primarily associated with the 207-SL Retention Basin include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive release points include access doors and seams in the basin cover blocks.

4.3.2.13.5 219-S Waste Handling Facility

The 219-S Waste Handling Facility collects liquid waste generated by the 222-S Laboratory operations that is contaminated radioactively and/or with hazardous chemicals. Potential diffuse and fugitive release points include access doors in the enclosure facility over the vaults. This facility consists of two below-grade vaults (A and B, also called cells) containing three stainless-steel tanks, a Transite building, the pipe trench and operating gallery, and an attached concrete-walled sample gallery. Tanks TK-101 and TK-102 are in vault A and tanks TK-103 and TK-104 are in vault B. Tank TK-103 is no longer in service.

Radionuclides primarily associated with the 219-S Waste Handling Facility include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive release points include access doors and seams in the vault enclosure.

4.3.2.13.6 222-SB Filter Building

The 222-SB Filter Building, located south of the 222-S Building, houses 96 HEPA filters which provide final filtration for the 222-S Laboratory. Under normal operation of the ventilation system, three electrically powered fans exhaust air from the 222-S Laboratory. Exhaust air leaves the 222-S Building through the 296-S-21 stack. In the event one of the primary exhaust fans fails to operate, emergency diesel-powered ventilation is provided for and exhausted through the 222-SE Filter Building.

Radionuclides primarily associated with the 222-SB Filter Building include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.13.7 222-SC Filter Building

The 222-SC Filter Building, located north of the 222-S Laboratory, contains the second and third stage HEPA filtration for hot cells 1-A, 1-E-1, 1-E-2, 1-F, and 11-A-1 through 11-A-6. The hot cells in rooms 1-A, 1-E, 1-E, 1-F, and 11-A are serviced by the main building supply and exhaust ventilation. The 222-SC Filter Building houses five parallel pairs of HEPA filters, which provide filtration to hot cell exhaust air before it enters the main exhaust plenum and final filtering in the 222-SB Filter Building. A total of four stages of HEPA filtration are provided for the hot cell ventilation exhaust.

Radionuclides primarily associated with the 222-SC Filter Building include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.13.8 222-SE Filter Building

The 222-SE Filter Building, located south of the 222-S Building, houses 56 HEPA filters. This building provides redundant backup filtering capabilities for the 222-S Laboratory exhaust.

Radionuclides primarily associated with the 222-SE Filter Building include ^{90}Sr , ^{137}Cs , and $^{239/240}\text{Pu}$. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.13.9 218-W-7 Dry Waste Burial Vault

The 218-W-7 Dry Waste Burial Vault is located 40 ft (11.3 m) southeast of 222-S. This underground concrete vault was removed from service around 1960. It was used primarily for disposal of plutonium-contaminated dry-hood waste generated by the 222-S Laboratory. Access to the tank is through a locked hatchway.

The radionuclide primarily associated with the 218-W-7 Dry Waste Burial Vault is $^{239/240}\text{Pu}$. A locked access hatchway is the only potential release point for fugitive emissions.

4.3.2.14 Waste Verification and Sampling Facility

The Waste Verification and Sampling Facility (213-W Building) is located in the 200 West Area. The 213-W Building is adjacent to the 272-WA Building (the Operations Support Building) at the 218-W-5 Burial Grounds at the west end of the 200 West Area. The primary function or process associated with this facility is the verification of waste drums received from waste generators. Because of limited use, it was transferred to the 200 West Tank Farms in 1995.

Radionuclides primarily associated with the 213-W Building include low levels of ^{90}Sr and ^{137}Cs . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.15 Waste Receiving and Processing Facility

WRAP, initially constructed and operational in 1997, has expanded to a group of structures on the west side of the 200 West Area adjacent to CWC. It is used for examining, assaying, characterizing, and repackaging principally TRU waste destined for disposal at the Waste Isolation Pilot Plant in Carlsbad, New Mexico. The building consists of preinsulated, prefinished metal interlocking roof and sandwich wall panels. Some rooms in the building are dedicated to mechanical, electrical, heating, ventilating, and cooling systems, as well as to administrative areas.

4.3.2.16 Central Waste Complex

CWC is a group of structures located on the west side of the 200 West Area exclusion zone, consisting of the Flammable and Alkali Metal Waste Storage Modules; Waste Storage Buildings; Waste Storage Pad; outdoor storage areas; and Waste Receiving and Staging Area. The primary function or process associated with the CWC is the receipt and storage of radioactive and mixed waste. The CWC has the potential to generate radioactive and/or hazardous chemical emissions and radioactive and/or hazardous chemical liquid effluent.

Radionuclides associated with the CWC are from a wide group of mixed-fission, mixed-waste, and TRU radionuclides. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.16.1 Flammable and Alkali Metal Waste Storage Modules

The Flammable and Alkali Waste Storage Modules are pre-engineered structures. The size and weight of the storage modules vary, depending on the manufacturer. As a result, no set standard exists for every module. The front, back, and side walls of all of these modules are constructed of 10-gauge steel and coated inside with chemical-resistant epoxy paint or have a corrosion-resistant covering. All roofs are constructed of 12-gauge steel. All modules have a vented catch sump under their storage floors. Each sump has capacity of 400 to 2,000 gal (1,500 to 7,600 L). Water supply presently is not provided but

could be if necessary. Under no circumstances would water be provided to the Alkali Metal Waste Storage Modules.

4.3.2.16.2 2401-W Waste Storage Building

The 2401-W Waste Storage Building is a pre-engineered steel structure for housing dangerous, mixed, radioactive, and/or Toxic Substances Control Act (TSCA) waste. It is 50 ft (15.2 m) wide by 80 ft (24.4 m) long by 20 ft (6.1 m) high. It is maintained at atmospheric pressure, and heating and cooling are not required for its operations.

4.3.2.16.3 2402-W Buildings

The 2402-W Buildings are pre-engineered steel structures for housing dangerous, mixed, radioactive, and/or TSCA waste. They are 50 ft (15.2 m) wide by 80 ft (24.4 m) long by 20 ft (6.1 m) high. They are maintained at atmospheric pressure, and heating and cooling are not required for their operations.

4.3.2.16.4 2403-WA through 2403-WC Waste Storage Buildings

These buildings are pre-engineered steel structures for housing dangerous, mixed, radioactive, and/or TSCA waste. They are 170 ft (51.8 m) wide by 200 ft (61 m) long by 20 ft (6.1 m) high and are maintained at atmospheric pressure. Heating and cooling are not required for their operations.

4.3.2.16.5 2403-WD Waste Storage Building

This building is a pre-engineered steel structure for housing dangerous, mixed, radioactive, and/or TSCA waste. It is 170 ft (51.8 m) wide by 275 ft (99 m) long by 20 ft (6.1 m) high. It is maintained at atmospheric pressure, and heating and cooling are not required for its operations.

4.3.2.16.6 Waste Receiving and Staging Area

This area is an asphalt pad approximately 61 m long and 46 m wide, and is used for container handling and staging of waste destined for various storage buildings.

4.3.2.16.7 2404-W Waste Storage Buildings

The 2404-W Buildings are pre-engineered steel structure for housing dangerous, mixed, radioactive, and/or TSCA waste. They are 121.2 ft (37 m) wide by 180.4 ft (55 m) long by 20 ft (6.1 m) high and maintained at atmospheric pressure. Heating and cooling are not required.

4.3.2.16.8 Waste Storage Pad

The waste storage pad is approximately 90 ft (27.4 m) by 100 ft (30.5 m) with a 6 in. (15.2 cm) curb, contains an access ramp and rainwater collection-and-removal system.

4.3.2.17 Tank Farms

Liquid waste from chemical processing operations containing high concentrations of radionuclides is stored on an interim basis in underground tanks. The Hanford Site Tank Farms contain 177 tanks (149 SSTs and 28 DSTs) with capacities ranging from 50,000 to 1.2 million gal (190,000 to 4.5 million L). Since 1967, newly generated liquid waste has been stored in DSTs. The SSTs are no longer receiving waste.

The location of all the Tank Farms is the 200 East and 200 West Areas. Both DSTs and SSTs are present in these areas. Tank Farms in the 200 East Area include the A, AX, B, BX, BY, C (SSTs), AN, AZ, AY, AP, and AW (DSTs). Those in the 200 West Area are the S, SX, T, TX, TY, U (SSTs) and the SY (DST).

Hanford Site Tank Farms comprise transfer routes, diversion boxes, storage vaults, double-contained receiver tanks (DCRT), and evaporators.

A system of underground pipes is used to transfer wastes from the 200 West Area DSTs to the 200 East Area DSTs, as well as between the DSTs and from the DSTs to treatment and storage units in the 200 East Area. Underground and "at-grade" pipe systems are used to transfer waste from SSTs into the DSTs.

Radionuclides currently analyzed for in sampled emissions from the Tank Farms include ^{90}Sr , ^{125}Sb , ^{129}I , ^{137}Cs , $^{239/240}\text{Pu}$, and ^{241}Am . Diffuse and fugitive emission release locations may include vents, risers, access hole covers, inlet-exhaust ventilation systems, diversion boxes, transfer lines, and storage vaults.

4.3.2.17.1 Double-Shell Waste Tanks

The DSTs are of two distinctly different types. The first type has a capacity of 1 to 1.2 million gal (3.79 to 4.54 million L) and is used for long-term storage of high-activity mixed waste. Twenty-four 1.2-million-gal (4.5-million-L) DSTs and four 1.0-million-gal (3.8-million-L) DSTs have been built. For efficiency during construction and operation, these tanks were grouped into six Tank Farms.

The second type of DST is smaller, with storage capacities ranging from 800 to 45,000 gal (3,028 to 170,370 L). These tanks were used primarily for lag storage of waste before transfer to the larger tanks or to other facilities. These smaller tanks are called DCRTs.

The first type of DSTs was fabricated as three concentric tanks with an annular area between the inner primary steel tank and the outer secondary steel tank. A concrete tank encloses the secondary tank and the roof of the primary tank. A DST tank farm consists of 2 to 8 tanks. The second type of DSTs consists of a steel tank situated within a concrete vault. The vault also provides an annular-type space around the tank. Ancillary equipment also is present, such as transfer lines, valve pits, diversion boxes, and tank-farm piping. Fugitive emissions can occur from the ancillary equipment and if the powered ventilation is not operating from the DST primary tanks and annuli.

4.3.2.18 242-A Evaporator

The 242-A Evaporator complex is located in the 200 East Area. The 242-A Building contains the evaporator vessel and supporting process equipment. Separate ventilation systems are used for the evaporator vessel and the building. Radioactive emissions are monitored at the stack of each ventilation

Radionuclides currently analyzed for in sampled emissions from 242-A include ^{90}Sr , ^{129}I , ^{137}Cs , $^{239/240}\text{Pu}$, and ^{241}Am . Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.19 242-S Evaporator

The 242-S Evaporator, currently inactive, is located in the 200 West Area. It consists of an evaporator vessel, supporting process equipment, and control area. The building ventilation exhausts filtered

building air. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.20 242-T Evaporator

The 242-T Evaporator, currently inactive, is located in the 200 West Area. The 242-T Evaporator Facility is divided into a processing area and a control area. The process area includes the 242-T Building, the 242-TA Vault, and 242-TB Ventilation Building. The control area is contained in the metal building adjacent to the east wall of the 242-T Building. Potential fugitive emission release points include access doors and the inlet-exhaust ventilation system.

4.3.2.21 Grout Treatment Facility

GTF combined low-level radioactive liquid waste with a cement mixture that was pumped into disposal vaults. GTF was placed in cold standby in 1993.

Radioactive constituents primarily associated with GTF include ^{90}Sr , ^{137}Cs , and other low-level radioactive waste from the Tank Farms. Potential fugitive emission release modes include vents, risers, and the inlet-exhaust ventilation system.

4.3.2.22 Low-Level Burial Grounds and Environmental Restoration Disposal Facility

The LLBG is an active land-based unit consisting of eight burial grounds located in the 200 East and 200 West Areas. The 218-E-10 and 218-E-12B Burial Grounds are in the 200 East Area. The 218-W-3A, 218-W-3AE, 218-W-4B, 218-W-4C, 218-W-5, and 218-W-6 Burial Grounds are in the 200 West Area. The LLBG are of various sizes and depths of lined and unlined disposal trenches. The lined trenches have leachate collection and removal systems.

The following provides a brief description and identifies the generic types of waste disposed of in the LLBG. An electronic database is maintained that documents each waste receipt, type of waste and disposal location. Waste disposal in unlined trenches ceased in calendar year 2003. The only trenches that continue to receive waste are trench 94, used for defueled Naval reactor compartments, in burial ground 218-E-12B and mixed-waste trenches 31 and 34 in burial ground 218-W-5.

4.3.2.22.1 Burial Ground 218-W-3A

Burial Ground 218-W-3A is approximately 50 acres (20.4 hectares) in size and began receiving waste in 1970. Examples of waste received in this burial ground include ion-exchange resins, failed equipment, tanks, pumps, ovens, agitators, heaters, hoods, jumpers, vehicles, accessories, retrievable TRU waste, and post-August 19, 1987-RCRA and state-only designated mixed waste.

4.3.2.22.2 Burial Ground 218-W-3AE

The 218-W-3AE Burial Ground is approximately 49 acres (20 hectares) in size and began receiving waste in 1981. Examples of waste received in this burial ground include rags, paper, rubber gloves, disposable supplies, broken tools, and post-August 19, 1987-RCRA and state-only designated mixed waste.

4.3.2.22.3 Burial Ground 218-W-4B

The 218-W-4B Burial Ground is approximately 8.6 acres (3.5 hectares) in size and began receiving waste in 1968. Examples of waste received in this burial ground include rags, paper, rubber gloves, disposable supplies, broken tools, and retrievable TRU waste.

4.3.2.22.4 Burial Ground 218-W-4C

The 218-W-4C Burial Ground is approximately 49 acres (20 hectares) in size and began receiving waste in 1978. Examples of waste received in this burial ground include contaminated soil, decommissioned pumps, pressure vessels, post-August 19, 1987-RCRA and state-only designated waste, and retrievable TRU waste.

4.3.2.22.5 Burial Ground 218-W-5

The 218-W-5 Burial Ground is approximately 92 acres (37.2 hectares) in size and began receiving waste in 1986. Examples of waste placed in this burial ground include rags, paper, rubber gloves, disposable supplies, broken tools, and post-August 19, 1987-RCRA and state-only designated waste. It currently contains double-lined mixed-waste trenches (trenches 31 and 34). Trenches 31 and 34 also are designated for greater-than-90-day container storage. Waste to be placed in trenches 31 and 34 for storage purposes predominately will be macro-encapsulated long-length contaminated equipment and other containerized waste that has been treated to meet Land Disposal Restriction (LDR) requirements. Adjacent to the double-lined mixed-waste trenches are leachate collection tanks. Examples of waste to be placed in the double-lined mixed-waste trenches include mixed waste that has been treated to meet LDR requirements (including bulk waste), macro-encapsulated long-length contaminated equipment, etc.

4.3.2.22.6 Burial Ground 218-W-6

The 218-W-6 Burial Ground is approximately 40 acres (16 hectares) in size and has not received any waste.

4.3.2.22.7 Burial Ground 218-E-10

The 218-E-10 Burial Ground is approximately 89 acres (36 hectares) in size and began receiving waste in 1960. Examples of waste placed in the there are failed equipment, rags, paper, rubber gloves, disposable supplies, broken tools, and post-August 19, 1987-RCRA and state-only designated mixed waste.

4.3.2.22.8 Burial Ground 218-E-12B

Burial Ground 218-E-12B is approximately 168 acres (68 hectares) in size and began receiving wastes in 1967. Examples of waste placed in the burial ground include defueled reactor compartments (trench 94), low-level waste, and retrievable TRU waste.

4.3.2.22.9 Environmental Restoration Disposal Facility

ERDF opened in July 1996 and received waste from Environmental Restoration activities across the Hanford Site. The ERDF consists of cells equipped with a double liner and leachate collection and recovery system that meets the requirements for hazardous waste landfills under RCRA. The ERDF is authorized under a CERCLA record of decision and can only receive waste from CERCLA actions conducted on the Hanford Site. An interim cover of soil is placed over the cells until the final closure cover is constructed.

4.3.2.23 340 Complex

The 340 Complex is located in the 300 Area near the Columbia River. The 340 Complex was constructed primarily to collect, store, and transport radioactive liquid wastes from 300 Area facilities. Waste was sent from the 324, 325, 326, 327, and 329 Buildings to the Radioactive Liquid Waste System until its valves were closed and most lines cut and capped at their sources. Direct shipments of containers or tankers were also received at the 340 Facility and added to the vault tanks. The 340 Complex also includes the 300 Area Retention Process Sewer, which collects process wastewater with the potential to become radioactively contaminated. This waste stream is monitored for radioactive materials and then accumulated in the 307 Basins before being transferred to the 300 Area Treated Effluent Disposal Facility (TEDF) for treatment.

Uranium, ^{60}Co , ^{90}Sr , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, and ^{241}Am are the most significant radionuclides potentially present at the 340 Complex. Potential fugitive emission release points include access doors, the inlet-exhaust ventilation system, and the 307 Retention Basin.

4.3.2.23.1 340-A Building

The 340-A Building houses six aboveground storage tanks, which provided temporary storage of radioactive liquid waste. The 340-NT-EX Stack powered exhaust system provides airborne ventilation to the now empty storage tanks, and the 340-A Building air is passively ventilated to the atmosphere via a roof air vent.

Smearable radiological contamination resulting from leakage of radioactive liquid waste from the storage tanks has been detected in the 340-A Building. The radionuclides with the most significant dose impact include ^{90}Sr , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, and ^{241}Am , which could potentially be present in fugitive emissions from the facility.

4.3.2.23.2 340-B East Building

The 340-B East Building served as a railroad car load-out facility. This facility housed railroad cars during the transfer of radioactive liquid wastes from the 340 vault tanks.

The 340-B East Building exhaust system is currently not operated, thus the building is not maintained at negative pressure. Consequently, fugitive emissions can potentially occur. Potential diffuse and fugitive emission release points at the 340-B East Building include personnel and equipment access doors. The radionuclides with the largest dose impact that potentially could be released as fugitive emissions include ^{90}Sr , ^{137}Cs , ^{238}Pu , $^{239/240}\text{Pu}$, and ^{241}Am .

4.3.2.23.3 Retention Process Sewer

The Retention Process Sewer consists of a plumbing system, a liquid waste retention/storage system, and a monitoring system. The plumbing system consists of underground single-walled pipes and unsealed manholes that transport liquid waste from the generating facilities to the liquid waste retention/storage system. The retention system consists of four lined and connected open-top concrete basins, which are also known as the 307 Retention Basins. Each basin has a holding capacity of approximately 25,000 gal (95,000 L). The monitoring system uses in-line gamma radiation detectors to monitor radiation levels in the liquids of the Retention Process Sewer. The gamma detectors are used to divert potentially contaminated wastewater to one of the 307 Basins for further evaluation. If contamination is detected

above specified action levels, the wastewater can be filtered to meet acceptance levels of the 300 Area TEDF, or if necessary trucked to the 200 Area for treatment and disposal.

4.3.2.23.4 340 Vault

The 340 Vault houses two 15,000-gal (57,000-L) radioactive mixed tanks that accumulated mixed waste for shipment to the 200 Area TSD facilities. The 340 Vault, the vault tanks, and the associated piping system are ventilated through the 340-NT-EX stack. Smearable and fixed contamination resulting from tank overfills and maintenance activities are documented in facility records.

4.3.2.24 300 Area Fuel Supply Facility

The 300 Area Fuel Supply Shutdown (FSS) Facility was previously known as the N Reactor Fuels Fabrication Facility. The FSS consists of 16 buildings, two Tank Farms, and associated pipe trenches and drains. The structures are located on the north side of the 300 Area. The 300 Area Fuels Fabrication Facilities began operation in 1944 with some structures being added in the 1950s and 1960s. The following sections provide information on each of the facilities. The 300 Area Fuel Fabrication Facility buildings have been decontaminated in preparation for D&D. Some the facilities have been demolished and removed as noted below. The remaining facilities, also noted below, will be decontaminated and demolished in calendar year 2006.

<u>Building</u>	<u>Current Function</u>
303-A	Uranium fuel element storage
303-B	Uranium billet storage
303-E	Uranium fuel element storage (empty)
303-G	Uranium billet storage
3712	Finished uranium fuel element and billet storage
3716	Unfinished uranium fuel element storage
313	Inactive fuels fabrication support facility, demolished in 2005
333	Inactive fuel manufacturing
303-K/3707-G	Inactive radioactive material and waste storage (303-K) and change room (3707-G), demolished 2001-2002
303-F	Inactive neutralized waste acid pump house
304/304-A	Inactive uranium concretion facility (304) and change room (304-A)
334-A	Inactive waste acid storage and transfer system (RCRA closure)
334	Inactive process sewer monitoring system
303-M	Uranium oxide facility (inactive)
311-TF	Inactive neutralized waste acid storage and transfer facility (adjacent to 303-F Building)
334-TF	Inactive product and waste acid storage facility (adjacent to the 334 Building)

The inactive waste transfer system (waste acid transfer system pipe trenches) between the 333, 334-A, 334-TF, 303-F, and 311-TF Facilities will be addressed under the CERCLA action for the 300-FF-2 Operable Unit. Two below-ground soil contamination areas are associated with this system and will be addressed during 300-FF-2 remediation work. After the 313 Building was demolished, an impermeable barrier was applied over the scabbled concrete surface that covers Soil Contamination Area 2.

4.3.2.24.1 333 Building

The primary N Reactor Fuels Fabrication activities were conducted in the 333 Building. The fuel fabrication operation produced N Reactor fuel from 1961 until 1987 when operations were stopped. This facility used a variety of mechanical, chemical, and electrical processes to convert uranium billets and assorted components into finished fuel assemblies for irradiation at N Reactor. Operations and resulting radionuclide air emissions in the 333 Building ceased in January 1987. Emission monitoring equipment was shut down at that time. Process liquid effluents are no longer generated. However, air conditioning water and stormwater continue to be discharged from the building by way of the process sewer.

Uranium and ^{99}Tc are the most significant radionuclides in surface contamination at the 333 Building. The building is vacant. Infiltration and exfiltration, induced by wind and ambient-pressure changes create the potential of fugitive emissions from the building.

4.3.2.24.2 313 Building

The 313 Building was demolished in 2005.

4.3.2.24.3 303-K/3707-G Radioactive Mixed Waste Storage Facility

The 303-K/3707-G Radioactive Mixed Waste Storage Facility was demolished in 2001-2002.

4.3.2.24.4 303-M Uranium Oxide Facility

The 303-M Uranium Oxide Facility is adjacent to the 333 Building and consists of one building, an adjacent outdoor drum storage area, and a small process sewer filter building. The 303-M Uranium Oxide Facility stored and treated recycled material generated during the N Reactor fuel fabrication processes. The fuel fabrication waste material consisted of pyrophoric saw fines and lathe turnings, known as chips, composed of slightly enriched uranium and Zircaloy-2. The wastes were calcinated to remove their pyrophoric properties, thus eliminating the possibility of spontaneous combustion during transportation.

The 303-M Uranium Oxide Facility operated from 1983 to 1987 for the calcination of the wastes generated. The facility ceased operating in 1987. During operation, the facility operated under negative pressure and the building exhaust was released to the atmosphere through a single stack. The emissions were controlled with a bag-house and HEPA filters.

The 303-M Building is currently closed. The water and electricity have been shut off and the exhaust stack capped. The primary radionuclides associated with the facility are uranium and ^{99}Tc .

4.3.2.24.5 304/304-A Uranium Concretion Facility

The 304 Building was designed and constructed in 1952 as a pilot plant for the lead-dip canning process. The uranium concretion equipment in the 304 Building was installed in 1971 with a drainage trench and sump to remove liquids resulting from spills, leaks, and daily operations. Standard spill-response procedures inside the building included washing the spilled waste to the sump where the fines would settle out. The wastewater was drained into the 300 Area process sewer, and the fines were shoveled from the sump and concreted. Additionally, an outside storage area is on the north side of the facility. The storage area is a concrete pad surrounded by asphalt. The 304-A Building is a change-room addition to the 304 Building.

The building has no inlet air supply system, the water is shut off, and drains have been plugged. The exhaust stack was capped in 1994. Uranium and ^{99}Tc are the primary radionuclides potentially present in fugitive emissions via personnel and equipment access doors.

4.3.2.24.6 311 Tank Farm

The recoverable and nonrecoverable uranium-bearing neutralized waste solutions from the 313 Building were combined in aboveground tanks (tanks 40 and 50) in the 311 Tank Farm. These liquid wastes eventually were transferred to tanker trucks and disposed of in the 183-H Basins or the 200 Areas. After 1988, if the wastes were below radioactive release limits, they were shipped to offsite contractors for treatment, storage, and/or disposal. The two tanks received approximately 420,000 gal (1.6 million L) of waste each year, during periods of peak production.

In addition to waste tanks 40 and 50, the 311 Tank Farm has a 4,000-gal (15,000-L) tank used to store nitric acid and two 10,000-gal (38,000-L) tanks that were used to store sodium hydroxide. The tanks were emptied in 1991 and no longer contain nitric acid or sodium hydroxide. Uranium and ^{99}Tc are the potential primary radioactive constituents in fugitive emissions from the 311 Tank Farm.

4.3.2.24.7 334-A Waste Acid Storage Building

The 334-A Waste Acid Storage Building was completed in late 1974 and placed in use in January 1975. For four months in 1973, an underground tank and tank 4 in the 334 Tank Farm were used to collect acid waste that would be transferred to the 313 Building for neutralization. The underground tank began to leak in August 1973 and was removed during construction of the 334-A Building. The waste acids were discharged directly into the process sewer until the 334-A Building was built in December 1974. The tanks in the 334-A building received approximately 210,000 gal (790,000 L) of waste acids per year. These waste acids consisted of hydrofluoric, nitric, and sulfuric acids with copper, zirconium, chromium, and uranium in solution. Following storage, the acids were pumped from the 334-A Building to the south end of the 313 Building for neutralization.

The building heating and cooling air handling systems have been shut down, the water and electricity have been shut off, and drains have been plugged. The storage tanks in the building have been isolated and cleaned. Uranium and ^{99}Tc are the potential primary radioactive constituent in fugitive emissions from the 334-A Building. The potential fugitive emission release points include personnel and equipment access doors.

4.3.2.24.8 303-A, 303-B, and 303-G Uranium Fuel Storage Buildings

The fuel stored in the 303-A, 303-B and 303-G Buildings includes unused fuel elements and some irradiated fuel elements that had been loaded into N Reactor. The uranium billets have been transferred to Portsmouth, Ohio, under the Tri-Party Agreement. The fuel elements that had been loaded into N Reactor were recovered during reactor defueling with only low levels of surface contamination on them. These fuel elements are appropriately packaged for safe handling and storage at their present storage location. The structures are single story concrete block and cement construction with only three doors and no windows. The roofs are precast concrete slabs covered with felt, tar, and gravel. There are four 10-in.- (25-cm-) diameter holes in the walls at floor level for water drainage in the unlikely event of a sprinkler system discharge. The buildings are unheated and are not provided with active ventilation. The buildings are equipped with automatic fire detection and sprinkler (dry) systems with freeze protection in the valve rooms. Infiltration and exfiltration, induced by wind and ambient-pressure changes, results in potential fugitive emissions from equipment and personnel access doors.

4.3.2.24.9 303-E Uranium Fuel Storage Building

No fuel is currently stored in the 303-E Building. Until 1996, the 303-E Building had been used to store non-irradiated fuel, like the 303-A, 303-B, and 303-G Buildings, until the fuel inventory in the building was removed. Only small quantities of radiological contamination remain in the building. Infiltration and exfiltration, induced by wind and ambient-pressure changes, result in potential fugitive emissions from equipment and personnel access doors.

4.3.2.24.10 3712 Uranium Fuel Storage Building

The 3712 Building is a one-story steel-frame structure with metal panel siding, metal panel roof, and a concrete floor and foundation. The building was used to store finished fuel elements, uranium scrap and standards, and unfinished fuel pieces. Some fuel elements remain. An HVAC unit provides heating and cooling of the south portion of the building, when occupied. Infiltration and exfiltration, induced by wind and ambient-pressure changes, results in potential fugitive emissions from equipment and personnel access doors.

4.3.2.24.11 3716 Uranium Fuel Storage Building

The 3716 Building is a single-story building with insulated aluminum siding and roof. The building was used to store unfinished fuel pieces, which were capped with plastic caps and kept in wooden boxes. Some fuel elements remain. The steam heating system and evaporative cooler for the building have been shut down. Infiltration and exfiltration, induced by wind and ambient-pressure changes, results in potential fugitive emissions from equipment and personnel access doors.

4.3.2.24.12 Waste Transfer System

The waste transfer system served as an inter-facility pipe chase between the 333 Building, 334-A Building, 334 Tank Farm, 313 Building, 303-F Building, and the 311 Tank farm. This system comprised various-sized concrete trenches topped with removable reinforced concrete or steel panels. Due to historic spills, there are some portions of the system that contain small quantities of radioactive contamination, much of which was cleaned up during the system deactivation and closure. No ventilation system is associated with the pipe chase. Infiltration and exfiltration, induced by wind and ambient-pressure changes, create the potential of fugitive emissions from crevices between the pipe chase covers.

4.3.2.25 Fast Flux Test Facility

FFTF is a 400-megawatt-thermal, sodium-cooled, fast-neutron-flux reactor designed specifically for irradiation testing of nuclear reactor fuels and materials for liquid-metal, fast-breeder reactors. The reactor is currently shut down.

Radionuclides primarily associated with FFTF include ^3H and ^{137}Cs . The potential primary fugitive emission release points include the personnel and equipment access doors and the inlet-exhaust ventilation system.

4.3.2.26 Waste Sampling and Characterization Facility Ancillary Facilities

4.3.2.26.1 6265A Building

The Solid Waste Storage Area (6265A Building) is an open-sided, outdoor, 90-Day Accumulation Area used for temporary storage of drums or other low-level radioactive waste packages.

4.3.2.26.2 6266A Building

The Contaminated Liquid Retention Vault (6266A Building) contains two 3,785-liter polyethylene tanks in a common concrete vault. The tanks were designed to receive low-level inorganic, radiologically contaminated liquid waste or sample excess from the analytical laboratory. The liquid is transferred to an approved disposal facility on the Hanford Site using a portable tank truck. This building also provides temporary storage of drums or other low-level radioactive waste packages.

4.3.2.26.3 6267 Building

The Environmental Sample Archive Building (6267 Building) provides for controlled storage, indexing, categorizing, and retrieval of low-level radiological samples. Storage is provided for up to 2,500 samples requiring refrigerated storage and up to 11,500 samples requiring ambient storage. This building also provides for temporary storage of drums and other low-level radioactive waste packages.

4.3.2.26.4 6268 Building

The Sample Equipment Cleaning Facility (6268 Building) provides cleaning for the various tools used for collecting samples from the field. The tools are scrubbed and given solvent and acid baths to clean residual chemicals. No radioactive materials are allowed in this building. Administrative controls are in place to prevent any radioactive materials from entering the building.

4.3.2.26.5 6269 Building

The Mobile Laboratory Storage Facility (6269 Building) houses up to five mobile laboratories and provides protection from adverse weather conditions for the instrumentation and computers contained inside the laboratories. This area also contains calibration laboratory instrumentation used in the mobile laboratories and a sample preparation area for adding chemical buffers and preservatives to sample containers. The building also provides temporary storage of drums or other low-level radioactive waste packages.

4.3.2.26.6 6270 Building

The Environmental Data/Remedial Tracking System Facility (6270 Building) provides accommodations for computerized records data processing to retain records on sample inventories, tracking data, and sample analysis data. This facility is nonradioactive and is used primarily to house administrative personnel.

4.3.2.27 Purgewater Storage Tanks

The purgewater Modutanks, located in the 600 Area but near the 200 Areas, store and treat groundwater that has been purged from Hanford wells. The tanks, which each hold one million gallons, are located aboveground, double-lined, and open to the atmosphere.

This page intentionally left blank.

5.0 SUPPLEMENTAL INFORMATION

This section has supplemental information related to Hanford Site radionuclide air emissions in 2005 and consists of the following:

- Population dose estimate
- Compliance status with Subparts Q and T of 40 CFR 61
- Radionuclide emission estimates and periodic confirmatory measurement information related to Notices of Construction (NOCs)
- Ambient air sampling measurements
- Quality assurance (QA) program status of compliance with 40 CFR 61, Appendix B, Method 114.

5.1 POPULATION DOSE ESTIMATE

The estimated regional population radiation dose (i.e., the collective effective dose equivalent [EDE]) from Hanford Site air emissions in 2005 was calculated using the GENII computer code (PNL-6584). This population consisted of approximately 486,000 people residing within a 50-mi (80-km) radius of the five designated Hanford Site operational areas (PNNL-14428). Pathways evaluated for population exposure to releases of radionuclides from the Hanford Site to the atmosphere include inhalation, air submersion, ground-shine, and consumption of food. Population exposure to radionuclide air emissions was determined using values of population-weighted atmospheric dispersion factors for distance and each compass sector.

The collective EDE for 2005 from radionuclide air emissions was 0.10 person-rem (0.0010 person-Sv). Radionuclide releases from the Hanford Site to surface water added 0.23 person-rem (0.0023 person-Sv). Therefore, the total population dose in 2005 from both airborne and liquid-borne radionuclides originating from the Hanford Site was 0.33 person-rem (0.0033 person-Sv).

5.2 COMPLIANCE STATUS WITH 40 CODE OF FEDERAL REGULATIONS PART 61, SUBPARTS Q AND T

In 40 CFR 61, Subpart Q, "National Emission Standards for Radon Emissions From Department of Energy Facilities," paragraph 61.190 states that the provisions of Subpart Q apply to the design and operation of all storage and disposal facilities for radium-bearing material that emit ^{222}Rn to the air. Paragraph 61.191(b) states that a source means any building, structure, pile, impoundment, or area used for interim storage or disposal that is or contains waste material containing radium in sufficient concentration to emit ^{222}Rn in excess of a standard of 20 pCi/m²/s. The known quantities of ^{226}Ra (the immediate precursor to ^{222}Rn) stored at the Hanford Site were evaluated and found to decay to ^{222}Rn at a rate below the standard.

Activities at the Hanford Site were evaluated for compliance with 40 CFR 61 Subpart T, "National Emission Standards for Radon Emissions From the Disposal of Uranium Mill Tailings." In paragraph 61.220, "Designation of Facilities," owners and operators of such facilities are subject to the provisions in Subpart T: those whose sites were used for the disposal of tailings and that managed

residual radioactive material or uranium byproduct materials during and following the processing of uranium ores and that are listed in or designated by the Secretary of Energy under Title I of the Uranium Mill Tailings Control Act of 1978 or regulated under Title II of that act. Since no uranium milling and uranium-ore processing activities are conducted at the Hanford Site, Subpart T does not apply.

5.3 EMISSION ESTIMATES AND PERIODIC CONFIRMATORY MEASUREMENT DATA FOR SPECIFIC NOTICES OF CONSTRUCTION

This section contains emission estimates and periodic confirmatory measurement data as required by specific NOCs and other regulatory agreements.

5.3.1 Sitewide Notices of Construction for Portable Exhausters

This section contains information on portable exhausters covered by sitewide NOCs. Portable exhausters are referenced in *Air Emissions Notice of Construction for Portable/Temporary Radioactive Air Emission Units* (PTRAEUs; DOE/RL-95-75) and in *Radioactive Air Emissions Notice of Construction for HEPA Filtered Vacuum Radioactive Air Emission Units* (DOE/RL-97-50), which require that the estimated emissions from these units be summarized in this document. The information in Tables 5-1 and 5-2 fulfills that requirement.

When yearly documentation demonstrates that the handling limits for the emission units have not been exceeded, the estimated emissions are considered to be equal to or less than the values provided in the respective NOC.

Table 5-1. Emission Estimates for Portable/Temporary Radioactive Air Emission Units in 2005.

Unit Type	Radionuclide	Annual estimated emissions, Ci
Type I Units	¹³⁷ Cs	5.4 E-06 ^a
Type II Units	did not operate	
Type III Units	did not operate	

1 Ci = 1 curie = 3.7 E+10 becquerels (Bq)

^a Emissions in 2005 were summarized by calculating a ratio of the total hours of operation during that year (694.78 hr/8,760 hr/yr) to the annual abated release limit (i.e., 6.86 E-05 Ci/yr) in the PTRAEU Notice of Construction (DOE/RL-95-75) to obtain emissions represented by the hours of operation.

Table 5-2. HEPA-Filtered Vacuum Usage for 2005.

Facility	Area	Alpha possession quantity NOC limit, Ci	Beta-gamma possession quantity NOC limit, Ci	Alpha possession quantity in 2005, Ci	Beta-gamma possession quantity in 2005, Ci	Estimated Actual Emissions, Ci	
						Beta-gamma	Alpha
ETF	200-E	4.57 E-03	2.30 E-01	NA	2.90 E-07	0	NA
WESF	200-E	4.57 E-03	2.30 E-01	0	5.00E-03	0	NA
LLBG	200-W	7.70 E-03	3.88 E-01	1.27 E-06	1.31 E-08	0	0
PPF	200-W	7.70 E-03	3.88 E-01	5.05 E-10	NA	NA	0
Tank Farms	200-E	4.57 E-03	2.30 E-01	6.17 E-06	1.76 E-06	0	0

1 Ci = 1 curie = 3.7 E+10 becquerels (Bq).

ETF = Effluent Treatment Facility; WESF = Waste Encapsulation Storage Facility; LLBG = Low-Level Burial Grounds; PFP = Plutonium Finishing Plant

5.3.2 Miscellaneous Periodic Confirmatory Emission Measurements

Table 5-3 shows information that confirms low emissions, as verified by results from nondestructive analysis of HEPA filters.

Table 5-3. Nondestructive Analysis Results for 2005.

Location	Analysis date	Filtration	Radionuclide	Ci
Categorical Guzzler Vacuum Excavation System	6/6/05	3 HEPA filters separated and removed from truck	¹³⁷ Cs	0
	9/6/05	3 HEPA filters separated and removed from truck	¹³⁷ Cs	0

1 Ci = 1 curie = 3.7 E+10 becquerels (Bq); HEPA = high-efficiency particulate air.

Table 5-4 shows information that confirms low emissions, as verified by results from destructive analysis of K Basins Closure Project HEPA filter and sample filters.

Table 5-4. K Basins Closure Project Destructive Analysis Results for 2005.

Stack (Location; EDP code)	Filter medium	Radionuclides or type of radioactivity	Activity, pCi
105-KW Air Sparging Vent (105-KW Basin; Y249)	HEPA ^a	⁹⁰ Sr	1.8 E+05
		¹³⁷ Cs	7.9 E+04
		¹⁵⁴ Eu	8.6 E+02
		²³⁸ Pu	1.5 E+03
		^{239/240} Pu	1.4 E+04
		²⁴¹ Am	1.9 E+04

Table 5-4. K Basins Closure Project Destructive Analysis Results for 2005.

Stack (Location; EDP code)	Filter medium	Radionuclides or type of radioactivity	Activity, pCi
105-KE Sludge and Water Purge Vent (105-KE Basin; Y267)	Versapor 3000 ^a (104-mm dia.)	⁹⁰ Sr	8.2 E+00
		²³⁸ Pu	3.7 E+03
		^{239/240} Pu	2.9 E+04
		²⁴¹ Pu	2.5 E+05
		²⁴¹ Am	5.6 E-01
105-KE Sludge and Water Purge Vent (105-KE Basin; Y268)	Versapor 3000 ^a (47-mm dia.)	⁹⁰ Sr	7.8 E+01
		¹³⁷ Cs	1.3 E+02
		²⁴¹ Pu	1.4 E+02

ND = not detected; HEPA = high-efficiency particulate air.

1 Ci = 1 curie = 3.7 E+10 becquerels (Bq).

^a These sample filters in unrelated separate incidents were wetted with presumably radioactively contaminated basin water, which accounts for higher-than-expected activities, not reflective of actual emissions also captured by the filter media and that could not be mathematically quantified within the total activities.

5.3.3 Periodic Confirmatory Measurements on Notice of Construction Sources

This section identifies NOCs active in 2005 that were potential sources of radionuclide emissions. As part of the approval process for these NOCs, potential maximum emission levels were calculated based on descriptions of work proposed at the sources. The calculated levels would cause negligible dose impacts, and the sources are not usually amenable to conventional gaseous-extraction, or record sampling. As a consequence, WDOH has approved a variety of alternative measurement methods, defined below, by which to periodically confirm that NOC sources generate only low emissions of radionuclides.

Information on active NOCs and their corresponding methods of PCMs are summarized in Table 5-5. The NOCs listed are consistent with the database maintained for the Hanford Site Air Operating Permit; PCM details are kept on file.

In the far right-hand column of Table 5-5, "Y" stands for "yes," "N" for "no," and "NA" for "not applicable." All "Y" entries are qualified by a superscripted numeral. The superscripted numerals correspond to the PCM verification methods used, which are:

- 1A — stack monitoring; see Table 2-1*
- 1B — stack monitoring; see Table 2-2*
- 2 — dose-rate surveys and/or surface smears
- 3 — continuous air monitor (CAM) data
- 4 — ambient air monitoring near sources
- 5 — nondestructive analysis (NDA) of HEPA filters; see Table 5-3, if applicable
- 6 — estimates derived from using factors in 40 CFR 61, Appendix D
- 7 — destructive analysis of HEPA filters.

* Using this PCM method, airborne radionuclides originating from an NOC source are by design drawn into a stack ventilation system and sampled as part of the cumulative emission exhausted via that stack.

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
BNI				
Waste Treatment and Immobilization Plant (200 Area Diffuse and Fugitive, Guzzler, 200E J-WTP 001, 200E J-WTP 002)	Excavation Activities for the Building of Temporary Construction Facilities and Main Facilities (DOH NOC ID 482)	AIR 02-1014	10/24/02	Y ²
Waste Treatment and Immobilization Plant (HV-C2, HV-S1, HV-S2, HV-S3A, HV-S3B, HV-S4, IHLW-S1)	Construction of WTP High Level Waste Vitrification Plant (DOH NOC ID 509)	AIR 03-1012 (obsolete 7/8/05)	10/22/03	NA
	Construction of WTP High Level Waste Vitrification Plant Rev. 1 (DOH NOC ID 625)	AIR 05-703	7/8/05	NA
Waste Treatment and Immobilization Plant (LB-C2, LB-S1, LB-S2)	Construction of WTP Laboratory (DOH NOC ID 510)	AIR 03-1013 (obsolete 7/21/05)	10/22/03	NA
	Construction of WTP Laboratory Rev. 1 (DOH NOC ID 626)	AIR 05-705	7/21/05	NA
Waste Treatment and Immobilization Plant (ILAW-C2, LV-C2, LV-S1, LV-S2, LV-S3)	Construction of WTP Low Activity Waste Vitrification Plant (DOH NOC ID 511)	AIR 03-1014 (obsolete 7/21/05)	10/22/03	NA
Waste Treatment and Immobilization Plant (LV-C2, LV-S1, LV-S2, LV-S3,)	Construction of WTP Low Activity Waste Vitrification Plant Rev. 1 (DOH NOC ID 627)	AIR 05-706 (obsolete 10/14/05)	7/21/05	NA
	Construction of WTP Low Activity Waste Vitrification Plant Rev. 1A (DOH NOC ID 627)	AIR 05-1004	10/14/05	NA
Waste Treatment and Immobilization Plant (PT-C2, PT-S1, PT-S2, PT-S3, PT-S4)	Construction of WTP Pretreatment Plant (DOH NOC ID 512)	AIR 03-1015 (obsolete 7/21/05)	10/22/03	NA
	Construction of WTP Pretreatment Plant Rev. 1 (DOH NOC ID 628)	AIR 05-707	7/21/05	NA
CH2M HILL				
222-S Laboratory (200W S-296S021-001)	Hot Cell Expansion (DOH NOC ID 10)	AIR 02-1211	12/13/02	Y ^{1B} (296-S-21)
242-A Evaporator (200E P-242A-002)	Stack 296-A-22 Downgrade, Rev 0 (DOH NOC ID 284)	AIR 04-812	8/23/04	Y ^{1B} (296-A-22)
241-AN Tank Farm (200 Area Diffuse and Fugitive)	Installation and Operation of a New Ventilation System, Phase I (DOH NOC ID 565)	AIR 03-602	6/3/03	Y ² ; Y ⁴ (Table 5-6)
241-AN Tank Farm (200E P-296AN-001)	Installation and Operation of a Waste Retrieval System (DOH NOC ID 449)	AIR 04-206	2/18/04	Y ^{1A} ; NA; Y ²
241-AN & 241-AW Tank Farms (200E P-296A044-001, 200E P-296A045-001, 200E P-296A046-001, 200E P-296A047-001)	Operation of New Ventilation systems in the AN and AW Tank Farms (DOH NOC ID 593)	AIR 05-208	2/24/05	NA

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
241-AW Tank Farm (200 Area Diffuse and Fugitive)	Installation and Operation of a New Ventilation System (DOH NOC ID 566)	AIR 03-712	8/1/03	Y ² ; Y ⁴ (Table 5-6)
241-AP Tank Farm (200E P-296AP-001)	Installation and Operation of Waste Retrieval System in Tanks 241-AP-102 and 241-AP-104 (DOH NOC ID 421)	AIR 03-1105	11/14/03	NA
241-AY/AZ Tank Farm (200E P-296A042-001)	241-AY and 241-AZ Ventilation Upgrades (DOH NOC ID 290)	AIR 02-1239	12/31/02	Y ^{1A} (296-A-42); Y ⁴ (Table 5-6)
		AIR 03-116 (replacement pages for AIR 02-1239)	1/30/03	
241-AZ Tank Farm (200E P-296A042-001, 200 Area Diffuse and Fugitive, Guzzler)	Installation and Operation of a Waste Retrieval System (DOH NOC ID 296)	AIR 02-503 (obsolete 7/26/05)	5/9/02	Y ^{1A} : NA; Y ² ;
	Installation and Operation of a Waste Retrieval System (DOH NOC ID 624)	AIR 05-708	7/26/05	Y ⁴ (Table 5-6)
241-AZ Tank Farm (200E P-296A020-001)	241-AZ Tank Farm Annulus Exhauster Operation (DOH NOC ID 468)	AIR 01-805	8/22/01	Y ^{1B} (296-A-20)
241-C Tank Farm (200 Area Diffuse and Fugitive, 200 P-296P048-001)	Waste Retrieval from the 241-C 200 Series Tanks (DOH NOC ID 579)	AIR 04-401	4/5/04	Y ^{1A} (296-P-48); Y ² ; Y ⁴ (Table 5-6)
241-C-106 Tank (200 Area Diffuse and Fugitive, 200E P-296P047-001)	Liquid Pumping and Enhanced Sluicing (DOH NOC ID 540)	AIR 03-1102	11/10/03	NA
241-C-106 Tank (200 Area Diffuse and Fugitive, 200E P-241C104-001, 200E P-241C105-001, 200E P-241C106-001.)	Installation of Breather Filter on Tank 241-C-106 (DOH NOC ID 539)	AIR 03-203	2/7/03	NA
241-ER-152 Diversion Box (200 P-241ER152-001, 244-A Lift Station Valve Pit)	241-ER-152 Diversion Box and 244-A Lift Station Pit Work (DOH NOC ID 340)	AIR 03-1104 (obsolete 4/12/05)	11/14/03	Y ²
		AIR 05-403	4/12/05	Y ⁴ (Table 5-6)
241-S Tank Farm (200 Area Diffuse and Fugitive, 200W P-241S102-001, 200W P-241P043-001, 200W P-241P044-001)	Installation and Operation of a Waste Retrieval System in Tank 241-S-102 (DOH NOC ID 567)	AIR 04-503	5/17/04	Y ^{1A} (296-P-43, 296-P-44) Y ² Y ⁴ (Table 5-6)
241-S-112 Tank (200 Area Diffuse and Fugitive, 200W 241-S-112, 200 W P-241P043-001)	Installation and Operation of a Waste Retrieval System in Tank 241-S-112 (DOH NOC ID 550)	AIR 04-406 (obsolete 9/29/05)	4/15/04	Y ^{1A} (296-P-43); Y ² ;
		AIR 05-914	9/29/05	Y ⁴ (Table 5-6)

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
241-SX Tank Farm (200W P-296SX-001)	Rotary Mode Core Sampling Systems at 241-SX Tank Farm (DOH NOC ID 242)	AIR 02-1237	12/31/02	NA
	Saltwell Pumping Tanks 241-SX-101, 241-SX-102, 241-SX-103, and 241-SX-105 (DOH NOC ID 423)	AIR 02-1248	12/31/02	
244 DCRTs Isolation and Closure (200 Area Diffuse and Fugitive, 200E P-244A-002, 200E P-244BX-002, 200W P-244S-002, 200W P-244TX-002,)	Isolation and Closure of Stacks 296-A-25, 296-B-28, 296-S-22, and 296-T-18 (DOH NOC ID 578)	AIR 03-611	6/26/03	Y ²
244-CR DCRT (200E P-244CR-002, 200E P-244CR-003, 200E P-296P47-001, Guzzler, 200 Area Diffuse and Fugitive-TF)	244-CR Vault Isolation and Interim Stabilization (DOH NOC ID 548)	AIR 02-1255	12/31/02	Y ^{1A} (296-P-47); Y ⁴ (Table 5-6)
Tank Farms, Bulk Vit Demo (200 Area Diffuse and Fugitive-TF, Bulk Vit Demo Exhauster)	Supplemental Treatment Test and Demonstration Facility (DOH NOC ID 590)	AIR 04-1001	10/4/04	Y ² : NA; Y ⁴ (Table 5-6)
Tank Farms (200 Area Diffuse and Fugitive-TF)	Tank Farms Decontamination Trailer (DOH NOC ID 571)	AIR 03-502	5/23/03	Y ²
	Vapor Sampling of Miscellaneous Underground Units with No Known Path of Ventilation (DOH NOC ID 489)	AIR 02-1252	12/31/02	
Tank Farms (200 Area Diffuse and Fugitive-TF, PTRAEU)	Categorical Tank Farm Facility Entry and Surveillance (DOH NOC ID 486)	AIR 02-1251	12/31/02	NA
Tank Farms, Guzzler (Guzzler at Tank Farms)	Guzzler Excavation and Backfilling Activities in Support of the 200 East Area A Farm Complex (DOH NOC ID 250)	AIR 02-1238	12/31/02	Y ² ; Y ⁵ (Table 5-3)
Tank Farms, Project E-525 (200 Area Diffuse and Fugitive-TF, 200E P-241AZ301-001)	Double Shell Tanks Transfer System Modifications (DOH NOC ID 555)	AIR 04-1208	12/23/04	Y ² ; Y ⁴ (Table 5-6)
Tank Farms, Project W-314 (200 Area Diffuse and Fugitive, PTRAEU, GUZZLER)	Tank Farms Restoration and Safe Operations (Project W-314) (DOH NOC ID 561)	AIR 03-1101	11/3/03	Y ⁴ (Table 5-6); Y ⁵ (Table 5-3); Y ⁶ (Table 5-1)
Tank Farms, Retrieval Project (200 Area Diffuse and Fugitive-TF, GUZZLER)	Categorical Tank Farm Facility Waste Retrieval and Closure Phase I, Site Preparation and System Installation (DOH NOC ID 586)	AIR 04-306 (obsolete 4/21/05)	3/10/04	Y ² ; Y ⁴ (Table 5-6)
		AIR 05-406	4/21/05	

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
Tank Farms, Retrieval Project (200 Area Diffuse and Fugitive-TF, 296-P-43, 296-P-44, 296-P-45, 296-P-47, 296-P-48, 296-P-49, 296-P-50)	Categorical Tank Farm Facility Waste Retrieval and Closure Phase II, Waste Retrieval Operations (DOH NOC ID 587)	AIR 04-1202 (obsolete 3/8/05)	12/07/04	NA
		AIR 05-302 (obsolete 4/26/05)	3/14/05	
		AIR 05-407	4/26/05	
Tank Farms, RMCS (200E P-296P033-001; 200E P-296P034-001)	Rotary Mode Core Sampling Systems 3 and 4 (DOH NOC ID 607)	AIR 04-904	9/17/04	NA
Tank Farms, Saltwell Pumping (200 P-296P033-001, 200 P-296P034-001, 200 P-296P043-001, 200 P-296P044-001, 200 P-296P045-001, 200 Area Diffuse and Fugitive)	Portable Exhauster Use During Saltwell Pumping Tanks (DOH NOC ID 327)	AIR 02-1020	10/25/02	NA
Tank Farms, Stack Monitoring System Upgrades (200E P-296P016-001, 200E P-241A-001, 200E P-244BX-001, 200E P-244CR-001, 200W P-244S-001, 200W P-244TX-001)	Stack Monitoring System Upgrades (Project W-420) (DOH NOC ID 339)	AIR 02-1235	12/31/02	NA
		AIR 03-116 (replacement pages for AIR 02-1235)	1/30/03	
Tank Farms, Vadose Zone (200 Area Diffuse and Fugitive, Air Rotary Drilling, Air Hammer Drilling)	Vadose Zone Characterization (DOH NOC ID 5)	AIR 02-1232	12/31/02	Y ² ; Y ⁴ (Table 5-6)
		AIR 03-116 (replacement pages for AIR 02-1232)	1/30/03	
ERC/RCC				
Radiological Counting Facility (300 S-RCF-EX 002)	Operation of the Radiological Counting Facility (DOH NOC ID 490)	AIR 02-309 (obsolete 3/11/05)	3/26/02	Y ^{1B} (RCF-2-EX)
		AIR 05-111 (void 2/8/05)	1/19/05	
		AIR 05-206	2/8/05	
FH				
183-KW (100 Area Diffuse and Fugitive)	Stabilization of Two Concrete Boxes Containing Ion Exchange Columns (DOH NOC ID 526)	AIR 02-810	8/26/02	NA
200 Area (200 Area Diffuse and Fugitive, PTRAEU, HEPA Vac, Guzzler)	Roof Replacement Activities on the Central Plateau (DOH NOC ID 461)	AIR 02-514	5/31/02	NA
200 Area Interim Storage Area at the CSB (200 W-PORTEX 005)	Construction and Operation of the 200 Area Interim Storage Area at the CSB (DOH NOC ID 272)	AIR 02-709	7/24/02	Y ²

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
200 Area Effluent Treatment Facility (200E P-2025E ETF, 200 Area Diffuse and Fugitive-LERF/ETF)	Operation of LERF and 200 Area ETF (DOH NOC ID 562)	AIR 04-101	1/5/04	Y ^{1B} (296-E-1); Y ^A (Table 5-6)
200 Area Liquid Effluent Retention Facility (200E P-242AL42-001, 200E P-242AL43-001, 200E P-242AL44-001)				
224-T Facility (200W Diffuse and Fugitive, 291-T-1, PTRAEU)	Characterization of the 224-T Facility Process Cells (DOH NOC ID 500) [now under Consolidated T Plant Activities]	AIR 02-704 (obsolete 5/11/05)	7/25/02	NA
300 Area (300 Area Diffuse and Fugitive)	300 Area Excavation Activities (DOH NOC ID 546)	AIR 02-1225	12/20/02	Y ^A (Table 5-6)
324 Building (300 EP-324-01-S, 300 Area Diffuse and Fugitive)	324 Building Cleanout and Deactivation Activities (DOH NOC ID 502)	AIR 03-106	1/10/03	Y ^{1A} (EP-324-01-S); Y ^A (Table 5-6)
327 Building (300 EP-327-01-S, 300 EP-327-02-V, 300 Area Diffuse and Fugitive)	Deactivation of the 327 Building (DOH NOC ID 505)	AIR 03-107	1/10/03	Y ^{1A} (EP-327-01-S); Y ^{1B} (EP-327-02-V); Y ^A (Table 5-6)
340-A Building (300 P-340NTEX-001)	340-A Building Tank Sludge Cleanout (DOH NOC ID 228)	AIR 03-1203 (obsolete 2/15/05)	12/8/03	Y ^{1A} (340-NT-EX)
	Operation of the 340 Waste Storage Facility (DOH NOC ID 589)	AIR 05-114	1/24/05	
B Plant (200E P-296B001-001)	Modification of the Ventilation System (DOH NOC ID 235)	AIR 03-1216 (obsolete 6/24/05)	12/23/03	Y ^{1A} (296-B-1)
	Operation of the 296-B-1 Emission Unit (DOH NOC ID 621)	AIR 05-604	6/24/05	
B Plant (200E P-296B002-001)	Modification of the Ventilation System (DOH NOC ID 235)	AIR 03-1216 (obsolete 12/23/03)	12/23/03	NA
Canister Storage Building (200E P-296H212-001)	Construction and Operation of the Canister Storage Building (DOH NOC ID 289)	AIR 02-713	7/29/02	Y ^{1A} (296-H-212)
Central Waste Complex (200W J-CWC 001, 200W W-PORTEX 011)	Central Waste Complex Operations (DOH NOC ID 295)	AIR 02-710	7/29/02	Y ³ (W130); Y ^A (Table 5-6)
Cold Vacuum Drying Facility (100K P-296K142 001)	Construction and Operation of the Cold Vacuum Drying Facility (DOH NOC ID 229)	AIR 01-1206	12/20/01	Y ^{1A} (296-K-142)
FFTF Sodium Storage Facility (400 Sodium Storage Facility)	Construction and Operation of the Sodium Storage Facility (DOH NOC ID 65)	AIR 02-1101	11/26/02	Y ² ; Y ^A (Table 5-8)
Low Level Burial Grounds (200 Area Diffuse and Fugitive, HEPA Vac, Drum Venting System, Drum Venting Passive)	Operation of the Transuranic Waste Retrieval Project (DOH NOC ID 582)	AIR 03-1206	12/9/03	Y ² ; Y ^A (Table 5-6)

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
Low Level Burial Grounds (200W P-Trench31 001, 200W P-Trench34 001)	Low Level Burial Grounds, Trench 31 [T31] & 34 [T34] Leachate Collection and Storage Tank, Rev. 0 (DOH NOC ID 377)	AIR 02-1219	12/13/02	NA: T31; Y ² : T34
Plutonium Finishing Plant (200 Area Diffuse and Fugitive, Concrete Containers)	Deactivation of the Plutonium Finishing Plant Complex (DOH NOC ID 608)	AIR 04-1209 (obsolete 12/1/05)	12/28/04	Y ⁴ (Table 5-6); Y ² ; Y ³
		AIR 05-1101	11/2/05	
Plutonium Finishing Plant (200W P-291Z001-001)	Deactivation of the Plutonium Finishing Plant Complex (DOH NOC ID 608)	AIR 04-1209 (obsolete 12/1/05)	12/28/04	Y ^{1A} (291-Z-1)
		AIR 05-1101	11/2/05	
Plutonium Finishing Plant (200W P-296Z003-001, 200 Area Diffuse and Fugitive, 241-Z PTRAEUs) Transferred to CERCLA 6/05	Decontamination for Transition of the 241-Z Liquid Waste Treatment Facility (DOH NOC ID 563)	AIR 03-1109	11/21/03	Y ^{1A} (296-Z-3); Y ² ; Y ³ ; Y ⁴ (Table 5-6)
Plutonium Finishing Plant (200W P-296Z005-001, 200W P-296Z006-001, 200W P-296Z007-001)	Deactivation of the Plutonium Finishing Plant Complex (DOH NOC ID 608)	AIR 04-1209 (obsolete 12/1/05)	12/28/04	Y ^{1A} (296-Z-7); Y ^{1B} (296-Z-5, 296-Z-6)
		AIR 05-1101	11/2/05	
Plutonium Finishing Plant (200W P-296Z015-001) Transferred to CERCLA 6/05	Deactivation of the Plutonium Finishing Plant Complex (DOH NOC ID 608)	AIR 04-1209 (obsolete 12/1/05)	12/28/04	Y ^{1B} (296-Z-15)
		AIR 05-1101	11/2/05	
PUREX Storage Tunnels (200E P-296A010-001)	Reactivation of PUREX Storage Tunnel Number 2 (DOH NOC ID 417)	AIR-02-1221	12/13/02	NA
Purgewater Storage and Treatment Facility (200 J-NONPOINT 012)	Purgewater Storage and Treatment Facility, Purgewater Modutanks (DOH NOC ID 7)	AIR 03-1201	12/8/03	Y ⁴ (Table 5-6)
T Plant Complex (200W P-291T001-001, 200 Area Diffuse and Fugitive, PTRAEU)	Exhaust Fan Replacement for 291-T-1 Stack (DOH NOC ID 504)	AIR 02-509 (closed 3/31/05)	5/22/02	Y ⁴ (Table 5-6)
	T Plant Complex Fuel Removal Project, Rev. 1 (DOH NOC ID 499)	AIR 01-1010 (obsolete 5/11/05)	10/16/01	Y ^{1B} (291-T-1); Y ⁴ (Table 5-6)
	Storage In T Plant Complex of Sludge from K Basins (DOH NOC ID 445)	AIR 03-1208 (obsolete 5/11/05)	12/24/03	
	Consolidated T Plant Operations (DOH NOC ID 610)	AIR 05-408	4/26/05	
T Plant Complex (200W P-296T007-001)	Secondary Containment and Leak Detection Upgrades to the 2706-T, 2706-TA, and 2706-TB Buildings (DOH NOC ID 164)	AIR 02-1214	12/13/02	Y ^{1B} (296-T-7)
Waste Encapsulation and Storage Facility (200E P-296B010-001)	Liquid Low-Level Radioactive Stream Piping Modification and Contingency Operations, Rev 0A (DOH NOC ID 259)	AIR 02-1218	12/13/02	Y ^{1A} (296-B-10)
		AIR 03-116 (replacement pages for AIR 02-1218)	1/30/03	

Table 5-5. Periodic Confirmatory Measurements on Notice of Construction Emission Sources in 2005.

Location (AOP Emission Point)	Project	Permit ID	Issue Date	Low emissions verified? (Y, N, or NA) ^a
Waste Receiving and Processing Facility (200W P-296W4-001, 200 Area Diffuse and Fugitive)	Construction and Operation of the Waste Receiving and Processing Facility (DOH NOC ID 23)	AIR 02-703	7/22/02	Y ^{1B} (296-W-4); Y ⁴ (Table 5-6)
Waste Sampling and Characterization Facility (600 S-6266-001, 600 S-6266-002)	Use of Portable Tanks and Revised Source Term (DOH NOC ID 451)	AIR 02-1102	11/25/02	Y ^{1B} (696-W-1, 696-W-2)
Waste Sampling and Characterization Facility (600 J-NONPOINT 6265A, 600 J-NONPOINT 6266A, 600 J-NONPOINT 6267, 600 J-NONPOINT 6269)	Use of Portable Tanks and Revised Source Term (DOH NOC ID 451)	AIR 02-1102	11/25/02	Y ² ; Y ⁴ (Table 5-6)
PNNL				
305-B Building (300 EP-305B-01-S)	Dangerous and Radioactive Mixed Waste Storage Facility (305B Building) (DOH NOC ID 319)	AIR 02-1202	12/3/02	Y ^{1B} (EP-305B-01-S)
318 Building (300 EP-318-01-S)	Calibration and Development Activities in the Radiological Calibrations Laboratory (318 Building) (DOH NOC ID 532)	AIR 03-1204	12/8/03	Y ^{1B} (EP-318-01-S)
325 Building (300 EP-325-01-S)	Radiological Processing Laboratory (325 Building) (DOH NOC ID 552)	AIR 04-209	2/20/04	Y ^{1A} (EP-325-01-S)
326 Building (300 EP-326-01-S)	Research Activities in the Material Sciences Laboratory (326 Facility) (DOH NOC ID 495)	AIR 01-607	6/22/01	Y ^{1B} (EP-326-01-S)
329 Building (300 EP-329-01-S)	Research Activities in the Chemical Sciences Laboratory (329 Facility) (DOH NOC ID 584)	AIR 04-407	4/20/04	Y ^{1B} (EP-329-01-S)
331 Building (300 EP-331-01-V)	Research Activities in the Life Sciences Laboratory – I (331 Building) (DOH NOC ID 609)	AIR 04-1103	11/23/04	Y ^{1A} (EP-331-01-V)
Sitewide				
Sitewide HEPA Vacs (200 W-PORTEX 007)	HEPA Filtered Vacuum Radioactive Air Emission Units (DOH NOC ID 410)	AIR 03-1217	12/23/03	Y ² ; Y ⁶ (Table 5-2)
Sitewide Guzzler (Guzzler)	Categorical Guzzler Vacuum Excavation System for Radiologically Limited Activities on the Hanford Site (DOH NOC ID 328)	AIR 02-302	3/5/02	Y ² ; Y ⁵ (Table 5-3); Y ⁶
Sitewide PTRAEU (PTRAEU)	Portable/Temporary Radionuclide Airborne Emissions Units (DOH NOC ID 411)	AIR 02-1220	12/13/02	Y ² ; Y ⁶ (Table 5-1)
Sitewide Vented Containers (Vented Containers)	Sitewide Vented Container Storage (DOH NOC ID 188)	AIR 02-1215	12/31/02	Y ⁴ (Table 5-6)

5.4 AMBIENT AIR SAMPLING MEASUREMENTS

The near-facility monitoring (NFM) program comprises a comprehensive network of monitoring locations near facilities and projects at the Hanford Site. The program monitors soil, vegetation, and ambient air that may contain radionuclides dispersed there by onsite activities. It also uses thermoluminescent dosimeters to measure ambient dose rates. Emissions from many NOC activities are not measured directly at the source, as are emissions from forcibly ventilated stacks. Frequently, NOC activities are temporary and not conducted within the confines of structures having ventilation systems equipped with sampling or monitoring equipment. Hence, assessing emissions from these activities is not nearly as straightforward as is measuring stack emissions.

WDOH requires that emissions from NOC activities be measured periodically to confirm whether or not they are low. A variety of measurement data are used in this confirmation process, including those from the NFM program, dose-rate surveys, surface smears, CAM sampling, and both NDA and destructive analysis, especially of HEPA filters. Further confirmation methods are allowed, provided they are first approved by WDOH.

Summarized in Table 5-6 are the analytical data measured from ambient air samples collected during 2005, organized by general emission unit, which for regulatory purposes is construed as equivalent to an operations Area such as the 100, 200, 300, 400, or 600 Area. Radionuclides with concentrations that fell below analytical detection limits in both the first and second half of the semi-annual composite samples or the quarterly composite samples were not listed in the table.

Several ERC/RCC projects have requirements for annually reporting ambient air monitoring data obtained from samples collected at PNNL air monitoring stations. The PNNL stations in proximity to these projects are as follows: PNNL station "Yakima Barricade" is used for the 100-B/C, 100-F, 100-KR-1, and 100-NR-1 Remedial Action Projects; PNNL station "Wye Barricade" is used for the 100-F Remedial Action Project; PNNL station "200 West SE" is used for the ERDF Project; and PNNL stations "300 Trench," "300 NE," and "300 Water Intake" are used for the 300-FF-1&2 Remedial Action Project. Air monitoring data related to these locations are in Table 5-7.

PNNL also compiles ambient air monitoring data from samples collected near the 400 Area. Those data are presented in Table 5-8.

The following definitions apply to abbreviations and units of measure used in Tables 5-6 through 5-8:

- EDP = Electronic Data Processing (these alpha-numeric codes, such as "N467," serve as sampler location identifiers)
- "1st half," "2nd," "1st quarter," and so on refer to standard fractional periods of the calendar year
- 1 Ci = 1 curie = $3.7 \text{ E}+10$ becquerels (Bq)
- pCi = picocurie = $\text{E}-12$ Ci
- m^3 = cubic meter pCi/ m^3 = picocuries per cubic meter (pCi = $\text{E}-12$ curies)
- NA = not applicable (because up to 26 samples were analyzed each half year and up to 13 a quarter, but this table shows only a single isotopic result obtained for that period)
- ND = not detected (i.e., result less than zero, less than its overall analytical error, or no peak detected)

Table 5-6. Hanford Site Near-Facility Monitoring Air Sampling Results for 2005.

100 Area

100-B/C Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N464	gross α	NA	NA	1.1 E-03	2.4 E-03
	gross β	NA	NA	1.8 E-02	5.0 E-02
	²³⁴ U	5.2 E-06	1.3 E-05	9.2 E-06	1.3 E-05
	²³⁵ U	ND	7.2 E-06	7.2 E-06	7.2 E-06
	²³⁸ U	5.7 E-06	1.2 E-05	8.8 E-06	1.2 E-05
N465	gross α	NA	NA	1.5 E-03	3.5 E-03
	gross β	NA	NA	1.8 E-02	4.7 E-02
	²³⁴ U	6.3 E-06	1.2 E-05	8.9 E-06	1.2 E-05
	²³⁸ U	7.9 E-06	5.1 E-06	6.5 E-06	7.9 E-06
	^{239/240} Pu	4.4 E-06	ND	4.4 E-06	4.4 E-06
N466	gross α	NA	NA	1.4 E-03	2.8 E-03
	gross β	NA	NA	1.9 E-02	5.3 E-02
	⁹⁰ Sr	ND	1.7 E-04	1.7 E-04	1.7 E-04
	²³⁴ U	7.6 E-06	7.9 E-06	7.8 E-06	7.9 E-06
	²³⁸ U	8.3 E-06	7.9 E-06	8.1 E-06	8.3 E-06
N496	gross α	NA	NA	1.2 E-03	2.8 E-03
	gross β	NA	NA	1.8 E-02	4.9 E-02
	⁹⁰ Sr	1.5 E-04	ND	1.5 E-04	1.5 E-04
	²³⁴ U	5.9 E-06	1.0 E-05	8.2 E-06	1.0 E-05
	²³⁵ U	ND	5.0 E-06	5.0 E-06	5.0 E-06
	²³⁸ U	7.0 E-06	8.4 E-06	7.7 E-06	8.4 E-06
N497	gross α	NA	NA	1.3 E-03	3.7 E-03
	gross β	NA	NA	1.8 E-02	5.0 E-02
	⁹⁰ Sr	2.1 E-04	ND	2.1 E-04	2.1 E-04
	²³⁴ U	9.7 E-06	6.5 E-06	8.1 E-06	9.7 E-06
	²³⁵ U	ND	3.6 E-06	3.6 E-06	3.6 E-06
	²³⁸ U	8.3 E-06	ND	8.3 E-06	8.3 E-06
	²³⁸ Pu	ND	2.9 E-05	2.9 E-05	2.9 E-05
	^{239/240} Pu	ND	8.8 E-06	8.8 E-06	8.8 E-06

100-K Basins Closure Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N401	gross α	NA	NA	1.3 E-03	4.1 E-03
	gross β	NA	NA	1.8 E-02	6.4 E-02
	²³⁴ U	ND	2.2 E-05	2.2 E-05	2.2 E-05
	²³⁵ U	3.6 E-06	ND	3.6 E-06	3.6 E-06
	²³⁸ U	1.3 E-05	9.6 E-06	1.1 E-05	1.3 E-05
	^{239/240} Pu	2.6 E-05	ND	2.6 E-05	2.6 E-05
	²⁴¹ Am	ND	1.8 E-05	1.8 E-05	1.8 E-05
N402	gross α	NA	NA	1.5 E-03	4.1 E-03
	gross β	NA	NA	2.2 E-02	6.5 E-02
	⁹⁰ Sr	2.0 E-04	ND	2.0 E-04	2.0 E-04
	²³⁴ U	6.4 E-06	1.1 E-05	8.7 E-06	1.1 E-05
	²³⁸ U	3.8 E-06	5.2 E-06	4.5 E-06	5.2 E-06
	^{239/240} Pu	8.4 E-06	1.1 E-05	9.7 E-06	1.1 E-05
	N403	gross α	NA	NA	1.4 E-03
gross β		NA	NA	1.9 E-02	6.1 E-02
⁹⁰ Sr		1.7 E-04	ND	1.7 E-04	1.7 E-04
¹³⁷ Cs		1.3 E-04	ND	1.3 E-04	1.3 E-04
²³⁴ U		1.1 E-05	1.4 E-05	1.2 E-05	1.4 E-05
²³⁵ U		ND	7.5 E-06	7.5 E-06	7.5 E-06
²³⁸ U		9.3 E-06	1.0 E-05	9.8 E-06	1.0 E-05
^{239/240} Pu		ND	8.3 E-06	8.3 E-06	8.3 E-06
²⁴¹ Am		3.8 E-05	ND	3.8 E-05	3.8 E-05
N404	gross α	NA	NA	1.5 E-03	3.0 E-03
	gross β	NA	NA	2.0 E-02	6.4 E-02
	²³⁴ U	ND	1.1 E-05	1.1 E-05	1.1 E-05
	²³⁸ U	ND	6.2 E-06	6.2 E-06	6.2 E-06
N476	gross α	NA	NA	1.4 E-03	4.1 E-03
	gross β	NA	NA	2.0 E-02	7.1 E-02
	⁹⁰ Sr	2.2 E-04	ND	2.2 E-04	2.2 E-04
	²³⁴ U	7.9 E-06	1.5 E-05	1.2 E-05	1.5 E-05
	²³⁸ U	1.2 E-05	1.1 E-05	1.1 E-05	1.2 E-05
	²⁴¹ Am	ND	8.9 E-06	8.9 E-06	8.9 E-06

100-K Basins Closure Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N477	gross α	NA	NA	1.3 E-03	2.9 E-03
	gross β	NA	NA	2.0 E-02	7.0 E-02
	²³⁴ U	8.3 E-06	1.4 E-05	1.1 E-05	1.4 E-05
	²³⁵ U	ND	4.4 E-06	4.4 E-06	4.4 E-06
	²³⁸ U	9.7 E-06	6.4 E-06	8.1 E-06	9.7 E-06
	^{239/240} Pu	1.1 E-05	ND	1.1 E-05	1.1 E-05
N478	gross α	NA	NA	1.4 E-03	2.9 E-03
	gross β	NA	NA	2.2 E-02	7.1 E-02
	²³⁴ U	9.9 E-06	1.5 E-05	1.3 E-05	1.5 E-05
	²³⁸ U	7.3 E-06	1.0 E-05	8.8 E-06	1.0 E-05
	^{239/240} Pu	1.7 E-05	ND	1.7 E-05	1.7 E-05
	²⁴¹ Am	ND	1.5 E-05	1.5 E-05	1.5 E-05
N479	gross α	NA	NA	1.2 E-03	3.6 E-03
	gross β	NA	NA	1.9 E-02	5.5 E-02
	²³⁴ U	2.0 E-05	1.0 E-05	1.5 E-05	2.0 E-05
	²³⁵ U	1.2 E-05	ND	1.2 E-05	1.2 E-05
	²³⁸ U	8.3 E-06	7.9 E-06	8.1 E-06	8.3 E-06
	^{239/240} Pu	1.7 E-05	ND	1.7 E-05	1.7 E-05

100-KR-1 Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N528	gross α	NA	NA	1.3 E-03	4.0 E-03
	gross β	NA	NA	2.0 E-02	5.9 E-02
	⁹⁰ Sr	ND	8.5 E-04	8.5 E-04	8.5 E-04
	²³⁴ U	1.1 E-05	8.2 E-06	9.4 E-06	1.1 E-05
	²³⁸ U	6.9 E-06	8.2 E-06	7.5 E-06	8.2 E-06
	^{239/240} Pu	8.5 E-06	ND	8.5 E-06	8.5 E-06
N529	gross α	NA	NA	1.3 E-03	4.8 E-03
	gross β	NA	NA	2.0 E-02	6.7 E-02
	²³⁴ U	7.2 E-06	1.1 E-05	9.1 E-06	1.1 E-05
	²³⁸ U	7.2 E-06	ND	7.2 E-06	7.2 E-06
	^{239/240} Pu	8.6 E-06	1.4 E-05	1.1 E-05	1.4 E-05

100-KR-1 Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N530	gross α	NA	NA	1.3 E-03	3.0 E-03
	gross β	NA	NA	1.9 E-02	5.7 E-02
	²³⁴ U	1.0 E-05	7.1 E-06	8.7 E-06	1.0 E-05
	²³⁵ U	3.7 E-06	5.2 E-06	4.4 E-06	5.2 E-06
	²³⁸ U	7.6 E-06	1.1 E-05	9.1 E-06	1.1 E-05

118-K-1 Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N403	gross α	NA	NA	1.4 E-03	4.9 E-03
	gross β	NA	NA	1.9 E-02	6.1 E-02
	⁹⁰ Sr	1.7 E-04	ND	1.7 E-04	1.7 E-04
	¹³⁷ Cs	1.3 E-04	ND	1.3 E-04	1.3 E-04
	²³⁴ U	1.1 E-05	1.4 E-05	1.2 E-05	1.4 E-05
	²³⁵ U	ND	7.5 E-06	7.5 E-06	7.5 E-06
	²³⁸ U	9.3 E-06	1.0 E-05	9.8 E-06	1.0 E-05
	^{239/240} Pu	ND	8.3 E-06	8.3 E-06	8.3 E-06
	²⁴¹ Am	3.8 E-05	ND	3.8 E-05	3.8 E-05
N534	gross α	NA	NA	2.0 E-03	6.1 E-03
	gross β	NA	NA	3.3 E-02	7.8 E-02
	⁹⁰ Sr	ND	9.5 E-04	9.5 E-04	9.5 E-04
	²³⁸ U	ND	2.1 E-05	2.1 E-05	2.1 E-05
	^{239/240} Pu	ND	5.4 E-05	5.4 E-05	5.4 E-05
N535	gross α	NA	NA	2.5 E-03	7.5 E-03
	gross β	NA	NA	2.8 E-02	5.9 E-02
	⁹⁰ Sr	ND	6.4 E-04	6.4 E-04	6.4 E-04
	²³⁴ U	5.1 E-05	8.4 E-05	6.8 E-05	8.4 E-05
	²³⁸ U	ND	3.9 E-05	3.9 E-05	3.9 E-05

100-K Decontamination and Demolition Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N476	gross α	NA	NA	1.4 E-03	4.1 E-03
	gross β	NA	NA	2.0 E-02	7.1 E-02
	⁹⁰ Sr	2.2 E-04	ND	2.2 E-04	2.2 E-04
	²³⁴ U	7.9 E-06	1.5 E-05	1.2 E-05	1.5 E-05
	²³⁸ U	1.2 E-05	1.1 E-05	1.1 E-05	1.2 E-05
	²⁴¹ Am	ND	8.9 E-06	8.9 E-06	8.9 E-06
N477	gross α	NA	NA	2.5 E-03	7.5 E-03
	gross β	NA	NA	2.8 E-02	5.9 E-02
	⁹⁰ Sr	ND	6.4 E-04	6.4 E-04	6.4 E-04
	²³⁴ U	5.1 E-05	8.4 E-05	6.8 E-05	8.4 E-05
	²³⁸ U	ND	3.9 E-05	3.9 E-05	3.9 E-05

100-N D4 and Field Remediation Projects					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N102	gross α	NA	NA	1.4 E-03	3.9 E-03
	gross β	NA	NA	2.0 E-02	6.1 E-02
	⁶⁰ Co	2.4 E-04	ND	2.4 E-04	2.4 E-04
	⁹⁰ Sr	ND	2.0 E-04	2.0 E-04	2.0 E-04
	²³⁴ U	1.0 E-05	1.5 E-05	1.3 E-05	1.5 E-05
	²³⁸ U	5.2 E-06	9.4 E-06	7.3 E-06	9.4 E-06
	^{239/240} Pu	8.4 E-06	6.8 E-06	7.6 E-06	8.4 E-06
N103	gross α	NA	NA	1.4 E-03	3.5 E-03
	gross β	NA	NA	1.9 E-02	6.8 E-02
	⁶⁰ Co	1.8 E-04	2.8 E-04	2.3 E-04	2.8 E-04
	⁹⁰ Sr	1.4 E-04	ND	1.4 E-04	1.4 E-04
	²³⁴ U	9.1 E-06	1.1 E-05	9.9 E-06	1.1 E-05
	²³⁵ U	ND	4.7 E-06	4.7 E-06	4.7 E-06
	²³⁸ U	ND	9.4 E-06	9.4 E-06	9.4 E-06
²³⁸ Pu	ND	2.8 E-05	2.8 E-05	2.8 E-05	
N106	gross α	NA	NA	1.2 E-03	2.7 E-03
	gross β	NA	NA	1.9 E-02	6.3 E-02
	⁶⁰ Co	2.5 E-04	ND	2.5 E-04	2.5 E-04
	¹³⁷ Cs	ND	1.6 E-04	1.6 E-04	1.6 E-04
	²³⁴ U	8.4 E-06	7.2 E-06	7.8 E-06	8.4 E-06
	²³⁸ U	ND	8.7 E-06	8.7 E-06	8.7 E-06
	^{239/240} Pu	1.1 E-05	ND	1.1 E-05	1.1 E-05

100-N D4 and Field Remediation Projects					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N526	gross α	NA	NA	1.4 E-03	3.0 E-03
	gross β	NA	NA	2.1 E-02	5.8 E-02
	⁶⁰ Co	4.4 E-04	2.5 E-04	3.4 E-04	4.4 E-04
	¹³⁷ Cs	6.0 E-04	8.0 E-04	7.0 E-04	8.0 E-04
	²³⁴ U	ND	1.4 E-05	1.4 E-05	1.4 E-05
	²³⁸ U	7.8 E-06	6.3 E-06	7.1 E-06	7.8 E-06
	^{239/240} Pu	1.6 E-05	ND	1.6 E-05	1.6 E-05

105-D and 105-H Interim Safe Storage Projects							
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³					
		1st quarter	2nd quarter	3rd quarter	4th quarter	Average	Maximum
N492	gross α	NA	NA	NA	NA	1.4 E-03	2.1 E-03
	gross β	NA	NA	NA	NA	2.6 E-02	4.0 E-02
	²³⁸ U	1.1 E-05	ND	ND	ND	1.1 E-05	1.1 E-05
N523	gross α	NA	NA	NA	NA	1.7 E-03	2.8 E-03
	gross β	NA	NA	NA	NA	3.1 E-02	4.5 E-02
	²³⁴ U	1.7 E-05	ND	ND	ND	1.7 E-05	1.7 E-05
N524	gross α	NA	NA	NA	NA	1.2 E-03	3.6 E-03
	gross β	NA	NA	NA	NA	2.0 E-02	6.7 E-02
	⁹⁰ Sr	ND	ND	3.3 E-04	4.8 E-04	4.0 E-04	4.8 E-04
	¹³⁷ Cs	ND	ND	3.1 E-04	ND	3.1 E-04	3.1 E-04
	²³⁴ U	1.7 E-05	ND	1.7 E-05	2.4 E-05	2.0 E-05	2.4 E-05
	²³⁵ U	ND	ND	ND	1.7 E-05	1.7 E-05	1.7 E-05
	²³⁸ U	ND	9.2 E-06	1.7 E-05	1.9 E-05	1.5 E-05	1.9 E-05
	^{239/240} Pu	ND	1.5 E-05	ND	ND	1.5 E-05	1.5 E-05
N525	gross α	NA	NA	NA	NA	1.3 E-03	3.9 E-03
	gross β	NA	NA	NA	NA	2.1 E-02	6.4 E-02
	²³⁴ U	ND	1.6 E-05	1.5 E-05	4.6 E-05	2.6 E-05	4.6 E-05
	²³⁵ U	ND	ND	ND	9.6 E-06	9.6 E-06	9.6 E-06
	²³⁸ U	ND	1.0 E-05	1.9 E-05	2.1 E-05	1.7 E-05	2.1 E-05
	^{239/240} Pu	7.6 E-05	ND	ND	ND	7.6 E-05	7.6 E-05

100-F Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N519	gross α	NA	NA	1.1 E-03	3.1 E-03
	gross β	NA	NA	1.9 E-02	6.2 E-02
	¹³⁷ Cs	ND	1.2 E-04	1.2 E-04	1.2 E-04
	²³⁴ U	ND	1.5 E-05	1.5 E-05	1.5 E-05
	²³⁵ U	ND	4.7 E-06	4.7 E-06	4.7 E-06
	²³⁸ U	ND	1.3 E-05	1.3 E-05	1.3 E-05
N520	gross α	NA	NA	1.1 E-03	2.0 E-03
	gross β	NA	NA	1.7 E-02	6.4 E-02
	²³⁴ U	2.9 E-05	1.1 E-05	2.0 E-05	2.9 E-05
	²³⁵ U	ND	7.4 E-06	7.4 E-06	7.4 E-06
N521	gross α	NA	NA	1.3 E-03	3.6 E-03
	gross β	NA	NA	1.9 E-02	6.0 E-02
	²³⁴ U	ND	1.4 E-05	1.4 E-05	1.4 E-05
	²³⁵ U	ND	4.6 E-06	4.6 E-06	4.6 E-06
N552	gross α	NA	NA	1.6 E-03	3.7 E-03
	gross β	NA	NA	2.0 E-02	6.2 E-02
	²³⁴ U	ND	7.8 E-06	7.8 E-06	7.8 E-06
	²³⁸ U	ND	1.4 E-05	1.4 E-05	1.4 E-05
N553	gross α	NA	NA	1.4 E-03	3.9 E-03
	gross β	NA	NA	2.1 E-02	7.1 E-02
	²³⁴ U	ND	1.4 E-05	1.4 E-05	1.4 E-05
	²³⁸ U	ND	1.5 E-05	1.5 E-05	1.5 E-05
N558	gross α	NA	NA	1.3 E-03	1.4 E-03
	gross β	NA	NA	1.2 E-02	1.7 E-02
	⁶⁰ Co	7.5 E-04	ND	7.5 E-04	7.5 E-04

200 Areas

200 East Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N019	gross α	NA	NA	1.4 E-03	3.7 E-03
	gross β	NA	NA	1.8 E-02	7.5 E-02
	²³⁴ U	8.8 E-06	8.3 E-06	8.6 E-06	8.8 E-06
	²³⁸ U	ND	9.6 E-06	9.6 E-06	9.6 E-06
N158	gross α	NA	NA	1.4 E-03	4.6 E-03
	gross β	NA	NA	2.0 E-02	7.0 E-02
	¹³⁷ Cs	ND	9.9 E-04	9.9 E-04	9.9 E-04
	²³⁴ U	8.5 E-06	7.2 E-06	7.8 E-06	8.5 E-06
	²³⁸ U	6.9 E-06	1.2 E-05	9.6 E-06	1.2 E-05
N498	gross α	NA	NA	1.5 E-03	3.8 E-03
	gross β	NA	NA	1.8 E-02	5.9 E-02
	¹⁰⁶ Ru	8.6 E-04	ND	8.6 E-04	8.6 E-04
	²³⁴ U	ND	1.5 E-05	1.5 E-05	1.5 E-05
	²³⁸ U	9.4 E-06	1.7 E-05	1.3 E-05	1.7 E-05
N499	gross α	NA	NA	1.3 E-03	3.2 E-03
	gross β	NA	NA	2.0 E-02	6.8 E-02
	²³⁴ U	1.2 E-05	1.0 E-05	1.1 E-05	1.2 E-05
	²³⁵ U	ND	4.1 E-06	4.1 E-06	4.1 E-06
	²³⁸ U	9.0 E-06	ND	9.0 E-06	9.0 E-06
N957	gross α	NA	NA	1.5 E-03	4.6 E-03
	gross β	NA	NA	1.8 E-02	5.6 E-02
	²³⁴ U	1.1 E-05	ND	1.1 E-05	1.1 E-05
	²³⁸ U	8.0 E-06	9.8 E-06	8.9 E-06	9.8 E-06
N967	gross α	NA	NA	1.2 E-03	3.2 E-03
	gross β	NA	NA	1.8 E-02	6.1 E-02
	²³⁴ U	9.9 E-06	1.0 E-05	1.0 E-05	1.0 E-05
	²³⁸ U	8.4 E-06	1.0 E-05	9.4 E-06	1.0 E-05
	^{239/240} Pu	9.9 E-06	ND	9.9 E-06	9.9 E-06
N968	gross α	NA	NA	1.2 E-03	3.2 E-03
	gross β	NA	NA	1.9 E-02	6.4 E-02
	⁹⁰ Sr	ND	1.8 E-04	1.8 E-04	1.8 E-04
	²³⁴ U	1.0 E-05	1.4 E-05	1.2 E-05	1.4 E-05
	²³⁵ U	5.1 E-06	4.8 E-06	5.0 E-06	5.1 E-06
	²³⁸ U	9.5 E-06	ND	9.5 E-06	9.5 E-06

200 East Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N969	gross α	NA	NA	1.3 E-03	3.4 E-03
	gross β	NA	NA	1.9 E-02	7.2 E-02
	²³⁴ U	7.9 E-06	1.1 E-05	9.5 E-06	1.1 E-05
	²³⁵ U	4.0 E-06	ND	4.0 E-06	4.0 E-06
	²³⁸ U	1.1 E-05	1.0 E-05	1.0 E-05	1.1 E-05
	^{239/240} Pu	1.5 E-05	ND	1.5 E-05	1.5 E-05
N970	gross α	NA	NA	1.2 E-03	3.8 E-03
	gross β	NA	NA	1.7 E-02	5.7 E-02
	²³⁴ U	7.0 E-06	ND	7.0 E-06	7.0 E-06
	²³⁸ U	7.0 E-06	6.0 E-06	6.5 E-06	7.0 E-06
N972	gross α	NA	NA	1.3 E-03	3.7 E-03
	gross β	NA	NA	1.9 E-02	6.0 E-02
	²³⁴ U	6.3 E-06	1.1 E-05	8.5 E-06	1.1 E-05
	²³⁸ U	6.2 E-06	6.6 E-06	6.4 E-06	6.6 E-06
N973	gross α	NA	NA	1.3 E-03	2.8 E-03
	gross β	NA	NA	2.0 E-02	7.0 E-02
	²³⁴ U	1.1 E-05	7.7 E-06	9.5 E-06	1.1 E-05
	²³⁸ U	1.0 E-05	5.6 E-06	8.1 E-06	1.0 E-05
	^{239/240} Pu	ND	4.0 E-06	4.0 E-06	4.0 E-06
N976	gross α	NA	NA	1.0 E-03	1.7 E-03
	gross β	NA	NA	1.5 E-02	3.7 E-02
	¹³⁷ Cs	ND	2.1 E-04	2.1 E-04	2.1 E-04
	²³⁴ U	2.0 E-05	2.4 E-05	2.2 E-05	2.4 E-05
	²³⁵ U	4.3 E-06	ND	4.3 E-06	4.3 E-06
	²³⁸ U	2.1 E-05	1.9 E-05	2.0 E-05	2.1 E-05
N977	gross α	NA	NA	1.2 E-03	2.7 E-03
	gross β	NA	NA	1.8 E-02	5.9 E-02
	²³⁴ U	1.8 E-05	2.2 E-05	2.0 E-05	2.2 E-05
	²³⁵ U	ND	4.7 E-06	4.7 E-06	4.7 E-06
	²³⁸ U	1.0 E-05	1.4 E-05	1.2 E-05	1.4 E-05
	^{239/240} Pu	ND	5.4 E-05	5.4 E-05	5.4 E-05
N978	gross α	NA	NA	1.2 E-03	2.6 E-03
	gross β	NA	NA	1.9 E-02	6.2 E-02
	²³⁴ U	6.8 E-06	3.3 E-05	2.0 E-05	3.3 E-05
	²³⁵ U	5.2 E-06	1.0 E-05	7.7 E-06	1.0 E-05
	²³⁸ U	6.8 E-06	2.9 E-05	1.8 E-05	2.9 E-05

200 East Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N984	gross α	NA	NA	1.5 E-03	3.4 E-03
	gross β	NA	NA	2.0 E-02	6.1 E-02
	⁶⁰ Co	ND	1.4 E-04	1.4 E-04	1.4 E-04
	⁹⁰ Sr	1.8 E-04	3.5 E-04	2.7 E-04	3.5 E-04
	¹³⁷ Cs	2.1 E-04	9.2 E-04	5.6 E-04	9.2 E-04
	²³⁴ U	7.9 E-06	2.3 E-05	1.6 E-05	2.3 E-05
	²³⁸ U	ND	2.3 E-05	2.3 E-05	2.3 E-05
	^{239/240} Pu	3.7 E-06	7.2 E-05	3.8 E-05	7.2 E-05
N985	gross α	NA	NA	1.2 E-03	2.6 E-03
	gross β	NA	NA	1.7 E-02	4.4 E-02
	⁹⁰ Sr	ND	5.0 E-04	5.0 E-04	5.0 E-04
	²³⁴ U	1.2 E-05	2.1 E-05	1.7 E-05	2.1 E-05
	²³⁵ U	ND	5.8 E-06	5.8 E-06	5.8 E-06
	²³⁸ U	1.7 E-05	1.7 E-05	1.7 E-05	1.7 E-05
N999	gross α	NA	NA	1.3 E-03	2.4 E-03
	gross β	NA	NA	1.7 E-02	4.7 E-02
	⁹⁰ Sr	ND	1.4 E-04	1.4 E-04	1.4 E-04
	²³⁴ U	7.3 E-06	1.9 E-05	1.3 E-05	1.9 E-05
	²³⁵ U	ND	5.5 E-06	5.5 E-06	5.5 E-06
	²³⁸ U	1.3 E-05	1.4 E-05	1.4 E-05	1.4 E-05
	^{239/240} Pu	ND	5.8 E-05	5.8 E-05	5.8 E-05

Canister Storage Building (200 East Area)					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N480	gross α	NA	NA	1.2 E-03	2.1 E-03
	gross β	NA	NA	1.7 E-02	5.0 E-02
	²³⁴ U	1.1 E-05	ND	1.1 E-05	1.1 E-05
	²³⁵ U	5.5 E-06	4.0 E-06	4.7 E-06	5.5 E-06
	²³⁸ U	8.5 E-06	1.2 E-05	1.0 E-05	1.2 E-05
N481	gross α	NA	NA	1.4 E-03	4.6 E-03
	gross β	NA	NA	2.0 E-02	7.9 E-02
	²³⁴ U	1.2 E-05	1.5 E-05	1.3 E-05	1.5 E-05
	²³⁵ U	5.6 E-06	ND	5.6 E-06	5.6 E-06
	²³⁸ U	1.3 E-05	7.3 E-06	1.0 E-05	1.3 E-05

200 West Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N155	gross α	NA	NA	1.2 E-03	3.4 E-03
	gross β	NA	NA	1.8 E-02	6.3 E-02
	²³⁴ U	1.4 E-05	ND	1.4 E-05	1.4 E-05
	²³⁸ U	1.4 E-05	6.7 E-06	1.0 E-05	1.4 E-05
N161	gross α	NA	NA	1.5 E-03	4.9 E-03
	gross β	NA	NA	1.7 E-02	6.0 E-02
	⁹⁰ Sr	1.6 E-04	ND	1.6 E-04	1.6 E-04
	²³⁴ U	7.1 E-06	7.6 E-06	7.4 E-06	7.6 E-06
	²³⁸ U	4.7 E-06	ND	4.7 E-06	4.7 E-06
	^{239/240} Pu	ND	6.8 E-06	6.8 E-06	6.8 E-06
N165	gross α	NA	NA	1.5 E-03	2.7 E-03
	gross β	NA	NA	1.7 E-02	5.1 E-02
	⁹⁰ Sr	ND	1.6 E-04	1.6 E-04	1.6 E-04
	²³⁴ U	1.3 E-05	1.5 E-05	1.4 E-05	1.5 E-05
	²³⁸ U	8.0 E-06	9.1 E-06	8.5 E-06	9.1 E-06
	^{239/240} Pu	4.4 E-04	3.8 E-04	4.1 E-04	4.4 E-04
N168	gross α	NA	NA	1.3 E-03	3.3 E-03
	gross β	NA	NA	1.8 E-02	6.7 E-02
	²³⁴ U	3.0 E-05	2.6 E-05	2.8 E-05	3.0 E-05
	²³⁵ U	ND	5.8 E-06	5.8 E-06	5.8 E-06
	²³⁸ U	2.2 E-05	3.3 E-05	2.8 E-05	3.3 E-05
	^{239/240} Pu	ND	6.1 E-06	6.1 E-06	6.1 E-06
N200	gross α	NA	NA	1.2 E-03	3.0 E-03
	gross β	NA	NA	1.8 E-02	6.8 E-02
	²³⁴ U	7.3 E-06	8.4 E-06	7.8 E-06	8.4 E-06
	²³⁵ U	ND	4.2 E-06	4.2 E-06	4.2 E-06
	²³⁸ U	6.9 E-06	1.7 E-05	1.2 E-05	1.7 E-05
N304	gross α	NA	NA	1.5 E-03	3.2 E-03
	gross β	NA	NA	1.9 E-02	6.1 E-02
	²³⁴ U	1.2 E-05	8.5 E-06	1.0 E-05	1.2 E-05
	²³⁸ U	1.0 E-05	ND	1.0 E-05	1.0 E-05
	^{239/240} Pu	9.4 E-06	ND	9.4 E-06	9.4 E-06
N433	gross α	NA	NA	1.3 E-03	2.5 E-03
	gross β	NA	NA	1.8 E-02	5.4 E-02
	²³⁴ U	1.1 E-05	1.5 E-05	1.3 E-05	1.5 E-05
	²³⁸ U	1.2 E-05	9.0 E-06	1.1 E-05	1.2 E-05
	^{239/240} Pu	1.0 E-04	ND	1.0 E-04	1.0 E-04

200 West Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N441	gross α	NA	NA	1.3 E-03	3.8 E-03
	gross β	NA	NA	1.9 E-02	5.8 E-02
	¹³⁷ Cs	ND	1.3 E-04	1.3 E-04	1.3 E-04
	²³⁴ U	ND	7.1 E-06	7.1 E-06	7.1 E-06
N442	gross α	NA	NA	1.3 E-03	3.0 E-03
	gross β	NA	NA	1.8 E-02	4.8 E-02
	²³⁴ U	1.3 E-05	1.8 E-05	1.5 E-05	1.8 E-05
	²³⁵ U	ND	4.9 E-06	4.9 E-06	4.9 E-06
	²³⁸ U	7.9 E-06	9.9 E-06	8.9 E-06	9.9 E-06
N449	gross α	NA	NA	1.3 E-03	2.7 E-03
	gross β	NA	NA	1.8 E-02	4.1 E-02
	²³⁴ U	9.8 E-06	8.2 E-06	9.0 E-06	9.8 E-06
	²³⁸ U	1.0 E-05	ND	1.0 E-05	1.0 E-05
	^{239/240} Pu	6.3 E-06	ND	6.3 E-06	6.3 E-06
N456	gross α	NA	NA	1.4 E-03	3.3 E-03
	gross β	NA	NA	1.9 E-02	5.8 E-02
	²³⁴ U	1.4 E-05	2.6 E-05	2.0 E-05	2.6 E-05
	²³⁸ U	1.0 E-05	1.9 E-05	1.4 E-05	1.9 E-05
N457	gross α	NA	NA	1.4 E-03	3.1 E-03
	gross β	NA	NA	1.9 E-02	6.1 E-02
	²³⁴ U	9.3 E-06	6.3 E-06	7.8 E-06	9.3 E-06
	²³⁵ U	3.7 E-06	ND	3.7 E-06	3.7 E-06
	²³⁸ U	8.6 E-06	8.9 E-06	8.8 E-06	8.9 E-06
	^{239/240} Pu	6.4 E-06	ND	6.4 E-06	6.4 E-06
N554	gross α	NA	NA	1.3 E-03	3.3 E-03
	gross β	NA	NA	1.5 E-02	6.2 E-02
	²³⁴ U	2.4 E-05	1.4 E-05	1.9 E-05	2.4 E-05
	²³⁵ U	ND	3.9 E-06	3.9 E-06	3.9 E-06
	²³⁸ U	1.8 E-05	1.4 E-05	1.6 E-05	1.8 E-05
	^{239/240} Pu	ND	7.0 E-06	7.0 E-06	7.0 E-06
N555	gross α	NA	NA	1.2 E-03	3.3 E-03
	gross β	NA	NA	1.7 E-02	6.2 E-02
	⁹⁰ Sr	ND	1.9 E-04	1.9 E-04	1.9 E-04
	²³⁴ U	ND	1.1 E-05	1.1 E-05	1.1 E-05
	^{239/240} Pu	ND	2.0 E-05	2.0 E-05	2.0 E-05

200 West Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N956	gross α	NA	NA	1.3 E-03	3.1 E-03
	gross β	NA	NA	1.9 E-02	4.9 E-02
	⁹⁰ Sr	ND	1.5 E-04	1.5 E-04	1.5 E-04
	¹³⁷ Cs	2.0 E-04	3.2 E-04	2.6 E-04	3.2 E-04
	²³⁴ U	8.2 E-06	ND	8.2 E-06	8.2 E-06
	²³⁸ U	9.0 E-06	1.1 E-05	9.8 E-06	1.1 E-05
N963	gross α	NA	NA	1.4 E-03	3.2 E-03
	gross β	NA	NA	1.8 E-02	4.5 E-02
	²³⁴ U	1.0 E-05	1.3 E-05	1.2 E-05	1.3 E-05
	²³⁸ U	4.4 E-06	6.2 E-06	5.3 E-06	6.2 E-06
N964	gross α	NA	NA	1.2 E-03	2.3 E-03
	gross β	NA	NA	1.7 E-02	5.2 E-02
	²³⁴ U	8.6 E-06	1.8 E-05	1.3 E-05	1.8 E-05
	²³⁸ U	ND	1.4 E-05	1.4 E-05	1.4 E-05
N965	gross α	NA	NA	1.4 E-03	3.7 E-03
	gross β	NA	NA	1.7 E-02	5.4 E-02
	²³⁴ U	ND	1.1 E-05	1.1 E-05	1.1 E-05
	²³⁵ U	4.3 E-06	ND	4.3 E-06	4.3 E-06
	²³⁸ U	7.0 E-06	8.6 E-06	7.8 E-06	8.6 E-06
N966	gross α	NA	NA	1.3 E-03	3.5 E-03
	gross β	NA	NA	1.8 E-02	5.8 E-02
	²³⁴ U	7.7 E-06	1.0 E-05	9.0 E-06	1.0 E-05
	²³⁸ U	7.7 E-06	1.0 E-05	9.0 E-06	1.0 E-05
	^{239/240} Pu	ND	8.5 E-06	8.5 E-06	8.5 E-06
N974	gross α	NA	NA	1.2 E-03	2.6 E-03
	gross β	NA	NA	1.8 E-02	5.2 E-02
	²³⁴ U	ND	8.2 E-06	8.2 E-06	8.2 E-06
	²³⁸ U	7.0 E-06	5.4 E-06	6.2 E-06	7.0 E-06
N975	gross α	NA	NA	1.3 E-03	3.8 E-03
	gross β	NA	NA	1.7 E-02	5.1 E-02
	²³⁴ U	8.7 E-06	8.1 E-06	8.4 E-06	8.7 E-06
	²³⁵ U	ND	4.0 E-06	4.0 E-06	4.0 E-06
	²³⁸ U	1.1 E-05	1.2 E-05	1.2 E-05	1.2 E-05
	^{239/240} Pu	2.4 E-05	1.9 E-05	2.1 E-05	2.4 E-05

200 West Area					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N987	gross α	NA	NA	1.2 E-03	3.1 E-03
	gross β	NA	NA	2.0 E-02	5.7 E-02
	²³⁴ U	ND	3.0 E-05	3.0 E-05	3.0 E-05
	²³⁵ U	ND	1.9 E-05	1.9 E-05	1.9 E-05
	²³⁸ U	ND	1.6 E-05	1.6 E-05	1.6 E-05
	^{239/240} Pu	ND	4.3 E-05	4.3 E-05	4.3 E-05
N994	gross α	NA	NA	1.3 E-03	2.9 E-03
	gross β	NA	NA	1.8 E-02	5.5 E-02
	¹⁰⁶ Ru	1.0 E-03	ND	1.0 E-03	1.0 E-03
	²³⁴ U	1.1 E-05	1.3 E-05	1.2 E-05	1.3 E-05
	²³⁵ U	4.1 E-06	ND	4.1 E-06	4.1 E-06
	²³⁸ U	8.2 E-06	1.1 E-05	9.6 E-06	1.1 E-05

Environmental Restoration Disposal Facility					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N482	gross α	NA	NA	1.2 E-03	3.4 E-03
	gross β	NA	NA	1.7 E-02	6.1 E-02
	⁹⁰ Sr	ND	2.3 E-04	2.3 E-04	2.3 E-04
	²³⁴ U	1.9 E-05	1.3 E-05	1.6 E-05	1.9 E-05
	²³⁸ U	1.5 E-05	7.1 E-06	1.1 E-05	1.5 E-05
N517	gross α	NA	NA	1.2 E-03	2.7 E-03
	gross β	NA	NA	1.8 E-02	6.0 E-02
	¹³⁷ Cs	ND	2.6 E-04	2.6 E-04	2.6 E-04
	²³⁴ U	2.9 E-05	1.2 E-05	2.1 E-05	2.9 E-05
	²³⁵ U	ND	3.7 E-06	3.7 E-06	3.7 E-06
	²³⁸ U	3.2 E-05	1.4 E-05	2.3 E-05	3.2 E-05
N518	^{239/240} Pu	8.0 E-06	1.1 E-05	9.6 E-06	1.1 E-05
	gross α	NA	NA	1.2 E-03	2.5 E-03
	gross β	NA	NA	1.7 E-02	6.6 E-02
	²³⁴ U	2.0 E-05	1.3 E-05	1.6 E-05	2.0 E-05
	²³⁵ U	7.8 E-06	ND	7.8 E-06	7.8 E-06
	²³⁸ U	1.5 E-05	1.1 E-05	1.3 E-05	1.5 E-05
	^{239/240} Pu	ND	3.8 E-06	3.8 E-06	3.8 E-06

Environmental Restoration Disposal Facility					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N963	gross α	NA	NA	1.4 E-03	3.2 E-03
	gross β	NA	NA	1.8 E-02	4.5 E-02
	²³⁴ U	1.0 E-05	1.3 E-05	1.2 E-05	1.3 E-05
	²³⁸ U	4.4 E-06	6.2 E-06	5.3 E-06	6.2 E-06

"U" Ancillary Facility Demolition Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N168	gross α	NA	NA	1.3 E-03	3.3 E-03
	gross β	NA	NA	1.8 E-02	6.7 E-02
	²³⁴ U	3.0 E-05	2.6 E-05	2.8 E-05	3.0 E-05
	²³⁵ U	ND	5.8 E-06	5.8 E-06	5.8 E-06
	²³⁸ U	2.2 E-05	3.3 E-05	2.8 E-05	3.3 E-05
	^{239/240} Pu	ND	6.1 E-06	6.1 E-06	6.1 E-06
N550	gross α	NA	NA	1.3 E-03	2.9 E-03
	gross β	NA	NA	1.9 E-02	6.0 E-02
	²³⁴ U	3.0 E-05	3.0 E-05	3.0 E-05	3.0 E-05
	²³⁸ U	2.1 E-05	3.0 E-05	2.5 E-05	3.0 E-05
N551	gross α	NA	NA	1.3 E-03	2.9 E-03
	gross β	NA	NA	1.7 E-02	4.5 E-02
	⁹⁰ Sr	ND	6.6 E-04	6.6 E-04	6.6 E-04
	¹³⁷ Cs	ND	4.0 E-04	4.0 E-04	4.0 E-04
	²³⁴ U	2.4 E-05	6.3 E-05	4.3 E-05	6.3 E-05
	²³⁵ U	5.0 E-06	9.7 E-06	7.4 E-06	9.7 E-06
	²³⁸ U	2.6 E-05	4.6 E-05	3.6 E-05	4.6 E-05
	^{239/240} Pu	ND	1.9 E-05	1.9 E-05	1.9 E-05

Integrated Disposal Facility (200 East Area)					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N532	gross α	NA	NA	1.3 E-03	2.7 E-03
	gross β	NA	NA	1.9 E-02	4.3 E-02
	⁹⁰ Sr	ND	2.2 E-04	2.2 E-04	2.2 E-04
	²³⁴ U	1.2 E-05	1.7 E-05	1.5 E-05	1.7 E-05
	²³⁸ U	7.5 E-06	1.6 E-05	1.2 E-05	1.6 E-05

300 Area

300-FF-2 Field Remediation Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N130	gross α	NA	NA	1.5 E-03	4.8 E-03
	gross β	NA	NA	2.0 E-02	8.1 E-02
	²³⁴ U	ND	1.5 E-05	1.5 E-05	1.5 E-05
	²³⁸ U	4.6 E-06	2.1 E-05	1.3 E-05	2.1 E-05
N527	gross α	NA	NA	1.2 E-03	2.3 E-03
	gross β	NA	NA	1.7 E-02	4.6 E-02
	²³⁴ U	1.1 E-05	2.1 E-05	1.6 E-05	2.1 E-05
	²³⁵ U	ND	8.8 E-06	8.8 E-06	8.8 E-06
	²³⁸ U	6.8 E-06	1.3 E-05	9.9 E-06	1.3 E-05
N546	gross α	NA	NA	3.6 E-03	4.5 E-03
	gross β	NA	NA	6.5 E-02	8.1 E-02
	²³⁴ U	8.0 E-05	ND	8.0 E-05	8.0 E-05
	²³⁸ U	6.2 E-05	ND	6.2 E-05	6.2 E-05
N547	gross α	NA	NA	2.8 E-03	2.9 E-03
	gross β	NA	NA	5.4 E-02	6.0 E-02
N548	gross α	NA	NA	1.4 E-03	1.4 E-03
	gross β	NA	NA	9.8 E-03	1.4 E-02
	²³⁴ U	1.7 E-04	ND	1.7 E-04	1.7 E-04
	²³⁵ U	1.3 E-04	ND	1.3 E-04	1.3 E-04
	²³⁸ U	1.5 E-04	ND	1.3 E-04	1.5 E-04
	^{239/240} Pu	6.2 E-04	ND	6.2 E-04	6.2 E-04
N549	gross α	NA	NA	6.0 E-04	6.0 E-04
	gross β	NA	NA	1.1 E-02	1.5 E-02
	²³⁴ U	1.4 E-04	ND	1.4 E-04	1.4 E-04
	²³⁵ U	3.7 E-05	ND	3.7 E-05	3.7 E-05
	²³⁸ U	5.6 E-05	ND	5.6 E-05	5.6 E-05

300 Area Decontamination and Demolition Project					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N557	gross α	NA	NA	1.6 E-03	7.3 E-03
	gross β	NA	NA	1.7 E-02	6.4 E-02
	²³⁴ U	4.5 E-05	1.3 E-05	5.1 E-05	1.1 E-04
	²³⁸ U	2.3 E-05	2.7 E-05	2.5 E-05	2.7 E-05
	^{239/240} Pu	3.9 E-05	ND	3.9 E-05	3.9 E-05

Wye Barricade					
EDP code	Radionuclide or type of radioactivity	Concentration, pCi/m ³			
		1st half	2nd half	Average	Maximum
N981	gross α	NA	NA	1.3 E-03	3.1 E-03
	gross β	NA	NA	1.8 E-02	6.5 E-02
	²³⁴ U	1.7 E-05	1.2 E-05	1.5 E-05	1.7 E-05
	²³⁵ U	ND	1.1 E-05	1.1 E-05	1.1 E-05
	²³⁸ U	2.1 E-05	8.8 E-06	1.5 E-05	2.1 E-05
	^{239/240} Pu	ND	1.2 E-05	1.2 E-05	1.2 E-05

100, 200, 300, and 600 Areas

Table 5-7. Pacific Northwest National Laboratory Supplemental Air Data for Environmental Restoration Contract Projects during 2005

Location	Radionuclide or type of radioactivity	Concentration, pCi/m ³	
		Average	Maximum
100-B	³ H	5.1 E+00	2.0 E+01
100-B SE	³ H	1.5 E+00	3.2 E+00
100-K Area	gross α	7.9 E-04	1.4 E-03
	gross β	1.7 E-02	6.3 E-02
	³ H	1.5 E+00	3.4 E+00
200-W SE	gross α	8.5 E-04	2.8 E-03
	gross β	1.7 E-02	4.8 E-02
	²³⁸ U	1.3 E-05	2.1 E-05
	^{239/240} Pu	4.6 E-06	4.6 E-06

Table 5-7. Pacific Northwest National Laboratory Supplemental Air Data
for Environmental Restoration Contract Projects during 2005

Location	Radionuclide or type of radioactivity	Concentration, pCi/m ³	
		Average	Maximum
300 NE	gross α	7.1 E-04	2.1 E-03
	gross β	1.9 E-02	7.5 E-02
	³ H	2.5 E+00	5.1 E+00
	²³⁸ U	2.2 E-05	4.6 E-05
	²³⁸ Pu	4.3 E-06	4.3 E-06
	^{239/240} Pu	6.1 E-05	1.0 E-04
300 South Gate	gross α	7.8 E-04	1.4 E-03
	gross β	1.8 E-02	7.4 E-02
	³ H	2.2 E+00	4.0 E+00
300 Trench	gross α	8.3 E-04	1.8 E-03
	gross β	1.9 E-02	7.0 E-02
	³ H	2.3 E+00	4.0 E+00
	²³⁸ U	7.8 E-05	1.2 E-04
	^{239/240} Pu	1.1 E-05	1.9 E-05
300 Water Intake	gross α	6.9 E-04	1.3 E-03
	gross β	1.9 E-02	7.4 E-02
	³ H	1.9 E+00	3.6 E+00
WYE Barricade	gross α	7.9 E-04	1.8 E-03
	gross β	1.8 E-02	6.5 E-02
	²³⁸ U	1.3 E-05	1.8 E-05
Yakima Barricade	gross α	7.9 E-04	2.8 E-03
	gross β	1.7 E-02	6.3 E-02

400 Area

Table 5-8. Pacific Northwest National Laboratory Supplemental Air Data
for the Fast Flux Test Facility (400 Area) during 2005

Location	Radionuclide or type of radioactivity	Concentration, pCi/m ³	
		Average	Maximum
400 E	gross α	9.6 E-04	6.3 E-03
	gross β	2.1 E-02	1.4 E-01
	³ H	1.6 E+00	3.5 E+00
400 N	gross α	7.5 E-04	2.2 E-03
	gross β	1.8 E-02	6.8 E-02
400 S	gross α	7.8 E-04	1.8 E-03
	gross β	1.8 E-02	6.5 E-02
400 W	gross α	7.7 E-04	1.4 E-03
	gross β	1.8 E-02	7.2 E-02

5.5 QUALITY ASSURANCE PROGRAM COMPLIANCE STATUS

Air emissions data reported in this document reflect the product of many quality assurance (QA) activities concerned with the collecting, handling, analyzing, validating, and reporting of samples and the resultant analytical data. These activities are identified in the quality assurance plans cited below. In addition, point-by-point comparisons of the major point source monitoring systems and laboratory methods to the quality assurance criteria of 40 CFR 61, Appendix B, Method 114, are detailed in the appropriate QA plan, below. PNNL was not required to perform point-by-point comparisons because their major stacks had been upgraded to full compliance status.

- BHI-QA-03/WCH-QA-03. 2000. *Quality Assurance Project Plan for Radiological Air Emissions Monitoring*, Section 6.1. Bechtel Hanford, Inc., and Washington Closure Hanford, LLC, Richland, Washington.
- DTS-OEM-PLN-003, Rev. 0 (formerly HNF-EP-0538-9). 2005. *Near-Facility Environmental Monitoring Quality Assurance Project Plan*. Duratek Northwest, Richland, Washington.
- HNF-EP-0528, Rev. 6. 2005. *NESHAP Quality Assurance Project Plan for Radioactive Air Emissions*, Fluor Hanford, Richland, Washington.
- RPP-QAPP-004. 2001. *NESHAP Quality Assurance Program Plan for Tank Farm Contractor Radionuclide Air Emissions*. CH2M HILL Hanford Group, Inc., Richland, Washington.

The effluent monitoring quality assurance programs described by the above plans are based upon one or more of the following documents:

- 10 CFR 830, *Nuclear Safety Management*.
- 40 CFR 61, Appendix B, "Method 114 — Test Methods for Measuring Radionuclide Emissions from Stationary Sources."
- ASME NQA-1-1997, *Quality Assurance Requirements for Nuclear Facility Application*.
- DOE O 414.1A, *Quality Assurance*, "Contractor Requirements Document."
- DOE 450.1, *Environmental Protection Program*.
- DOE Order 5400.5, *Radiation Protection of the Public and the Environment*.
- DOE/EH-0173T, *Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance*, (DOE 1991).
- *EPA Requirements for Quality Assurance Project Plans (QA/R-5)*.

This page intentionally left blank.

6.0 REFERENCES

- 00-05-006. 2001. *Hanford Site Air Operating Permit*. Washington State Department of Ecology, Olympia, Washington.
- 10 CFR 830, *Nuclear Safety Management*.
- ASME. 1997. *Quality Assurance Requirements for Nuclear Facility Application*, NQA-1-1997, New York.
- DOE. 1995. Letter, Raymond Berube, U.S. DOE, to E. Ramona Travato, U.S. EPA, "Memorandum of Understanding Between the U.S. Environmental Protection Agency and the U.S. Department of Energy Concerning the Clean Air Act Emission Standards for Radionuclides 40 CFR Part 61 Including Subparts H, I, Q & T," May 16, 1995. U.S. Department of Energy and U.S. Environmental Protection Agency, Washington, D.C.
- DOE Order 231.1, *Environment, Safety and Health Reporting*, U.S. Department of Energy, Washington, D.C.
- DOE Order 414.1A, *Quality Assurance*, "Contractor Requirements Document," U.S. Department of Energy-Richland Operations Office, Richland, Washington.
- DOE Order 450.1, *Environmental Protection Program*, U.S. Department of Energy, Washington, D.C.
- DOE Order 5400.5, *Radiation Protection of the Public and the Environment*, U.S. Department of Energy, Washington, D.C.
- DOE/EH-0173T. 1991. *Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance*, U.S. Department of Energy, Washington D.C.
- DOE/RL-88-30, Rev. 13. 2004. *Hanford Site Waste Management Units Report*, U.S. Department of Energy-Richland Operations Office, Richland, Washington.
- DOE/RL-2005-06. 2004. *Radionuclide Air Emissions Report for the Hanford Site, Calendar Year 2004*, U.S. Department of Energy-Richland Operations Office, Richland, Washington.
- EPA. 1992. *User's Guide for CAP88-PC, Version 1.0*. EPA 402-B-92-001. U.S. Environmental Protection Agency, Office of Radiation Programs, Las Vegas, Nevada.
- EPA QA/R-5. 2001. *EPA Requirements for Quality Assurance Project Plans*, U.S. Environmental Protection Agency, Washington, D.C.
- HNF-1974-1. 2002. *Radionuclide National Emission Standards for Hazardous Air Pollutants Potential-to-Emit Assessment*. Fluor Hanford, Inc., Richland, Washington.
- HNF-3602-1. 2002. *Unit Dose Conversion Factors to Calculate Doses for NOCs and FEMPs*. Fluor Hanford, Richland, Washington.
- PNL-3777, Rev. 2. 1993. *Recommended Environmental Dose Calculation Methods and Hanford-Specific Parameters*, Pacific Northwest Laboratory, Richland, Washington.

- PNNL-6415, Rev. 15. 2000. *Hanford Site National Environmental Policy Act (NEPA) Characterization*, Pacific Northwest National Laboratory, Richland, Washington.
- PNL-6584. 1988. *GENII — The Hanford Environmental Radiation Dosimetry Software System*, Vols. 1-3. Pacific Northwest Laboratory, Richland, Washington.
- PNL-7346. 1990. *Hanford Site Environmental Report for Calendar Year 1989*. Pacific Northwest Laboratory, Richland, Washington.
- PNNL-14428. 2004. *Hanford Area 2000 Population*. Pacific Northwest National Laboratory, Richland, Washington.
- PNNL-15160. 2005. *Hanford Site Climatological Data Summary 2004 with Historical Data*. Pacific Northwest National Laboratory, Richland, Washington.
- PNNL-15892. 2005. *Hanford Site Environmental Report for Calendar Year 2005*. Pacific Northwest National Laboratory, Richland, Washington.
- PNNL-15892, APP. 1. 2005. *Hanford Site Environmental Surveillance Data Report for Calendar Year 2005*. Pacific Northwest National Laboratory, Richland, Washington.
- PNNL-15892, APP. 2. 2005. *Hanford Site Near-Facility Environmental Monitoring Data Report for Calendar Year 2005*. Pacific Northwest National Laboratory, Richland, Washington.
- SAND91-0561A. 1991. *User's Guide for GENII-S: A Code for Statistical and Deterministic Simulations of Radiation Doses to Humans from Radionuclides in the Environment*. Sandia National Laboratories, Albuquerque, New Mexico.
- WAC 246-247, "Radiation Protection — Air Emissions."

APPENDIX A

DOSE MODELING AND METEOROLOGICAL DATA

This page intentionally left blank.


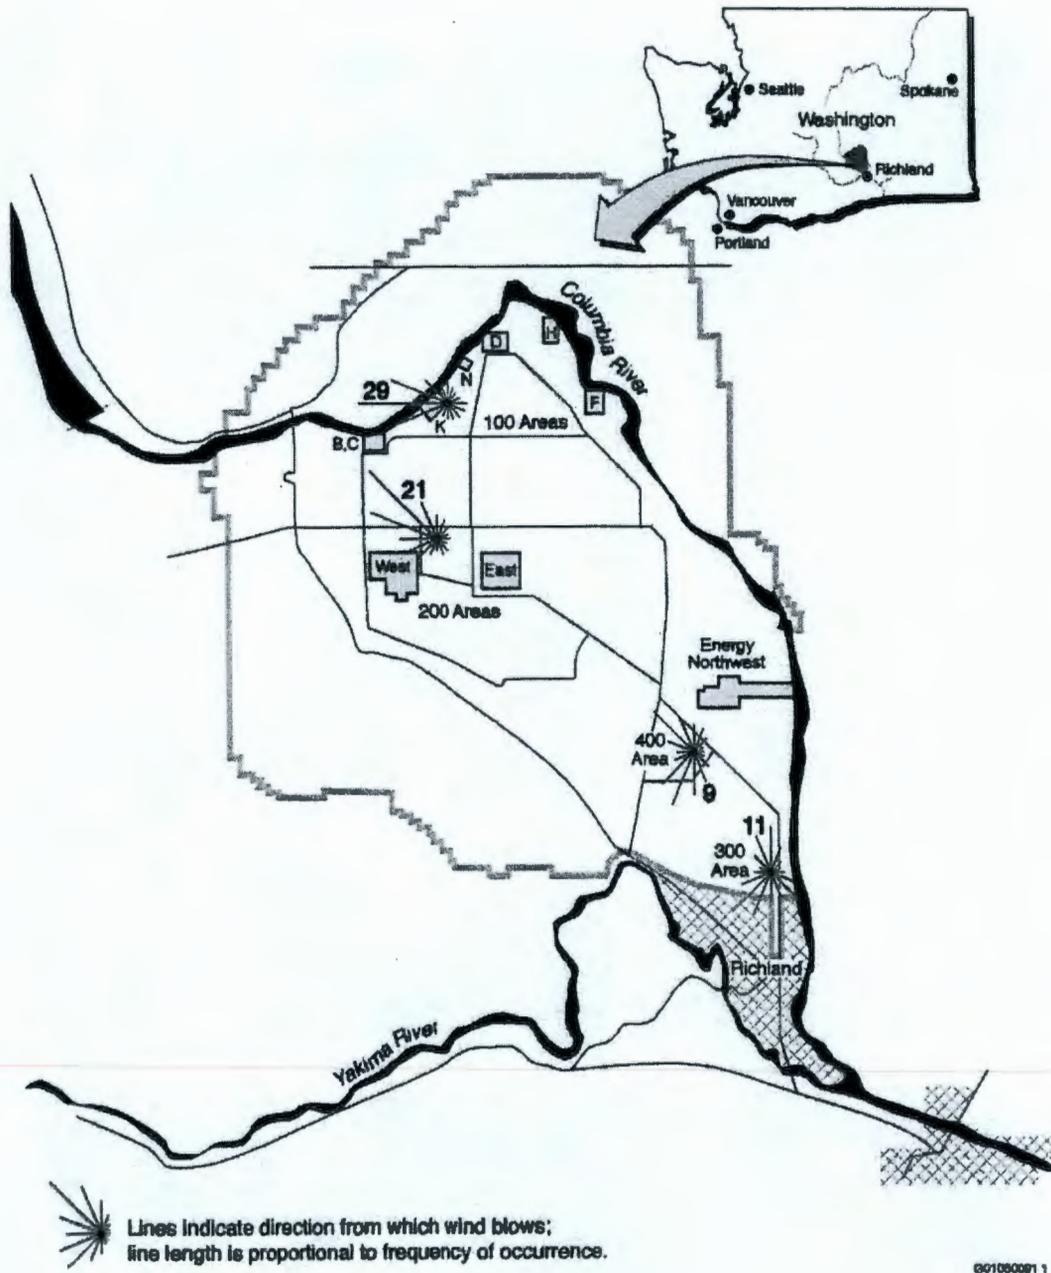



Figure A-1. Meteorological Stations and Wind Roses in 2005.

This page intentionally left blank.

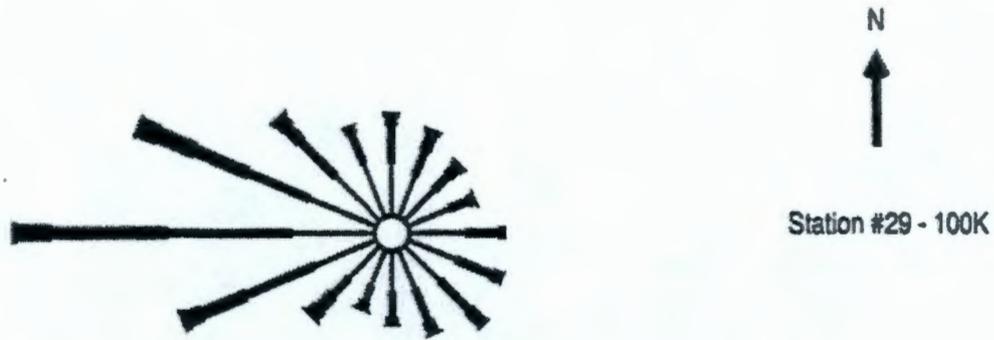


(a) Wind Rose

Period: 1/2005 - 12/2005

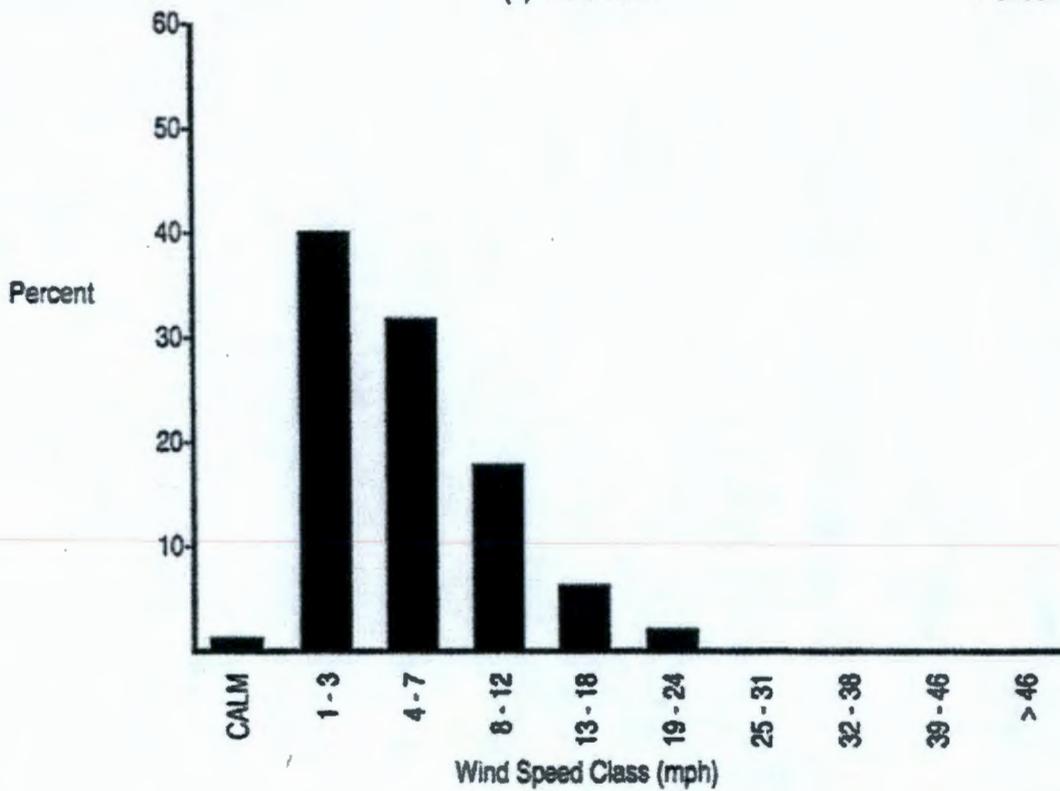

(b) Wind Speed Histogram

Figure A-2. 100-K Area Wind Rose and Histogram.

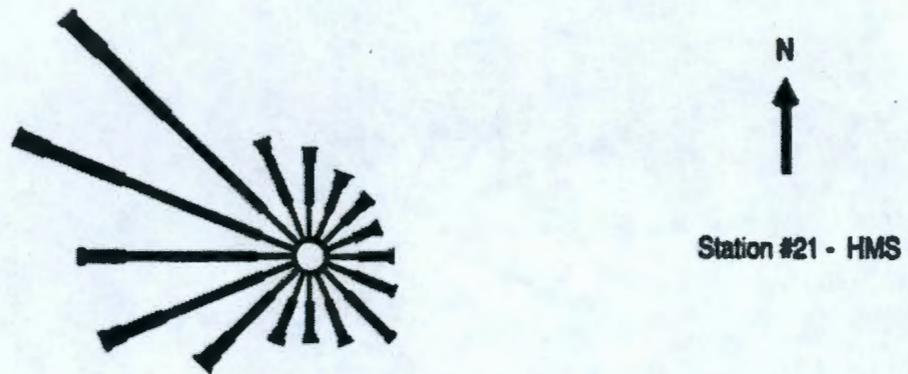

(a) Wind Rose

Period: 1/2005 - 12/2005


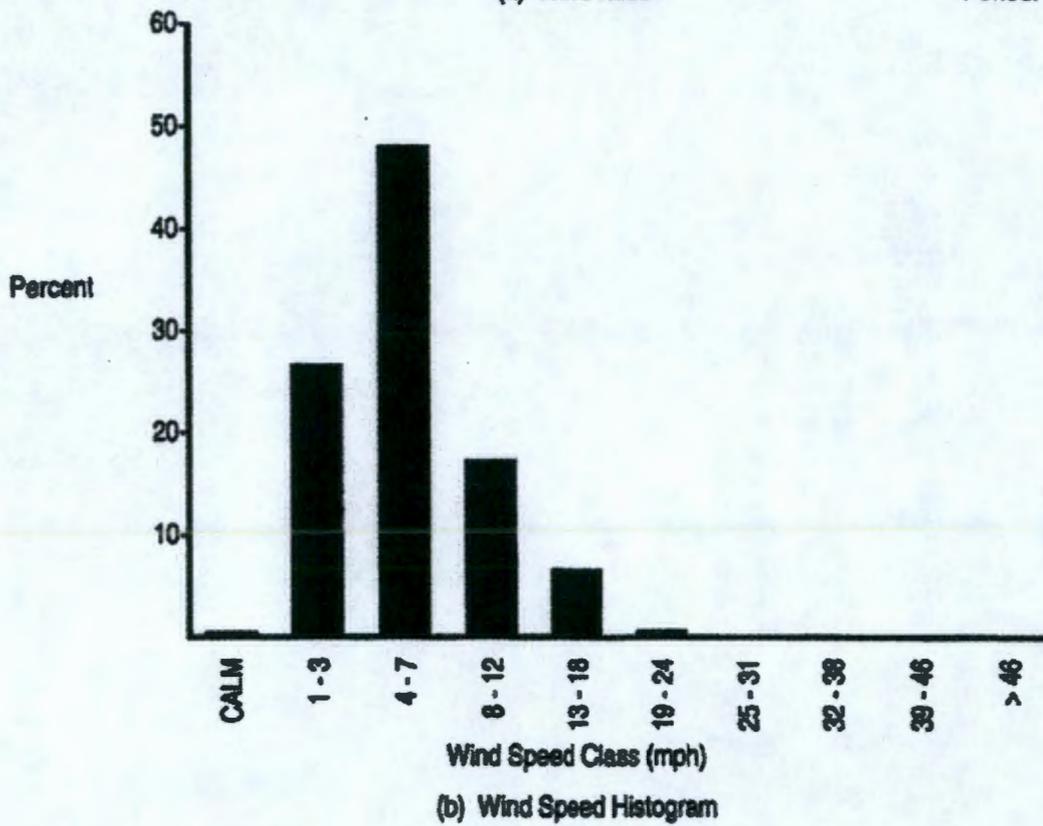



Figure A-3. 200 Area Wind Rose and Histogram.

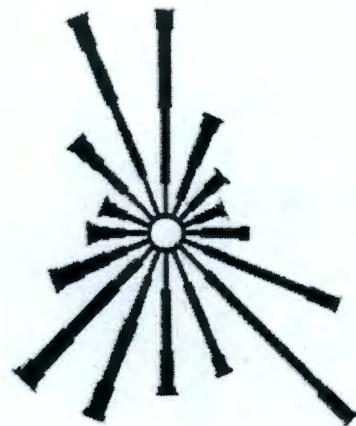

Station #11 - 300A


(a) Wind Rose

Period: 1/2005 - 12/2005

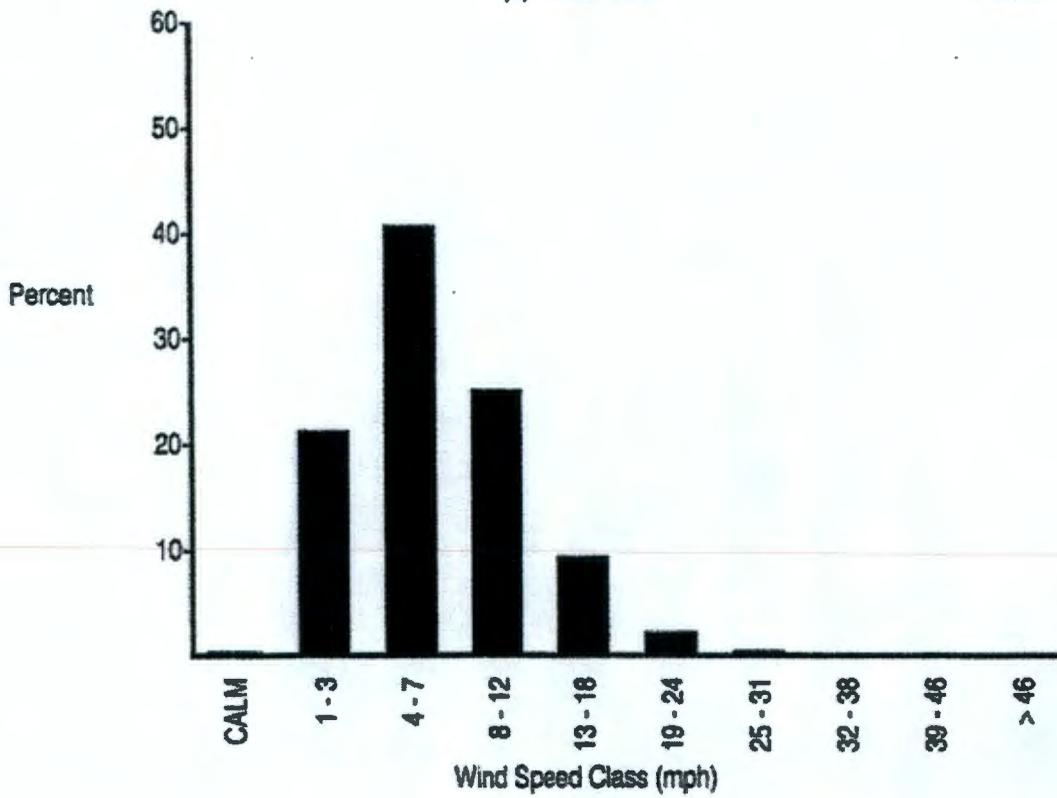


(b) Wind Speed Histogram

Figure A-5. 300 Area Wind Rose and Histogram.

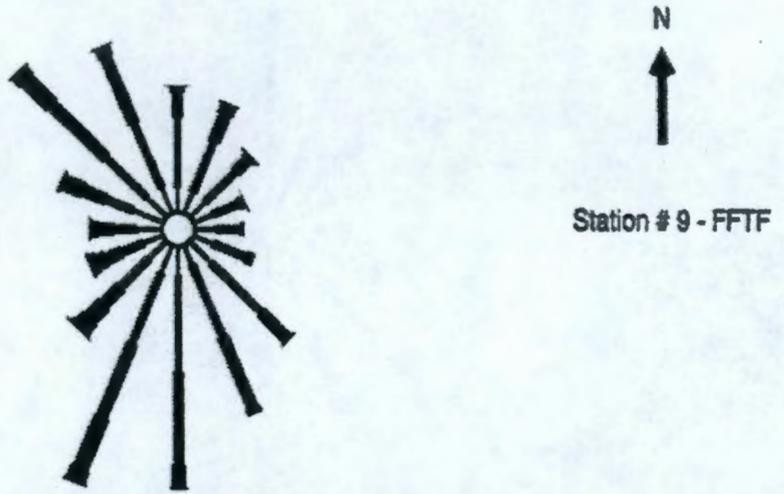

(a) Wind Rose

Period: 1/2005 - 12/2005

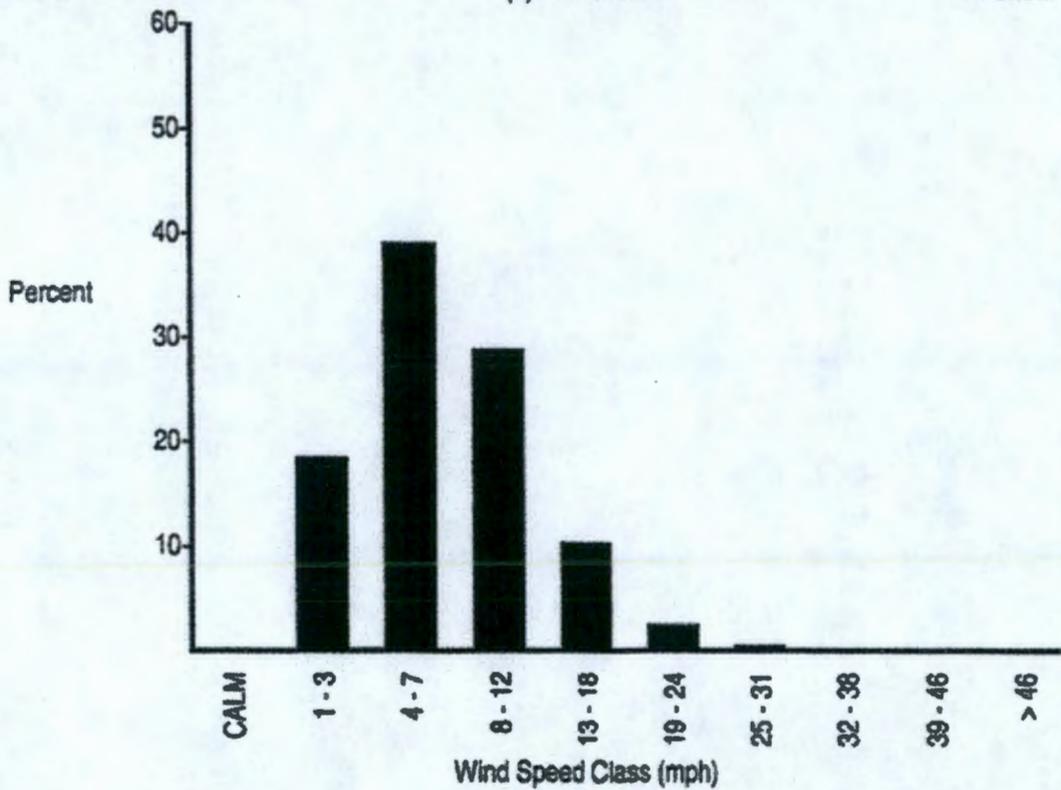

(b) Wind Speed Histogram

Figure A-6. 400 Area Wind Rose and Histogram.

Table A-1. Annual Average Dispersion Factor around the 100-K Area during 2005 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	2.8 E-06	5.6 E-07	2.6 E-07	1.6 E-07	1.1 E-07	5.5 E-08	2.1 E-08	1.1 E-08	6.8 E-09	4.9 E-09
NNE	2.8 E-06	5.6 E-07	2.7 E-07	1.6 E-07	1.2 E-07	5.6 E-08	2.2 E-08	1.1 E-08	7.1 E-09	5.1 E-09
NE	3.5 E-06	7.2 E-07	3.5 E-07	2.1 E-07	1.5 E-07	7.3 E-08	2.9 E-08	1.4 E-08	9.3 E-09	6.7 E-09
ENE	6.5 E-06	1.4 E-06	6.8 E-07	4.2 E-07	3.0 E-07	1.5 E-07	5.8 E-08	2.9 E-08	1.9 E-08	1.4 E-08
E	9.3 E-06	1.9 E-06	9.2 E-07	5.7 E-07	4.0 E-07	2.0 E-07	7.7 E-08	3.9 E-08	2.5 E-08	1.8 E-08
ESE	6.5 E-06	1.3 E-06	6.3 E-07	3.9 E-07	2.7 E-07	1.3 E-07	5.2 E-08	2.6 E-08	1.7 E-08	1.2 E-08
SE	4.3 E-06	8.4 E-07	3.9 E-07	2.4 E-07	1.7 E-07	8.2 E-08	3.2 E-08	1.6 E-08	1.0 E-08	7.4 E-09
SSE	3.4 E-06	6.5 E-07	3.0 E-07	1.9 E-07	1.3 E-07	6.3 E-08	2.4 E-08	1.2 E-08	7.8 E-09	5.6 E-09
S	3.2 E-06	6.2 E-07	2.9 E-07	1.8 E-07	1.2 E-07	6.0 E-08	2.3 E-08	1.2 E-08	7.4 E-09	5.3 E-09
SSW	2.9 E-06	5.7 E-07	2.7 E-07	1.6 E-07	1.1 E-07	5.6 E-08	2.2 E-08	1.1 E-08	7.0 E-09	5.0 E-09
SW	2.7 E-06	5.5 E-07	2.6 E-07	1.6 E-07	1.1 E-07	5.5 E-08	2.1 E-08	1.1 E-08	6.9 E-09	5.0 E-09
WSW	3.0 E-06	5.8 E-07	2.7 E-07	1.7 E-07	1.2 E-07	5.7 E-08	2.2 E-08	1.1 E-08	7.2 E-09	5.2 E-09
W	3.8 E-06	7.7 E-07	3.7 E-07	2.3 E-07	1.6 E-07	7.7 E-08	3.0 E-08	1.5 E-08	9.7 E-09	7.0 E-09
WNW	3.7 E-06	7.3 E-07	3.5 E-07	2.1 E-07	1.5 E-07	7.2 E-08	2.8 E-08	1.4 E-08	9.0 E-09	6.5 E-09
NW	3.6 E-06	7.3 E-07	3.4 E-07	2.1 E-07	1.5 E-07	7.2 E-08	2.8 E-08	1.4 E-08	9.1 E-09	6.5 E-09
NNW	3.1 E-06	6.1 E-07	2.9 E-07	1.8 E-07	1.2 E-07	6.0 E-08	2.3 E-08	1.2 E-08	7.4 E-09	5.3 E-09

Table A-2. Annual Average Dispersion Factor around the 200 Area during 2005 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	2.5 E-06	5.1 E-07	2.4 E-07	1.5 E-07	1.1 E-07	5.2 E-08	2.0 E-08	1.0 E-08	6.5 E-09	4.7 E-09
NNE	2.7 E-06	5.5 E-07	2.6 E-07	1.6 E-07	1.1 E-07	5.5 E-08	2.1 E-08	1.1 E-08	6.9 E-09	5.0 E-09
NE	4.0 E-06	8.2 E-07	3.9 E-07	2.4 E-07	1.7 E-07	8.3 E-08	3.2 E-08	1.6 E-08	1.1 E-08	7.5 E-09
ENE	5.3 E-06	1.1 E-06	5.2 E-07	3.2 E-07	2.3 E-07	1.1 E-07	4.4 E-08	2.2 E-08	1.4 E-08	1.0 E-08
E	5.9 E-06	1.2 E-06	5.7 E-07	3.5 E-07	2.5 E-07	1.2 E-07	4.7 E-08	2.4 E-08	1.5 E-08	1.1 E-08
ESE	6.5 E-06	1.3 E-06	6.2 E-07	3.8 E-07	2.7 E-07	1.3 E-07	5.0 E-08	2.5 E-08	1.6 E-08	1.2 E-08
SE	6.6 E-06	1.3 E-06	6.1 E-07	3.7 E-07	2.6 E-07	1.3 E-07	4.9 E-08	2.5 E-08	1.6 E-08	1.1 E-08
SSE	3.1 E-06	6.0 E-07	2.8 E-07	1.7 E-07	1.2 E-07	5.8 E-08	2.3 E-08	1.1 E-08	7.3 E-09	5.3 E-09
S	2.2 E-06	4.1 E-07	1.9 E-07	1.1 E-07	7.9 E-08	3.8 E-08	1.5 E-08	7.3 E-09	4.7 E-09	3.4 E-09
SSW	1.9 E-06	3.4 E-07	1.6 E-07	9.4 E-08	6.5 E-08	3.1 E-08	1.2 E-08	5.9 E-09	3.8 E-09	2.7 E-09
SW	1.7 E-06	3.2 E-07	1.5 E-07	8.8 E-08	6.1 E-08	2.9 E-08	1.1 E-08	5.5 E-09	3.5 E-09	2.5 E-09
WSW	1.9 E-06	3.5 E-07	1.6 E-07	9.9 E-08	6.9 E-08	3.3 E-08	1.3 E-08	6.4 E-09	4.1 E-09	2.9 E-09
W	2.0 E-06	3.6 E-07	1.7 E-07	1.0 E-07	7.0 E-08	3.4 E-08	1.3 E-08	6.3 E-09	4.0 E-09	2.9 E-09
WNW	2.1 E-06	3.8 E-07	1.8 E-07	1.1 E-07	7.4 E-08	3.6 E-08	1.4 E-08	6.7 E-09	4.3 E-09	3.1 E-09
NW	3.0 E-06	5.8 E-07	2.7 E-07	1.7 E-07	1.2 E-07	5.6 E-08	2.2 E-08	1.1 E-08	7.0 E-09	5.0 E-09
NNW	2.6 E-06	5.1 E-07	2.4 E-07	1.5 E-07	1.0 E-07	5.0 E-08	1.9 E-08	9.6 E-09	6.1 E-09	4.4 E-09

Table A-3. Annual Average Dispersion Factor around the 200 Area during 2005 for a 89-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	3.5 E-08	2.9 E-08	2.3 E-08	1.9 E-08	1.6 E-08	1.0 E-08	5.3 E-09	3.1 E-09	2.2 E-09	1.7 E-09
NNE	2.6 E-08	2.5 E-08	2.1 E-08	1.7 E-08	1.4 E-08	9.3 E-09	4.7 E-09	2.8 E-09	1.9 E-09	1.5 E-09
NE	3.4 E-08	3.3 E-08	2.6 E-08	2.0 E-08	1.6 E-08	9.9 E-09	4.8 E-09	2.8 E-09	1.9 E-09	1.5 E-09
ENE	3.5 E-08	4.0 E-08	3.5 E-08	2.8 E-08	2.3 E-08	1.5 E-08	7.3 E-09	4.2 E-09	2.9 E-09	2.2 E-09
E	2.0 E-08	3.5 E-08	3.4 E-08	2.9 E-08	2.5 E-08	1.7 E-08	8.8 E-09	5.2 E-09	3.7 E-09	2.8 E-09
ESE	3.1 E-08	5.1 E-08	5.2 E-08	4.6 E-08	4.0 E-08	2.7 E-08	1.4 E-08	8.6 E-09	6.1 E-09	4.6 E-09
SE	9.5 E-08	9.6 E-08	8.8 E-08	7.4 E-08	6.3 E-08	4.1 E-08	2.1 E-08	1.3 E-08	8.7 E-09	6.6 E-09
SSE	1.0 E-07	7.7 E-08	6.1 E-08	4.8 E-08	4.0 E-08	2.5 E-08	1.2 E-08	7.2 E-09	5.0 E-09	3.8 E-09
S	9.8 E-08	6.8 E-08	5.2 E-08	4.0 E-08	3.2 E-08	2.0 E-08	9.3 E-09	5.2 E-09	3.6 E-09	2.7 E-09
SSW	7.1 E-08	4.8 E-08	3.6 E-08	2.8 E-08	2.2 E-08	1.3 E-08	6.2 E-09	3.5 E-09	2.4 E-09	1.8 E-09
SW	6.3 E-08	4.8 E-08	3.7 E-08	2.8 E-08	2.2 E-08	1.3 E-08	5.9 E-09	3.2 E-09	2.1 E-09	1.6 E-09
WSW	4.5 E-08	4.1 E-08	3.3 E-08	2.6 E-08	2.0 E-08	1.2 E-08	5.5 E-09	3.0 E-09	2.0 E-09	1.5 E-09
W	7.0 E-08	5.1 E-08	3.9 E-08	3.0 E-08	2.4 E-08	1.4 E-08	6.4 E-09	3.5 E-09	2.3 E-09	1.7 E-09
WNW	7.6 E-08	5.4 E-08	4.1 E-08	3.2 E-08	2.5 E-08	1.5 E-08	7.2 E-09	4.1 E-09	2.8 E-09	2.1 E-09
NW	6.6 E-08	5.4 E-08	4.3 E-08	3.4 E-08	2.8 E-08	1.7 E-08	8.2 E-09	4.6 E-09	3.2 E-09	2.4 E-09
NNW	3.8 E-08	3.9 E-08	3.4 E-08	2.7 E-08	2.3 E-08	1.4 E-08	7.1 E-09	4.1 E-09	2.8 E-09	2.1 E-09

Table A-4. Annual Average Dispersion Factor around the 300 Area during 2005 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	4.1 E-06	8.3 E-07	3.9 E-07	2.4 E-07	1.7 E-07	8.4 E-08	3.3 E-08	1.6 E-08	1.1 E-08	7.6 E-09
NNE	3.5 E-06	6.8 E-07	3.2 E-07	2.0 E-07	1.4 E-07	6.6 E-08	2.6 E-08	1.3 E-08	8.2 E-09	5.8 E-09
NE	3.1 E-06	5.9 E-07	2.8 E-07	1.7 E-07	1.2 E-07	5.7 E-08	2.2 E-08	1.1 E-08	7.0 E-09	5.0 E-09
ENE	2.5 E-06	5.0 E-07	2.4 E-07	1.5 E-07	1.0 E-07	5.0 E-08	1.9 E-08	9.7 E-09	6.2 E-09	4.4 E-09
E	2.0 E-06	3.9 E-07	1.8 E-07	1.1 E-07	7.9 E-08	3.8 E-08	1.5 E-08	7.4 E-09	4.7 E-09	3.4 E-09
ESE	2.1 E-06	4.4 E-07	2.1 E-07	1.3 E-07	9.1 E-08	4.5 E-08	1.7 E-08	8.8 E-09	5.6 E-09	4.0 E-09
SE	3.5 E-06	6.9 E-07	3.3 E-07	2.0 E-07	1.4 E-07	6.9 E-08	2.7 E-08	1.3 E-08	8.6 E-09	6.2 E-09
SSE	4.9 E-06	9.8 E-07	4.6 E-07	2.9 E-07	2.0 E-07	9.8 E-08	3.8 E-08	1.9 E-08	1.2 E-08	8.7 E-09
S	4.2 E-06	8.4 E-07	4.0 E-07	2.4 E-07	1.7 E-07	8.4 E-08	3.2 E-08	1.6 E-08	1.1 E-08	7.5 E-09
SSW	2.0 E-06	3.7 E-07	1.8 E-07	1.1 E-07	7.5 E-08	3.6 E-08	1.4 E-08	7.0 E-09	4.5 E-09	3.2 E-09
SW	1.2 E-06	2.3 E-07	1.1 E-07	6.5 E-08	4.5 E-08	2.2 E-08	8.6 E-09	4.3 E-09	2.8 E-09	2.0 E-09
WSW	9.7 E-07	1.8 E-07	8.4 E-08	5.1 E-08	3.6 E-08	1.7 E-08	6.7 E-09	3.4 E-09	2.2 E-09	1.6 E-09
W	1.6 E-06	3.1 E-07	1.5 E-07	9.0 E-08	6.3 E-08	3.1 E-08	1.2 E-08	6.1 E-09	3.9 E-09	2.8 E-09
WNW	3.6 E-06	7.2 E-07	3.4 E-07	2.1 E-07	1.5 E-07	7.2 E-08	2.8 E-08	1.4 E-08	9.1 E-09	6.5 E-09
NW	5.9 E-06	1.2 E-06	5.8 E-07	3.6 E-07	2.5 E-07	1.2 E-07	4.9 E-08	2.5 E-08	1.6 E-08	1.1 E-08
NNW	4.0 E-06	8.2 E-07	3.9 E-07	2.4 E-07	1.7 E-07	8.4 E-08	3.3 E-08	1.7 E-08	1.1 E-08	7.7 E-09

Table A-5. Annual Average Dispersion Factor around the 400 Area during 2005 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	4.5 E-06	8.9 E-07	4.2 E-07	2.6 E-07	1.8 E-07	8.9 E-08	3.4 E-08	1.7 E-08	1.1 E-08	8.0 E-09
NNE	4.6 E-06	9.0 E-07	4.3 E-07	2.6 E-07	1.8 E-07	8.9 E-08	3.4 E-08	1.7 E-08	1.1 E-08	7.9 E-09
NE	2.8 E-06	5.4 E-07	2.6 E-07	1.6 E-07	1.1 E-07	5.4 E-08	2.1 E-08	1.0 E-08	6.6 E-09	4.7 E-09
ENE	1.9 E-06	3.7 E-07	1.7 E-07	1.1 E-07	7.4 E-08	3.6 E-08	1.4 E-08	6.9 E-09	4.4 E-09	3.2 E-09
E	2.1 E-06	4.2 E-07	2.0 E-07	1.2 E-07	8.6 E-08	4.2 E-08	1.6 E-08	8.2 E-09	5.3 E-09	3.8 E-09
ESE	2.9 E-06	5.8 E-07	2.7 E-07	1.7 E-07	1.2 E-07	5.7 E-08	2.2 E-08	1.1 E-08	7.1 E-09	5.1 E-09
SE	3.9 E-06	7.7 E-07	3.6 E-07	2.2 E-07	1.6 E-07	7.6 E-08	3.0 E-08	1.5 E-08	9.5 E-09	6.8 E-09
SSE	3.7 E-06	7.4 E-07	3.5 E-07	2.1 E-07	1.5 E-07	7.3 E-08	2.8 E-08	1.4 E-08	9.1 E-09	6.6 E-09
S	2.8 E-06	5.6 E-07	2.6 E-07	1.6 E-07	1.1 E-07	5.6 E-08	2.2 E-08	1.1 E-08	7.0 E-09	5.0 E-09
SSW	2.3 E-06	4.5 E-07	2.1 E-07	1.3 E-07	9.2 E-08	4.5 E-08	1.7 E-08	8.8 E-09	5.6 E-09	4.1 E-09
SW	2.0 E-06	3.8 E-07	1.8 E-07	1.1 E-07	7.6 E-08	3.7 E-08	1.4 E-08	7.2 E-09	4.6 E-09	3.3 E-09
WSW	1.5 E-06	2.9 E-07	1.4 E-07	8.3 E-08	5.8 E-08	2.8 E-08	1.1 E-08	5.4 E-09	3.5 E-09	2.5 E-09
W	1.3 E-06	2.5 E-07	1.1 E-07	7.0 E-08	4.9 E-08	2.4 E-08	9.2 E-09	4.6 E-09	3.0 E-09	2.1 E-09
WNW	1.5 E-06	2.7 E-07	1.2 E-07	7.6 E-08	5.2 E-08	2.5 E-08	9.7 E-09	4.9 E-09	3.1 E-09	2.3 E-09
NW	3.0 E-06	5.8 E-07	2.7 E-07	1.7 E-07	1.2 E-07	5.7 E-08	2.2 E-08	1.1 E-08	7.1 E-09	5.1 E-09
NNW	3.5 E-06	7.2 E-07	3.4 E-07	2.1 E-07	1.5 E-07	7.3 E-08	2.8 E-08	1.4 E-08	9.2 E-09	6.6 E-09

Table A-6. Radionuclide Data on Clearance Class, Particle Size, Scavenging Coefficient, and Deposition Velocity Used for CAP88-PC Dose Calculations at the Hanford Site, 2005.

Radionuclide	Clearance class	Particle size (µm)	Scavenging Coefficient (per second)	Deposition Velocity (m/s)
³ H	*	0.0	0.00 E+00	0.00 E+00
⁶⁰ Co	Y	1.0	1.60 E-06	1.80 E-03
⁹⁰ Sr	D	1.0	1.60 E-06	1.80 E-03
⁹⁹ Tc	W	1.0	1.60 E-06	1.80 E-03
¹²⁵ Sb	W	1.0	1.60 E-06	1.80 E-03
¹²⁹ I	D	1.0	1.60 E-06	3.50 E-02
¹³⁷ Cs	D	1.0	1.60 E-06	1.80 E-03
^{137m} Ba	D	1.0	1.60 E-06	1.80 E-03
¹⁵⁴ Eu	W	1.0	1.60 E-06	1.80 E-03
²³⁸ Pu	Y	1.0	1.60 E-06	1.80 E-03
²³⁹ Pu	Y	1.0	1.60 E-06	1.80 E-03
²⁴¹ Pu	Y	1.0	1.60 E-06	1.80 E-03
²⁴¹ Am	W	1.0	1.60 E-06	1.80 E-03

Table A-7. Radionuclide Data on Decay Constant and Transfer Coefficient Used for CAP88-PC Dose Calculations at the Hanford Site, 2005.

Radionuclide	Decay constant (per day)			Transfer coefficient	
	Radioactive ¹	Surface	Water	Milk ²	Meat ³
³ H	0	5.48 E-05	0	0	0
⁶⁰ Co	0	5.48 E-05	0	2.00 E-03	2.00 E-02
⁹⁰ Sr	0	5.48 E-05	0	1.50 E-03	3.00 E-04
⁹⁹ Tc	0	5.48 E-05	0	1.00 E-02	8.50 E-03
¹²⁵ Sb	0	5.48 E-05	0	1.00 E-04	1.00 E-03
¹²⁹ I	0	5.48 E-05	0	1.00 E-02	7.00 E-03
¹³⁷ Cs	0	5.48 E-05	0	7.00 E-03	2.00 E-02
^{137m} Ba	3.91 E+02	5.48 E-05	0	3.50 E-04	1.50 E-04
¹⁵⁴ Eu	0	5.48 E-05	0	2.00 E-05	5.00 E-03
²³⁸ Pu	0	5.48 E-05	0	1.00 E-07	5.00 E-07
²³⁹ Pu	0	5.48 E-05	0	1.00 E-07	5.00 E-07
²⁴¹ Pu	0	5.48 E-05	0	1.00 E-07	5.00 E-07
²⁴¹ Am	0	5.48 E-05	0	4.00 E-07	3.50 E-06

¹ Effective radioactive decay constant in plume; set to zero if less than 1.0 E-02.

² Fraction of animal's daily intake of nuclide that appears in each liter of milk, in days/L.

³ Fraction of animal's daily intake of nuclide that appears in each kg of meat, in days/kg.

Table A-8. Radionuclide Data on Concentration Uptake Factor and Gastric Intestinal Uptake Fraction Used for CAP88-PC Dose Calculations at the Hanford Site, 2005.

Radionuclide	Concentration uptake factor		GI uptake fraction	
	Forage ¹	Edible ²	Inhalation	Ingestion
³ H	0	0	9.50 E-01	9.50 E-01
⁶⁰ Co	2.00 E-02	3.00 E-03	5.00 E-02	3.00 E-01
⁹⁰ Sr	2.50 E+00	1.07 E-01	3.00 E-01	3.00 E-01
⁹⁹ Tc	9.50 E+00	6.42 E-01	8.00 E-01	8.00 E-01
¹²⁹ I	1.50 E-01	2.14 E-02	9.50 E-01	9.50 E-01
¹²⁵ Sb	2.00 E-01	1.28 E-02	1.00 E-02	1.00 E-01
¹³⁷ Cs	8.00 E-02	1.28 E-02	9.50 E-01	9.50 E-01
^{137m} Ba	1.50 E-01	6.42 E-03	1.00 E-01	1.00 E-01
¹⁵⁴ Eu	1.00 E-02	1.71 E-03	1.00 E-03	1.00 E-03
²³⁸ Pu	4.50 E-04	1.93 E-05	1.00 E-03	1.00 E-03
²³⁹ Pu	4.50 E-04	1.93 E-05	1.00 E-04	1.00 E-03
²⁴¹ Pu	4.50 E-04	1.93 E-05	1.00 E-03	1.00 E-03
²⁴¹ Am	5.50 E-03	1.07 E-04	1.00 E-03	1.00 E-03

GI = gastric intestinal

¹ Concentration factor for uptake of nuclide from soil for pasture and forage, in pCi/kg dry weight per pCi/kg dry soil.

² Concentration factor for uptake of nuclide from soil by edible parts of crops, in pCi/kg wet weight per pCi/kg dry soil.

Table A-9. Exposure and Consumption Data for the Hanford Site.

FOOD SOURCE FOR THE MAXIMALLY EXPOSED INDIVIDUAL

<u>Food</u>	<u>Local</u>	<u>Regional</u>	<u>Imported</u>
Vegetable	1.000	0.000	0.000
Meat	1.000	0.000	0.000
Milk	1.000	0.000	0.000

VALUES FOR RADIONUCLIDE-INDEPENDENT VARIABLES

HUMAN INHALATION RATE (cm^2/hr) = $9.70 \text{ E}+05$

SOIL PARAMETERS

Effective surface density, $\text{kg}/\text{sq m}$, dry weight
(assumes 15-cm plow layer) = $2.24 \text{ E}+02$

BUILDUP TIMES

For activity in soil (yr) = $5.00 \text{ E}+01$
For radionuclides deposited on ground/water (d) = $1.83 \text{ E}+04$

DELAY TIMES

Ingestion of pasture grass by animals (hr) = $0.00 \text{ E}+00$
Ingestion of stored feed by animals (hr) = $2.40 \text{ E}+03$
Ingestion of leafy vegetables by man (hr) = $2.40 \text{ E}+01$
Ingestion of produce by man (hours) = $1.20 \text{ E}+02$
Transport time from animal feed-milk-man (d) = $2.00 \text{ E}+00$
Time from slaughter to consumption (d) = $1.50 \text{ E}+01$

WEATHERING

Removal rate constant for physical loss (per hr) = $3.00 \text{ E}-03$

CROP EXPOSURE DURATION

Pasture grass (hr) = $7.20 \text{ E}+02$
Crops/leafy vegetables (hr) = $2.16 \text{ E}+03$

AGRICULTURAL PRODUCTIVITY

Grass-cow-milk-man pathway (kg/m^2) = $3.00 \text{ E}-01$
Produce/leafy veg for human consumption (kg/m^2) = $2.00 \text{ E}+00$

FALLOUT INTERCEPTION FRACTIONS

Vegetables = $2.50 \text{ E}-01$
Pasture = $2.50 \text{ E}-01$

GRAZING PARAMETERS

Fraction of year animals graze on pasture = $7.50 \text{ E}-01$
Fraction of daily feed that is pasture grass when animal grazes on pasture = $1.00 \text{ E}+00$

ANIMAL FEED CONSUMPTION FACTORS

Contaminated feed/forage (kg/day , dry weight) = $1.56 \text{ E}+01$

Table A-9. Exposure and Consumption Data for the Hanford Site. (cont)

DAIRY PRODUCTIVITY

Milk production of cow (L/day) = 1.10 E+01

MEAT ANIMAL SLAUGHTER PARAMETERS

Muscle mass of animal at slaughter (kg) = 2.00 E+02

Fraction of herd slaughtered (per day) = 3.81 E-03

DECONTAMINATIONFraction of radioactivity retained after washing
or leafy vegetables and produce = 1.00 E+00**FRACTIONS GROWN IN GARDEN OF INTEREST: ONSITE/OFFSITE**

Produce ingested = 2.50E-01/1.00E+00

Leafy vegetables ingested = 2.50E-01/1.00E+00

INGESTION RATIOS:**IMMEDIATE SURROUNDING AREA/TOTAL WITHIN AREA**

Vegetables = 1.00 E+00

Meat = 1.00 E+00

Milk = 1.00 E+00

MINIMUM INGESTION FRACTIONS FROM OUTSIDE AREA

(Minimum fractions of food types from outside area listed below are actual fixed values.)

Vegetables = 0.00 E+00

Meat = 0.00 E+00

Milk = 0.00 E+00

HUMAN FOOD UTILIZATION FACTORS

Produce ingestion (kg/yr) = 2.20 E+02

Milk ingestion (L/yr) = 2.70 E+02

Meat ingestion (kg/yr) = 9.80 E+01

Leafy vegetable ingestion (kg/yr) = 3.00 E+01

SWIMMING PARAMETERS

Fraction of time spent swimming = 1.00 E-02

Dilution factor for water (cm) = 1.00 E+00

Table A-10. Hanford Site Meteorological Data — General Site Information.

HEIGHT OF LID

LIDAI = 1000 m

RAINFALL RATE

RR = 15.9 cm/yr

AVERAGE AIR TEMPERATURE

A = 12.0 °C (53.6 °F; 285.2 °K)

SURFACE ROUGHNESS LENGTH

z₀ = 0.010 m

VERTICAL TEMPERATURE GRADIENTS: (TG) (k/m)

STABILITY E	0.073
STABILITY F	0.109
STABILITY G	0.146

This page intentionally left blank.

APPENDIX B

ERRATA

This page intentionally left blank.

B.0 ERRATA

B.1 CORRECTIONS TO EMISSIONS DATA FOR TWO CH2M HILL STACKS, CALENDAR YEAR 2004

B.1.1 WDOH Notices of Correction for CH2M HILL Emission Units 296-P-43 and 296-B-28

Two Notices of Correction (NoC) from the Washington State Department of Health (WDOH) were sent to DOE-ORP and DOE-RL on September 28, 2005. The NoCs stemmed from two WDOH inspections of major stacks managed by CH2M HILL. Summaries of background information relative to the audit findings from the inspections are below.

B.1.1.1 AUDIT #430, Emission Unit 241-S-112 (i.e., 296-P-43)

Isotopic results for 296-P-43 sample S641589, with a collection date of 6/17/04, were fully factored into the *Radionuclide Air Emissions Report, for Calendar Year 2004* (DOE/RL-2005-06). However, during the data review prompted by Audit #430, the gross alpha and beta results for that sample were discovered to have been omitted from the report. The lateness of the sample arriving at the WSCF laboratory on 5/5/05 for rush analysis was seen as a contributing factor. End-of-the year samples, with few exceptions, are received at WSCF by the middle of January of the following year, with analytical results available for evaluation and review by the end of March.

Part of the corrective actions is to report the omitted gross alpha and beta data as an erratum to this current *Radionuclide Air Emissions Report*. The doses associated with these data have no significance to the overall compliance dose calculated for the Hanford Site maximally exposed individual (MEI) member of the public for 2004. The corrected dose total of $5.1 \text{ E-}10$ attributable to emissions from this stack is $1.6 \text{ E-}8$ of the 0.032 mrem EDE dose to the MEI in 2004. In the following table, the radiological data reported in DOE/RL-2005-06 are shown with the corrected data.

296-P-43 Stack Radiological Emission Data, Calendar Year 2004

Radionuclide or type of radioactivity	Reported in DOE/RL-2005-06			Corrected values, as applicable		
	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE
^{241}Am	$9.3 \text{ E-}17$	$1.7 \text{ E-}10$	$4.3 \text{ E-}10$	$9.3 \text{ E-}17$	$1.7 \text{ E-}10$	$4.3 \text{ E-}10$
gross α	0	≤ 0	0	$9.1 \text{ E-}16$	$1.6 \text{ E-}09$	NF
gross β	0	≤ 0	0	$2.9 \text{ E-}09$	$1.6 \text{ E-}15$	$7.5 \text{ E-}11$
Total dose: $4.3 \text{ E-}10$			Total dose: $5.1 \text{ E-}10$			

NF = not factored (i.e., if an isotopic release is reported, the reported release of the corresponding gross radioactivity type is not included in CAP88-PC calculations)

B.1.1.2 AUDIT #445, Emission Unit 296-B-28

The gross alpha and gross beta data for 296-B-28 sample S590572 were factored into the *Radionuclide Air Emissions Report* for calendar year 2004. However, during the data review prompted by Audit #445, the isotopic data for that sample, constituting a single detectable value for only Am-241, were discovered to have been omitted from the report. The lateness of the sample arriving at the WSCF laboratory on 2/23/05 for analysis was seen as a contributing factor. End-of-the year samples, with few exceptions, are received at WSCF by the middle of January of the following year, with analytical results available for evaluation and review by the end of March.

Part of the corrective actions is to report the omitted Am-241 result as an erratum in this current *Radionuclide Air Emissions Report*. The dose associated with this changed value has no significance to the overall compliance dose calculated for the Hanford Site maximally exposed individual (MEI) member of the public for 2004. The corrected dose total of $4.9 \text{ E-}10$ attributable to emissions from this stack is $1.5 \text{ E-}08$ of the 0.032 mrem EDE dose to the MEI in 2004. In the following table, the radiological data reported in DOE/RL-2005-06 are shown with the corrected data.

296-B-28 Stack Radiological Emission Data, Calendar Year 2004

Radionuclide or type of radioactivity	Reported in DOE/RL-2005-06			Corrected values		
	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE
$^{239/240}\text{Pu}$	$2.5 \text{ E-}17$	$2.7 \text{ E-}11$	$7.6 \text{ E-}11$	$1.3 \text{ E-}17$	$1.4 \text{ E-}11$	$3.9 \text{ E-}11$
^{241}Am	0	≤ 0	0	$5.2 \text{ E-}17$	$5.5 \text{ E-}11$	$2.4 \text{ E-}10$
gross α	$1.1 \text{ E-}15$	$1.1 \text{ E-}09$	NF	$2.3 \text{ E-}16$	$8.7 \text{ E-}09$	NF
gross β	$4.7 \text{ E-}15$	$4.9 \text{ E-}09$	$2.1 \text{ E-}10$	$6.0 \text{ E-}09$	$1.3 \text{ E-}15$	$1.6 \text{ E-}09$
Total dose: $2.9 \text{ E-}10$			Total dose: $4.9 \text{ E-}10$			

NF = not factored (i.e., if an isotopic release is reported, the reported release of the corresponding gross radioactivity type is not included in CAP88-PC calculations)

B.2 CORRECTION TO 296-Z-14 STACK FLOW AND ASSOCIATED VALUES

A mid-year change to the calendar year 2004 flow data for the 296-Z-14 stack was inadvertently either overwritten or deleted in the effluent database within which stack emission release values are calculated. As a consequence, slightly incorrect concentration, release, and dose values were reported in the *Radionuclide Air Emissions Report for the Hanford Site, Calendar Year 2004* (DOE/RL-2005-06). The flow rate was change from an actual measured value to a fixed value selected by way of regulatory agreement. This fixed value is the rated maximum capacity of the exhaust fan for this stack; it is a conservative non-measured value over twice the actual measured flow rate applicable to the first half of 2004. The calculated doses based on calendar-year emissions data for this stack are small enough to have no impact to the compliance dose calculated for the Hanford Site maximally exposed individual (MEI) member of the public for that year. Only a single radiological release value for this stack changed, which was for gross beta. The corrected dose total of $3.0 \text{ E-}09$ attributable to emissions from this stack is $9.4 \text{ E-}08$ of the 0.032 mrem EDE dose to the MEI in 2004. The differences between the affected reported values and the now-corrected values are shown in the following two tables:

296-Z-14 Stack Radiological Emission Data, Calendar Year 2004

Radionuclide or type of radioactivity	Reported in DOE/RL-2005-06			Corrected values, as applicable		
	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE	Conc. avg., $\mu\text{Ci/mL}$	Release, Ci	Annual dose, mrem EDE
^{241}Am	1.3 E-17	4.6 E-10	1.1 E-09	8.1 E-18	4.6 E-10	1.1 E-09
gross α	2.3 E-16	8.1 E-09	NF	1.5 E-16	8.7 E-09	NF
gross β	1.3 E-15	4.6 E-08	1.2 E-09	1.3 E-15	7.4 E-08	1.9 E-09
Total dose: 2.3 E-09			Total dose: 3.0 E-09			

NF = not factored (i.e., if an isotopic release is reported, the reported release of the corresponding gross radioactivity type is not included in CAP88-PC calculations)

296-Z-14 Stack Flow Data, Calendar Year 2004

Reported in DOE/RL-2005-06		Corrected values	
Avg. operating flow rate, ft^3/m (m^3/s)	Volume, ft^3 (m^3)	Avg. operating flow rate, ft^3/m (m^3/s)	Volume, ft^3 (m^3)
1,767 (0.83)	9.3 E+08 (2.6 E+07)	2,780 (1.3)	1.5 E+09 (4.1 E+07)

B.3 REORDERING OF STACK RANKINGS

Corrections to the dose values of the 296-B-28, 296-P-43, and 296-Z-14 stacks as described, respectively, in B.1.1.1, B.1.1.2, and B.2, affected the ranking of these stacks in Tables 3-3 and 3-4 of DOE/RL-2005-06. The two tables follow, reordered to reflect the changed ranking of these three stacks.

Table 3-3. Doses from Hanford Site Major Point Sources that Operated in 2004.

Source identification (contractor)	Effective dose equivalent (mrem) ^a	Percent of dose total ^b
100-K West Area Major Point Source		
296-K-142 (FH)	3.9 E-08	0.0028
200 East Area Major Point Sources		
291-A-1 (FH)	1.0 E-03	71.4
296-A-42 (CH2M HILL)	4.0 E-07	0.029
296-B-1 (FH)	3.7 E-08	0.0026
296-B-10 (FH)	3.5 E-06	0.25
296-B-28 (CH2M HILL)	4.9 E-10	<0.0001
296-H-212 (FH)	3.4 E-08	0.0024

Table 3-3. Doses from Hanford Site Major Point Sources that Operated in 2004.

Source identification (contractor)	Effective dose equivalent (mrem) ^a	Percent of dose total ^b
296-P-47 (CH2M HILL)	9.9 E-10	<0.0001
296-P-48 (CH2M HILL)	3.6 E-09	0.0003
200 West Area Major Point Sources		
296-P-43 (CH2M HILL)	3.1 E-09	0.0002
296-P-44 (CH2M HILL)	1.1 E-09	<0.0001
296-S-22 (CH2M HILL)	0	NA
296-T-18 (CH2M HILL)	1.6 E-10	<0.0001
296-W-4 (FH)	4.2 E-09	0.0003
291-Z-1 (FH)	1.2 E-04	8.6
296-Z-3 (FH)	3.6 E-07	0.026
296-Z-7 (FH)	1.3 E-10	<0.0001
296-Z-14 (FH)	2.3 E-09	0.0002
300 Area Major Point Sources		
340-NT-EX (FH)	1.2 E-08	0.0009
EP-324-01-S (FH)	9.2 E-07	0.066
EP-325-01-S (PNNL)	1.8 E-04	12.9
EP-327-01-S (FH)	1.7 E-06	0.12
EP-331-01-V (PNNL)	4.2 E-07	0.03
Major point source totals	≈1.6 E-03	≈93.4

^a 1 mrem = 1.0 E-02 mSv

^b The dose total for all stacks is ≈1.4 E-03 mrem. Of that total, the portion from minor stacks is ≈1.2 E-04 mrem, or ≈8.6%. Slightly varying totals are due to numerical rounding.

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2004.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
1	291-A-1	Major	FH	200 East	1.0 E-03	71.4
2	EP-325-01-S	Major	PNNL	300	1.8 E-04	12.9
3	291-Z-1	Major	FH	200 West	1.2 E-04	8.6
4	105-KE Basin	minor	FH	100-KE	6.1 E-05	4.4
5	105-KW Basin	minor	FH	100-KW	1.7 E-05	1.2
6	291-T-1	minor	FH	200 West	1.6 E-05	1.1
7	FFTF-CB-EX	minor	FH	400	9.7 E-06	0.69

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2004.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
8	EP-326-01-S	minor	PNNL	300	7.8 E-06	0.56
9	296-B-10	Major	FH	200 East	3.5 E-06	0.25
10	296-S-21	minor	FH	200 West	1.8 E-06	0.13
11	EP-327-01-S	Major	FH	300	1.7 E-06	0.12
12	291-U-1	minor	FH	200 West	1.7 E-06	0.12
13	FFTF-HT-TR	minor	FH	400	1.5 E-06	0.11
14	EP-329-01-S	minor	PNNL	300	1.1 E-06	0.079
15	296-A-21	minor	CH2M HILL	200 East	1.0 E-06	0.071
16	EP-324-01-S	Major	FH	300	9.2 E-07	0.066
17	FFTF-RE-SB	minor	FH	400	8.1 E-07	0.058
18	340-DECON	minor	FH	300	7.8 E-07	0.056
18	EP-320-01-S	minor	PNNL	300	7.8 E-07	0.056
20	EP-331-01-V	Major	PNNL	300	4.2 E-07	0.030
21	296-A-42	Major	CH2M HILL	200 East	4.0 E-07	0.029
22	296-A-30	minor	CH2M HILL	200 East	3.6 E-07	0.026
22	296-Z-3	Major	FH	200 West	3.6 E-07	0.026
24	437-MN&ST	minor	FH	400	3.5 E-07	0.025
25	296-A-28	minor	CH2M HILL	200 East	3.0 E-07	0.021
26	296-E-1	minor	FH	200 East	1.4 E-07	0.001
27	296-A-41	minor	CH2M HILL	200 East	8.8 E-08	0.0063
28	296-S-18	minor	CH2M HILL	200 West	4.7 E-08	0.0034
29	EP-318-01-S	minor	PNNL	300	4.1 E-08	0.0029
30	296-K-142	Major	FH	100-KW	3.9 E-08	0.0028
30	437-1-61	minor	FH	400	3.9 E-08	0.0028
32	296-B-1	Major	FH	200 East	3.7 E-08	0.0026
33	296-A-43	minor	CH2M HILL	200 East	3.5 E-08	0.0025
34	296-H-212	Major	FH	200 East	3.4 E-08	0.0024
35	EP-323-01-S	minor	PNNL	300	3.1 E-08	0.0022
36	296-A-18	minor	CH2M HILL	200 East	2.4 E-08	0.0017
36	EP-306W-03-V	minor	PNNL	300	2.4 E-08	0.0017
38	296-A-20	minor	CH2M HILL	200 East	2.3 E-08	0.0016
39	EP-320-02-S	minor	PNNL	300	1.9 E-08	0.0014
40	296-P-31	minor	FH	200 East	1.7 E-08	0.0012
41	296-S-25 & 296-P-23	minor	CH2M HILL	200 West	1.6 E-08	0.0011
42	296-A-19	minor	CH2M HILL	200 East	1.5 E-08	0.0011
43	340-NT-EX	Major	FH	300	1.2 E-08	0.0009
44	291-S-1	minor	FH	200 West	1.1 E-08	0.0008
45	296-A-29	minor	CH2M HILL	200 East	1.0 E-08	0.0007
45	296-A-40	minor	CH2M HILL	200 East	1.0 E-08	0.0007
47	EP-327-02-V	minor	FH	300	7.7 E-09	0.0006

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2004.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
48	296-S-15	minor	CH2M HILL	200 West	4.2 E-09	0.0003
48	296-W-4	Major	FH	200 West	4.2 E-09	0.0003
50	EP-320-04-S	minor	PNNL	300	4.2 E-09	0.0003
51	EP-305B-01-S	minor	PNNL	300	3.9 E-09	0.0003
52	296-P-48	Major	CH2M HILL	200 East	3.6 E-09	0.0003
53	296-A-22	minor	CH2M HILL	200 East	3.5 E-09	0.0003
54	296-P-43	Major	CH2M HILL	200 West	3.1 E-09	0.0002
55	296-Z-14	Major	FH	200 West	2.7 E-09	0.0002
56	696-W-1	minor	FH	600	2.6 E-09	0.0002
57	296-Z-5	minor	FH	200 West	2.4 E-09	0.0002
58	296-T-17	minor	CH2M HILL	200 West	1.9 E-09	0.0001
59	296-P-22	minor	CH2M HILL	200 East	1.3 E-09	<0.0001
60	296-P-44	Major	CH2M HILL	200 West	1.1 E-09	<0.0001
60	296-Z-6	minor	FH	200 West	1.1 E-09	<0.0001
62	296-P-47	Major	CH2M HILL	200 East	9.9 E-10	<0.0001
63	EP-3730-01-S	minor	PNNL	300	8.9 E-10	<0.0001
64	296-A-27	minor	CH2M HILL	200 East	8.6 E-10	<0.0001
65	296-T-7	minor	FH	200 West	7.8 E-10	<0.0001
66	296-S-16	minor	FH	200 West	7.2 E-10	<0.0001
67	1706-KE	minor	FH	100-KE	6.5 E-10	<0.0001
68	296-B-28	Major	CH2M HILL	200 East	4.9 E-10	<0.0001
69	696-W-2	minor	FH	600	3.4 E-10	<0.0001
70	RCF-2-EX	minor	BHI	300	2.9 E-10	<0.0001
71	296-A-26	minor	CH2M HILL	200 East	2.2 E-10	<0.0001
72	296-T-18	Major	CH2M HILL	200 West	1.6 E-10	<0.0001
73	296-Z-7	Major	FH	200 West	1.3 E-10	<0.0001
NA	107-N	minor	BHI	100-N	0	0
NA	296-S-22	Major	CH2M HILL	200 West	0	0
NA	296-Z-15	minor	FH	200 West	0	0
NA	EP-320-03-S	minor	PNNL	300	0	0
NA	EP-3020-01-S	minor	PNNL	300	0	0
NA	296-A-10	minor	FH	200 East	DNO	NA
NA	296-C-5	Major	CH2M HILL	200 East	DNO	NA
NA	296-C-6	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-16	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-28	minor	CH2M HILL	200 West	DNO	NA
NA	296-P-32	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-33	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-34	Major	CH2M HILL	200 East	DNO	NA
NA	296-P-45	Major	CH2M HILL	200 West	DNO	NA

Table 3-4. Ranking of Doses from Hanford Site Stack Radionuclides Emissions by Stack, Calendar Year 2004.

Rank	Stack	Major or minor	Contractor	Operating Area	EDE (mrem) ^a	Percent of total dose
NA	296-W-3	minor	CH2M HILL	200 West	DNO	NA
NA	340-B BLDG	minor	FH	300	DNO	NA
Totals^b ▶					≈1.4 E-03	≈100

^a EDE = effective dose equivalent; 1 mrem = 1.0 E-02 mSv

^b Slight differences in totals due to numerical rounding.

DNO = did not operate.

B.4 CORRECTION TO TABLES OF AVERAGE DISPERSION FACTORS

The ordering of dispersion factors in Tables A-1 through A-5 in the *Radionuclide Air Emissions Report for the Hanford Site, Calendar Year 2004* (DOE/RL-2005-06) was inadvertently misaligned when generating an Excel spreadsheet version from the CAP88-PC source. However, correct factors were used in all compliance dose calculations reported in DOE/RL-2005-06. Displaying the factors in the annual report is for information only; even so, they need to be accurate. The five corrected tables follow.

Table A-1. Annual Average Dispersion Factor around the 100-K Area during 2004 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	3.7E-06	7.6E-07	3.6E-07	2.2E-07	1.6E-07	7.7E-08	3.0E-08	1.5E-08	9.5E-09	6.8E-09
NNE	3.1E-06	6.5E-07	3.1E-07	1.9E-07	1.3E-07	6.5E-08	2.5E-08	1.3E-08	8.1E-09	5.8E-09
NE	4.1E-06	8.5E-07	4.0E-07	2.5E-07	1.8E-07	8.6E-08	3.4E-08	1.7E-08	1.1E-08	7.8E-09
ENE	6.8E-06	1.5E-06	7.0E-07	4.4E-07	3.1E-07	1.5E-07	5.9E-08	3.0E-08	1.9E-08	1.4E-08
E	1.0E-05	2.2E-06	1.1E-06	6.6E-07	4.6E-07	2.3E-07	8.8E-08	4.5E-08	2.9E-08	2.1E-08
ESE	7.1E-06	1.4E-06	6.8E-07	4.2E-07	2.9E-07	1.4E-07	5.5E-08	2.8E-08	1.8E-08	1.3E-08
SE	5.5E-06	1.1E-06	5.2E-07	3.2E-07	2.2E-07	1.1E-07	4.1E-08	2.1E-08	1.3E-08	9.4E-09
SSE	3.9E-06	7.7E-07	3.6E-07	2.2E-07	1.5E-07	7.4E-08	2.8E-08	1.4E-08	8.9E-09	6.3E-09
S	3.8E-06	7.2E-07	3.3E-07	2.0E-07	1.4E-07	6.7E-08	2.5E-08	1.2E-08	7.8E-09	5.6E-09
SSW	3.0E-06	5.9E-07	2.7E-07	1.7E-07	1.2E-07	5.6E-08	2.1E-08	1.1E-08	6.7E-09	4.8E-09
SW	3.0E-06	6.1E-07	2.9E-07	1.8E-07	1.2E-07	6.0E-08	2.3E-08	1.2E-08	7.4E-09	5.3E-09
WSW	3.6E-06	7.1E-07	3.4E-07	2.1E-07	1.5E-07	7.0E-08	2.7E-08	1.4E-08	8.6E-09	6.2E-09
W	4.0E-06	7.9E-07	3.7E-07	2.3E-07	1.6E-07	7.7E-08	3.0E-08	1.5E-08	9.5E-09	6.8E-09
WNW	4.0E-06	7.9E-07	3.7E-07	2.3E-07	1.6E-07	7.7E-08	3.0E-08	1.5E-08	9.4E-09	6.7E-09
NW	4.3E-06	8.5E-07	4.0E-07	2.5E-07	1.7E-07	8.3E-08	3.2E-08	1.6E-08	1.0E-08	7.3E-09
NNW	4.3E-06	8.5E-07	4.0E-07	2.5E-07	1.7E-07	8.4E-08	3.3E-08	1.6E-08	1.0E-08	7.4E-09

Table A-2. Annual Average Dispersion Factor around the 200 Area during 2004 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	2.9E-06	5.9E-07	2.8E-07	1.7E-07	1.2E-07	5.9E-08	2.3E-08	1.2E-08	7.4E-09	5.3E-09
NNE	2.7E-06	5.6E-07	2.7E-07	1.6E-07	1.2E-07	5.7E-08	2.2E-08	1.1E-08	7.1E-09	5.1E-09
NE	3.8E-06	7.9E-07	3.8E-07	2.3E-07	1.6E-07	8.0E-08	3.1E-08	1.6E-08	1.0E-08	7.2E-09
ENE	5.8E-06	1.2E-06	5.8E-07	3.6E-07	2.5E-07	1.2E-07	4.9E-08	2.5E-08	1.6E-08	1.1E-08
E	6.5E-06	1.4E-06	6.6E-07	4.1E-07	2.9E-07	1.4E-07	5.6E-08	2.8E-08	1.8E-08	1.3E-08
ESE	7.4E-06	1.5E-06	7.3E-07	4.5E-07	3.2E-07	1.6E-07	6.1E-08	3.1E-08	2.0E-08	1.4E-08
SE	6.6E-06	1.3E-06	6.0E-07	3.7E-07	2.6E-07	1.3E-07	4.8E-08	2.4E-08	1.5E-08	1.1E-08
SSE	4.5E-06	8.3E-07	3.8E-07	2.3E-07	1.6E-07	7.6E-08	2.8E-08	1.4E-08	8.7E-09	6.1E-09
S	3.5E-06	6.3E-07	2.9E-07	1.7E-07	1.2E-07	5.6E-08	2.1E-08	1.0E-08	6.3E-09	4.5E-09
SSW	2.6E-06	4.9E-07	2.2E-07	1.3E-07	9.3E-08	4.4E-08	1.6E-08	8.0E-09	5.0E-09	3.6E-09
SW	2.6E-06	4.6E-07	2.1E-07	1.3E-07	8.6E-08	4.1E-08	1.5E-08	7.2E-09	4.5E-09	3.2E-09
WSW	2.3E-06	4.3E-07	2.0E-07	1.2E-07	8.3E-08	4.0E-08	1.5E-08	7.3E-09	4.6E-09	3.3E-09
W	2.1E-06	4.1E-07	1.9E-07	1.2E-07	8.0E-08	3.9E-08	1.5E-08	7.2E-09	4.5E-09	3.2E-09
WNW	2.4E-06	4.6E-07	2.2E-07	1.3E-07	9.0E-08	4.3E-08	1.6E-08	8.1E-09	5.1E-09	3.6E-09
NW	3.2E-06	6.1E-07	2.8E-07	1.7E-07	1.2E-07	5.8E-08	2.2E-08	1.1E-08	6.9E-09	4.9E-09
NNW	3.4E-06	6.9E-07	3.3E-07	2.0E-07	1.4E-07	6.8E-08	2.6E-08	1.3E-08	8.4E-09	6.0E-09

Table A-3. Annual Average Dispersion Factor around the 200 Area during 2004 for a 89-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	5.5E-09	1.9E-08	1.6E-08	1.2E-08	9.9E-09	5.9E-09	2.7E-09	1.4E-09	9.6E-10	7.0E-10
NNE	7.2E-09	2.1E-08	1.8E-08	1.4E-08	1.1E-08	6.4E-09	2.9E-09	1.5E-09	1.0E-09	7.4E-10
NE	1.5E-08	2.4E-08	2.0E-08	1.5E-08	1.2E-08	7.0E-09	3.2E-09	1.7E-09	1.1E-09	8.4E-10
ENE	1.1E-08	2.5E-08	2.2E-08	1.7E-08	1.4E-08	8.2E-09	3.8E-09	2.1E-09	1.4E-09	1.0E-09
E	9.5E-09	2.5E-08	2.2E-08	1.8E-08	1.5E-08	9.4E-09	4.6E-09	2.6E-09	1.8E-09	1.4E-09
ESE	6.1E-09	3.4E-08	3.2E-08	2.7E-08	2.3E-08	1.4E-08	7.1E-09	4.1E-09	2.8E-09	2.1E-09
SE	1.9E-08	7.2E-08	6.4E-08	5.1E-08	4.2E-08	2.5E-08	1.2E-08	6.5E-09	4.4E-09	3.2E-09
SSE	1.7E-08	5.9E-08	4.9E-08	3.8E-08	3.1E-08	1.8E-08	8.0E-09	4.3E-09	2.9E-09	2.1E-09
S	2.4E-08	5.9E-08	4.8E-08	3.6E-08	2.8E-08	1.6E-08	6.9E-09	3.6E-09	2.3E-09	1.7E-09
SSW	2.4E-08	5.2E-08	4.0E-08	3.0E-08	2.3E-08	1.3E-08	5.4E-09	2.8E-09	1.8E-09	1.3E-09
SW	2.4E-08	4.7E-08	3.6E-08	2.7E-08	2.0E-08	1.1E-08	4.6E-09	2.4E-09	1.5E-09	1.1E-09
WSW	1.4E-08	3.4E-08	2.6E-08	2.0E-08	1.5E-08	8.5E-09	3.6E-09	1.9E-09	1.2E-09	8.7E-10
W	1.5E-08	3.9E-08	3.2E-08	2.4E-08	1.9E-08	1.1E-08	4.5E-09	2.3E-09	1.5E-09	1.1E-09
WNW	1.5E-08	3.8E-08	3.0E-08	2.2E-08	1.7E-08	9.6E-09	4.1E-09	2.1E-09	1.4E-09	9.7E-10
NW	1.5E-08	3.9E-08	3.2E-08	2.5E-08	1.9E-08	1.1E-08	4.8E-09	2.5E-09	1.6E-09	1.2E-09
NNW	8.8E-09	3.4E-08	2.9E-08	2.3E-08	1.8E-08	1.1E-08	4.8E-09	2.6E-09	1.7E-09	1.2E-09

Table A-4. Annual Average Dispersion Factor around the 300 Area during 2004 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	4.4E-06	9.1E-07	4.3E-07	2.7E-07	1.9E-07	9.2E-08	3.6E-08	1.8E-08	1.2E-08	8.3E-09
NNE	4.3E-06	8.3E-07	3.9E-07	2.4E-07	1.7E-07	8.1E-08	3.1E-08	1.6E-08	9.9E-09	7.1E-09
NE	3.5E-06	6.8E-07	3.2E-07	1.9E-07	1.3E-07	6.5E-08	2.5E-08	1.2E-08	7.8E-09	5.6E-09
ENE	2.5E-06	4.7E-07	2.2E-07	1.4E-07	9.5E-08	4.6E-08	1.8E-08	8.8E-09	5.6E-09	4.0E-09
E	2.1E-06	4.2E-07	2.0E-07	1.2E-07	8.4E-08	4.1E-08	1.6E-08	7.9E-09	5.0E-09	3.6E-09
ESE	2.4E-06	4.9E-07	2.3E-07	1.4E-07	1.0E-07	4.9E-08	1.9E-08	9.6E-09	6.1E-09	4.4E-09
SE	4.0E-06	8.3E-07	3.9E-07	2.4E-07	1.7E-07	8.3E-08	3.2E-08	1.6E-08	1.0E-08	7.4E-09
SSE	5.1E-06	1.1E-06	5.2E-07	3.2E-07	2.3E-07	1.1E-07	4.3E-08	2.2E-08	1.4E-08	9.9E-09
S	4.1E-06	8.4E-07	4.0E-07	2.5E-07	1.7E-07	8.5E-08	3.3E-08	1.6E-08	1.1E-08	7.5E-09
SSW	2.2E-06	4.5E-07	2.1E-07	1.3E-07	9.0E-08	4.4E-08	1.7E-08	8.5E-09	5.4E-09	3.9E-09
SW	1.4E-06	2.6E-07	1.2E-07	7.3E-08	5.0E-08	2.4E-08	9.0E-09	4.4E-09	2.8E-09	2.0E-09
WSW	1.4E-06	2.8E-07	1.3E-07	7.9E-08	5.5E-08	2.6E-08	9.9E-09	4.9E-09	3.1E-09	2.2E-09
W	1.8E-06	3.5E-07	1.6E-07	9.8E-08	6.8E-08	3.3E-08	1.2E-08	6.1E-09	3.9E-09	2.7E-09
WNW	4.8E-06	9.8E-07	4.6E-07	2.9E-07	2.0E-07	9.8E-08	3.8E-08	1.9E-08	1.2E-08	8.7E-09
NW	6.4E-06	1.4E-06	6.6E-07	4.1E-07	2.9E-07	1.4E-07	5.5E-08	2.8E-08	1.8E-08	1.3E-08
NNW	4.6E-06	9.6E-07	4.6E-07	2.8E-07	2.0E-07	9.7E-08	3.8E-08	1.9E-08	1.2E-08	8.7E-09

Table A-5. Annual Average Dispersion Factor around the 400 Area during 2004 for a 10-Meter Release Height.

Direction	Distance									
	0.8 km	2.4 km	4.0 km	5.6 km	7.2 km	12 km	24 km	40 km	56 km	72 km
N	4.8E-06	9.6E-07	4.6E-07	2.8E-07	2.0E-07	9.5E-08	3.7E-08	1.9E-08	1.2E-08	8.5E-09
NNE	4.6E-06	9.1E-07	4.3E-07	2.6E-07	1.8E-07	8.9E-08	3.4E-08	1.7E-08	1.1E-08	7.8E-09
NE	3.4E-06	6.9E-07	3.3E-07	2.0E-07	1.4E-07	6.8E-08	2.6E-08	1.3E-08	8.4E-09	6.1E-09
ENE	2.4E-06	4.8E-07	2.3E-07	1.4E-07	9.7E-08	4.7E-08	1.8E-08	9.2E-09	5.9E-09	4.2E-09
E	1.9E-06	3.9E-07	1.8E-07	1.1E-07	7.8E-08	3.8E-08	1.5E-08	7.3E-09	4.7E-09	3.3E-09
ESE	2.9E-06	6.0E-07	2.8E-07	1.8E-07	1.2E-07	6.0E-08	2.3E-08	1.2E-08	7.5E-09	5.3E-09
SE	4.4E-06	8.9E-07	4.2E-07	2.6E-07	1.8E-07	8.8E-08	3.4E-08	1.7E-08	1.1E-08	7.8E-09
SSE	4.2E-06	8.6E-07	4.1E-07	2.5E-07	1.8E-07	8.6E-08	3.3E-08	1.7E-08	1.1E-08	7.7E-09
S	3.1E-06	6.2E-07	2.9E-07	1.8E-07	1.3E-07	6.1E-08	2.3E-08	1.2E-08	7.4E-09	5.3E-09
SSW	3.0E-06	6.1E-07	2.9E-07	1.8E-07	1.2E-07	6.0E-08	2.3E-08	1.2E-08	7.4E-09	5.3E-09
SW	2.2E-06	4.3E-07	2.0E-07	1.2E-07	8.6E-08	4.2E-08	1.6E-08	7.9E-09	5.0E-09	3.6E-09
WSW	1.8E-06	3.5E-07	1.6E-07	9.9E-08	6.9E-08	3.3E-08	1.3E-08	6.3E-09	4.0E-09	2.9E-09
W	1.9E-06	3.5E-07	1.6E-07	9.9E-08	6.9E-08	3.3E-08	1.2E-08	6.1E-09	3.9E-09	2.8E-09
WNW	1.9E-06	3.6E-07	1.7E-07	1.0E-07	7.0E-08	3.4E-08	1.3E-08	6.3E-09	4.0E-09	2.8E-09
NW	2.9E-06	5.7E-07	2.7E-07	1.6E-07	1.1E-07	5.6E-08	2.1E-08	1.1E-08	6.7E-09	4.8E-09
NNW	4.3E-06	8.8E-07	4.2E-07	2.6E-07	1.8E-07	8.8E-08	3.4E-08	1.7E-08	1.1E-08	7.9E-09

This page intentionally left

DISTRIBUTION

MSIN

U.S. EPA, Region 10

1200 Sixth Avenue

Seattle, WA 98101

J. KenKnight (5)

R. W. Poeton

D. Zhen

OAQ-107

OEA-095

OAQ-107

Washington State Department of Health

Air Emissions and Defense Waste Section

Division of Radiation Protection

111 Israel Road SE

Tumwater, WA 98501

A. W. Conklin (5)

M. M. Dunkelman

Washington State Department of Health

Division of Radiation Protection

Air Emissions and Defense Waste

309 Bradley Blvd., Suite 201

Richland, WA 99352

F. T. Adams

S. L. Clark

J. R. Culmer

E. W. Fordham

T. P. Frazier

G. L. Laws

P. J. Martell

J. W. Schmidt

Washington State Department of Ecology

J. A. Hedges

B5-18

U.S. Environmental Protection Agency

B. Shroff

6608J

USEPA Headquarters

Ariel Rios Building

1200 Pennsylvania Avenue NW

Washington, D.C. 20460

U.S. Department of Energy-Headquarters

A. C. Lawrence

A. Wallo III (3)

G. A. Vazquez

EH-4

EH-41

EH-412

MSINU.S. Department of Energy-Headquarters

Germantown, Maryland 20874-1290

Barry Parks

U.S. Department of Energy

Office of Science (SC-83)

19901 Germantown Road

Confederated Tribes of the Umatilla Indian Reservation

Richland Office of Science and Engineering

750 Swift Boulevard, Suite 12

Richland, WA 99352

S. Harris, Director

Nez Perce Tribe

Environmental Restoration and Waste Management

P. O. Box 365

Lapwai, ID 83540

G. Bohnce

Yakama Indian Nation

Environmental Restoration Waste Management Program

P.O. Box 151

Toppenish, WA 98948

R. Jim

U.S. Department of Energy-Office of River Protection

D. W. Bowser

H6-08

G. M. Neath

H6-08

U.S. Department of Energy-Pacific NW Site Office

T. L. Aldridge

K8-50

U.S. Department of Energy-Richland Operations Office

T. W. Ferns

A5-15

W. M. Glines

A6-39

J. B. Hebdon

A5-15

E. V. Hiskes

A4-52

R. M. Irwin

A5-19

M. F. Jarvis (5)

A5-15

M. K. Marvin

A4-52

R. S. Ollero

A6-39

B. M. Pangborn

A5-17

L. D. Romine

A6-33

D. C. Ward

A2-17

W. C. Woolery

AG-33

DOE-RL Public Reading Room

H2-53

Bechtel National, Inc.

L. Bostic

H4-20

J. F. Brown

H4-20

B. L. Curn

H4-20

R. D. Haggard

H4-20

J. S. Hill

H4-20

MSINCH2M HILL Hanford Group, Inc.

L. E. Borneman	T6-16
T. L. Faust	S5-03
J. D. Guberski	R1-51
M. N. Jaraysi	H6-03
J. J. Luke	H6-03
C. J. Kemp	S7-83
P. C. Miller	R1-51
L. L. Penn	H6-03
J. A. Voogd	H6-03

Duratek Federal Services, Inc.

J. J. Dorian	H1-11
M. C. Dorsey	H1-11
S. M. McKinney	H1-11
R. M. Mitchell	H1-11
C. J. Perkins	H1-11

Fluor Hanford, Inc.

B. M. Barnes	T4-09
J. A. Bates	H8-12
M. W. Bowman	S6-72
H. C. Boynton	T4-52
R. C. Brunke	H8-40
L. R. Campbell	A3-05
W. G. Cox	T3-10
A. K. Dasgupta	S3-28
L. P. Diediker (10)	H8-13
B. J. Dixon	R3-32
D. L. Dyekman	H8-13
M. E. Eby	N2-57
R. H. Engelmann	H8-12
D. E. Faulk	T4-04
L. L. Fritz	H8-12
M. F. Hackworth	T4-51
N. A. Homan	H8-13
G. S. Hunacek, Jr.	X3-79
J. E. Hyatt	H8-40
M. T. Jansky	H8-40
A. R. Johnson	H5-26
R. E. Johnson	H8-13
G. J. LeBaron	S4-49
P. W. Martin	T3-28
D. P. Mullen	T5-02
R. W. Oldham	T3-10
J. K. Perry	H8-40
J. A. Querin	S3-28
D. G. Ranade	N1-26
D. E. Rasmussen	L1-04
D. J. Rokkan (50)	H8-13

	<u>MSIN</u>
F. M. Simmons	H8-40
D. G. Saueressig	T4-04
D. E. Schoepflin	T3-28
R. T. Stordeur	L6-05
R. W. Szelmeczka	S6-72
G. J. Warwick	S3-30
D. J. Watson	X3-79
J. A. Winterhalder	E6-35
T. T. Winward	X3-79
 <u>Lockheed Martin Services, Inc.</u>	
DPC	H6-08
EDMC (2)	H6-08
J. N. Diven	G3-28
X. S. Si	G3-29
 <u>Pacific Northwest National Laboratory</u>	
R. L. Aaberg	K3-54
B. G. Anderson	J2-25
E. J. Antonio	K3-54
B. P. Atencio	J2-25
B. C. Barfuss	J2-25
J. M. Barnett	J2-25
R. L. Dirkes	K6-75
B. G. Fritz	K6-75
R. W. Hanf, Jr.	K6-75
A. K. Ikenberry	J2-25
G. W. Patton	K6-75
T. M. Poston	K6-75
K. Rhoads	K3-54
S. F. Snyder	K3-54
L. H. Staven (2)	K3-54
H. T. Tilden II	K3-75
R. S. Weeks	K3-75
PNNL Reference Library	P8-55
 <u>Washington Closure Hanford, LLC</u>	
J. W. Donnelly	X0-17
R. G. Egge	X5-50
J. W. Golden, Jr.	L1-04
D. L. Johnson	L1-09
R. J. Landon	H9-03
N. C. Little	L1-09
R. R. Nielson	X5-50
D. E. Rasmussen	L1-09
J. E. Rugg	T2-03
J. G. Woolard	H9-03