

1221495



HARTCROWSER

Earth and Environmental Technologies

Final Draft

Copy No. 13

*RCRA Interim Status Assessment
Part A Facilities
PUREX Facility*

J-1866-33.04

Cross Ref with: 0003608

Add Milestone: M-020-00

1221495



HARTCROWSER

Earth and Environmental Technologies

Final Draft

Copy No. 13

*RCRA Interim Status Assessment
Part A Facilities
PUREX Facility*

J-1866-33.04

Cross Ref with: 0003608

Add Milestone: M-020-00




Department of Energy

Richland Operations Office
P.O. Box 550
Richland, Washington 99352

Ms. Christine Gregoire
State of Washington
Department of Ecology
Mail Stop PV-11
Olympia, Washington 98504

Mr. Robie Russell
U.S. Environmental Protection Agency
Region 10
1200 Sixth Avenue
Seattle, Washington 98101

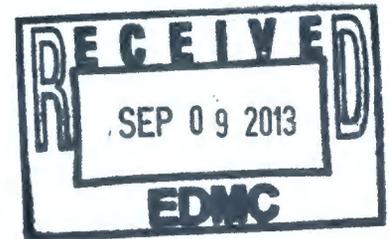

Dear Ms. Gregoire and Mr. Russell:

HANFORD ENVIRONMENTAL SELF-ASSESSMENT REPORT

Enclosed is a Hanford self-assessment report of facility environmental status against Resource Conservation and Recovery Act (RCRA) requirements. This report reflects the Department of Energy, Richland Operations Office (DOE-RL) and Westinghouse Hanford Company (WHC) self-initiated program to assess and comply with the letter and spirit of applicable environmental regulations at the Hanford Site.

This report presents the results of an internal and ongoing assessment of Hanford facility compliance with environmental regulations. In some areas, it calls out areas of potential noncompliance with regulations. Many of these areas are procedural and simply require a change in the manner of conducting operations to ensure compliance. Some areas represent potential changes that are more difficult to make and may require extensive planning, budgeting and operational changes. In all cases, DOE-RL and WHC are committed to implement the appropriate changes and conduct operations in compliance with all applicable environmental regulations.

Findings represent conditions and conclusions derived on the date of the self-assessment as indicated in each report. The WHC with DOE-RL concurrence has moved expeditiously to correct problems as they were identified during the assessment and will continue to do so in the future. The enclosure to this letter includes an action schedule for items identified in the report.

Ms. Gregoire and Mr. Russell

-2-

The action schedule identifies the specific action to be taken and the completion date for all conclusions in the report.

This self-assessment is viewed by DOE-RL and WHC as healthy, productive, and supportive of DOE-RL and WHC commitment to environmental compliance. We believe that providing this assessment to you will strengthen our relationship and should be looked upon as a positive commitment from Hanford.

Sincerely,

ERD:ADK

R. D. Izatt, Director
Environmental Restoration Division
Richland Operations Office

Enclosure

R. E. Lerch, Manager
Environmental Division
Westinghouse Hanford Company

cc: w/encl.
R. E. Lerch, WHC

ACTION SCHEDULE REPORT LEGEND

SUA Identification: The stream, unit, or activity (SUA) identification.

Reg Citation: The regulatory requirement applicable to a specific stream, unit, or activity.

Status: The compliance status of a stream, unit, or activity with respect to a specific applicable regulation.

C: Complete: The task identified with a given report finding is complete.

AR: Action Required: An action is required to address a given report finding.

NR: Not Regulated: The SUA is currently not regulated under the associated applicable regulation.

Task Description: A description of the task resulting from an assessment finding.

**Scheduled
Comp Date:** The date by which a given task is scheduled to be completed.

**Actual
Comp Date:** The date by which an action was performed.

ACTION SCHEDULE

NOVEMBER 1988

SUA Identification	Reg Citation	Status	Task Description	Scheduled Comp Date	Actual Comp Date
PUREX TSD TANKS/ANCILLARY EQUIPMENT	WAC 173-303-300	AR	COMPLETE DEVELOPMENT OF DETAILED WASTE ANALYSIS PLAN, INCLUDE TK-F15 AND EF-11 CONCENTRATOR.	06/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-300	AR	CONFIRM IN WASTE ANALYSIS PLAN THAT WASTE IS COMPATIBLE WITH EQUIPMENT AND SECONDARY CONTAINMENT.	06/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-300	AR	INCLUDE IN WASTE ANALYSIS PLAN A RATIONALE FOR PROPER WASTE MANAGEMENT.	06/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-300	AR	DETAIL IN WASTE ANALYSIS PLAN ANALYTICAL PROCEDURES AND QA/QC PROGRAM.	06/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-310	AR	POST "DANGER UNAUTHORIZED PERSONNEL KEEP OUT" SIGNS AT CANYON ENTRANCES.	01/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-320	AR	DEVELOP INSPECTION PLAN FOR TSD UNITS, SUMPS, ANCILLARY EQUIPMENT, EMERGENCY & SAFETY EQUIPMENT. INCLUDE INSPECTION FREQUENCY & CHECKLISTS. PLACE RECORDS IN CENTRAL FILE.	10/31/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-320	AR	RESOLVE ALARA/RCRA INCONSISTENCY RELATIVE TO PHYSICAL TANK INSPECITON.	05/30/89	/ /

ACTION SCHEDULE

NOVEMBER 1988

SUA Identification	Reg Citation	Status	Task Description	Scheduled Comp Date	Actual Comp Date
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-330	AR	ENSURE ENGINEERING, PLANNING AND MAINTENANCE STAFF THAT WORK WITH OR DIRECT HAZARDOUS WASTE WORK ARE TRAINED.	03/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-330	AR	ENSURE TRAINING RECORDS FOR PAST EMPLOYEES ARE MAINTAINED FOR 3 YEARS.	03/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-350	AR	DEVELOP DETAILED RESPONSES TO EMERGENCIES THAT COULD OCCUR AT TSD UNITS. (E.G., LEAKING JUMPERS OR TANKS).	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-350	C	ARRANGEMENTS WITH LOCAL AUTHORITIES ARE IDENTIFIED IN SITE EMERGENCY PLAN.	03/01/88	03/01/88
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-350	AR	ADD A LIST OF EMERGENCY COORDINATORS AND ALTERNATES TO CONTINGENCY PLAN.	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT	WAC 173-303-350	AR	ADD EMERGENCY EQUIPMENT LIST/DESCRIPTION AND DETAILED EVACUATION PLAN TO CONTINGENCY PLAN.	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-360	AR	ENSURE EMERGENCY COORDINATORS AND ALTERNATES ARE INTIMATELY FAMILIAR WITH REVISED CONTINGENCY PLAN.	03/30/89	/ /

ACTION SCHEDULE

NOVEMBER 1988

<u>SUA Identification</u>	<u>Reg Citation</u>	<u>Status</u>	<u>Task Description</u>	<u>Scheduled Comp Date</u>	<u>Actual Comp Date</u>
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-360	AR	TRAIN EMERGENCY COORDINATORS AND ALTERNATES IN EMERGENCY PROCEDURES AS THEY RELATE TO TREATMENT TANKS.	03/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-360	AR	INCORPORATE SPILL CONTROL PROCEDURES INTO SHUTDOWN PROCEDURES OR BOTH INTO CONTINGENCY PLAN.	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-360	AR	INCLUDE ALL PERMITTED TANKAGE IN SHUTDOWN PROCEDURE.	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-360	AR	INCLUDE NOTIFICATION REQUIREMENTS IN SHUTDOWN PROCEDURES OR CONTINGENCY PLAN.	04/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-380	AR	ADD TO RECORDS SYSTEM: INSPECTION LOGS, TRAINING PLAN AND RECORDS, CONTINGENCY PLAN, AND WASTE ANALYSIS PLAN. ADD CLOSURE PLAN WHEN AVAILABLE.	06/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-390	AR	INCLUDE TANK G-7 IN ANNUAL REPORT.	03/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-395	AR	DEMONSTRATE IN WASTE ANALYSIS PLAN THAT INCOMPATIBLE WASTES/MATERIALS ARE NOT COMMINGLED OR THAT THERE IS NO ADVERSE REACTION.	06/30/89	/ /

ACTION SCHEDULE

NOVEMBER 1988

SUA Identification	Reg Citation	Status	Task Description	Scheduled Comp Date	Actual Comp Date
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	WAC 173-303-395	AR	TANKS ARE NOT ACCESSIBLE, DETERMINE APPROPRIATENESS OF LABELS AT ALTERNATE LOCATIONS.	03/30/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART G.	AR	CLOSURE PLAN DEVELOPMENT IS CONTINGENT ON TRI-PARTY AGREEMENT	09/30/92	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART H.	AR	DETERMINE APPLICABILITY OF 173-303-620 (1)(C).	10/27/88	10/27/88
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART J.	NR	PROVIDE COMPATIBLE SECONDARY CONTAINMENT FOR TANKS U3, U4, F15, F16, AND F18 OR RATIONALE AS TO ADEQUACEY OF EXISTING CONTAINMENT.	/ /	/ /
PUREX TSD TANK/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART J.	NR	EVALUATE NEED FOR LEAK DETECTION IN PIPE TRENCH BETWEEN 241-A-151 DIVERSION BOX AND FACILITY.	/ /	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART J.	AR	DEVELOP INSPECTION PLAN AND PROVIDE FOR DAILY INSPECTION OF PERMITTED UNITS (INCLUDE TANK INSTRUMENTATION).	10/31/89	/ /
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART J	AR	RESOLVE RCRA/ALARA INCONSISTENCY RELATIVE TO PHYSICAL INSPECTION OF TANKS.	05/30/89	/ /

ACTION SCHEDULE

NOVEMBER 1988

<u>SUA Identification</u>	<u>Reg Citation</u>	<u>Status</u>	<u>Task Description</u>	<u>Scheduled Comp Date</u>	<u>Actual Comp Date</u>
PUREX TSD TANKS/ANCILLARY EQUIPMENT.	40 CFR 265 SUBPART J.	AR	TANKS ARE NOT ACCESSIBLE, DETERMINE APPROPRIATENESS OF LABELS AT ALTERNATE LOCATION.	03/30/89	/ /

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



HARTCROWSER

Earth and Environmental Technologies

Final Draft

Copy No.

***RCRA Interim Status Assessment
Part A Facilities
PUREX Facility***

***Prepared for
Westinghouse Hanford Company***

***September 21, 1988
J-1866-33.04***



HARTCROWSER

Hart Crowser, Inc.
1910 Fairview Avenue East
Seattle, Washington 98102-3699
206.324.9530

Earth and Environmental Technologies

J-1866-33.04

September 21, 1988

Westinghouse Hanford Company
Post Office Box 1970
Richland, Washington 99352

Attn: Mr. David Hutchison

Re: RCRA Interim Status Assessment
Part A TSD Facilities
PUREX Facility

Our report on the RCRA Part A TSD Facility Assessment for PUREX is enclosed. The report presents our understanding of the current compliance status of the facility, as well as recommendations for improving compliance with the applicable federal and state dangerous waste treatment, storage, and disposal (TSD) regulations. The report also presents regulatory guidance for each of the specific sections of dangerous waste regulations that the facility was assessed against.

The assessment was limited to the facility and practices directly associated with the TSD units identified in the PUREX RCRA Part A permit application. The facility and practices were assessed relative to the interim status TSD requirements noted specifically in the report. The facility and practices were not assessed relative to dangerous waste generator or generator accumulation requirements. Regulatory analysis of the facility was not performed.

The conclusions and recommendations in this report are based on information provided to the authors from several sources. Since it was beyond the scope of this project to independently confirm all information provided, there exists the possibility that portions of the information are incorrect, incomplete, or out of date. For example, although a facility operating manual may state that a certain practice is accomplished, we did not actually observe the facility operations to confirm that the specific practice is performed.



Westinghouse Hanford Company
September 21, 1988

J-1866-33.04
Page 2

Our conclusions and recommendations are based on our understanding and experience with the federal and state dangerous waste regulations. The conclusions and recommendations should not be construed as legal opinions. Consult legal council for more definitive compliance conclusions.

Sincerely,

HART CROWSER, Inc.

William B. Abercrombie
WILLIAM B. ABERCROMBIE
Senior Hazardous Waste Specialist

Eric B. Egbers

ERIC B. EGBERS
Program Technical Director

WBA/EBE:sde
LC186604/JOBS

Enclosure

J-1866-33.04

CONTENTS

	<u>Page No.</u>
GENERAL REQUIREMENTS FOR DANGEROUS WASTE MANAGEMENT FACILITIES WAC 173-303-280	1
REQUIRED NOTICES WAC 173-303-290	4
GENERAL WASTE ANALYSIS WAC 173-303-300	5
SECURITY WAC 173-303-310	10
GENERAL INSPECTION WAC 173-303-320	13
PERSONNEL TRAINING WAC 173-303-330	17
PREPAREDNESS AND PREVENTION WAC 173-303-340	23
CONTINGENCY PLAN WAC 173-303-350	28
EMERGENCIES WAC 173-303-360	34
MANIFEST SYSTEM WAC 173-303-370	38
FACILITY RECORDKEEPING WAC 173-303-380	40
FACILITY REPORTING WAC 173-303-390	44
OTHER GENERAL REQUIREMENTS WAC 173-303-395	47
SITING STANDARDS WAC 173-303-420	51
PERFORMANCE STANDARDS WAC 173-303-430	52
BUFFER MONITORING ZONES WAC 173-303-440	54
GROUNDWATER MONITORING 40 CFR 265 SUBPART F	56
CLOSURE 40 CFR SUBPART G	58
FINANCIAL REQUIREMENTS 40 CFR 265 SUBPART H	69
TANKS 40 CFR 265 SUBPART J	71

GENERAL REQUIREMENTS FOR DANGEROUS WASTE
MANAGEMENT FACILITIES
WAC 173-303-280

REGULATIONS AND REQUIREMENTS

General Requirements

The general requirements for dangerous waste TSD facilities note two specific requirements.

- o The facility must be operated in a manner which does not present an imminent or substantial hazard to the public health or the environment.
- o The facility is required to apply for an EPA/state identification number from the regulatory agency.

The requirement to operate the facility in a manner which does not threaten human health or the environment is purposely general so that the agencies can use the requirement as a broad, enforcement tool. If other, more specific regulations can not be applied to a situation where the agency feels a threat exists, this general facility requirement can be used. This requirement is satisfied primarily by preventing or minimizing activities on the site which have a potential to expose the public or the environment to dangerous wastes.

Identification Number

The TSD facility EPA/state identification number is obtained by completing a Washington state notification of dangerous waste activities form, Form No. 2, and submitting the form to the Washington State Department of Ecology. The information requested on the form includes:

- o Name and address of the party handling the dangerous waste;
- o The type of dangerous waste activities;
- o Facility contact persons at the facility;
- o Identification of the dangerous wastes handled at the facility; and
- o The estimated quantity of dangerous wastes handled.

The identification number is used on the annual reports that a TSD facility must submit each year and on manifests which a facility may use to transfer wastes off site.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility must satisfy the general requirements for dangerous waste management facilities.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the general dangerous waste management practices at the PUREX facility was determined through interviews of the facility personnel and a tour of the facility.

The Hanford Site is considered a single site and has received a single EPA/state identification number.

Dangerous wastes are treated in Tanks TK-E5, TK-F15, TK-F16, TK-F18, TK-G7, TK-U3, TK-U4, and concentrator E-F11. The wastes are treated to make them more amenable for storage at the 200 area Tank Farms.

CONCLUSIONS AND RECOMMENDATIONS

- o Other than the specific deficiencies identified in the following sections, the PUREX Treatment Tanks are operated in a manner that pose no imminent or substantial threat to the environment.

REQUIRED NOTICES

WAC 173-303-290

REGULATIONS AND REQUIREMENTS

There are three specific types of notices required of TSD dangerous waste facilities.

- o The Department of Ecology must be notified at least four weeks prior to the TSD facility receiving dangerous waste from a source outside of the United States.
- o The owner/operator of the TSD facility is required to notify any new owner/operator of the dangerous waste regulations, Chapter 173-303 WAC.
- o The TSD facility owner/operator must inform any generator of dangerous waste who ships its waste to the TSD facility that the facility has the appropriate permits to receive the wastes.

Since most of the Hanford Site does not receive wastes from off site, the required notices requirements generally do not apply to the Hanford facilities. The Radioactive Mixed Waste Storage facility, however, may receive dangerous wastes from off site and, thus, would be subject to the notification requirements. The facility would also be required to notify any new operator of the Hanford Site if, in the future, the site operations are assumed by someone other than WHC.

APPLICABILITY

The PUREX facility does not receive dangerous waste from off site. Nor does the facility ship dangerous wastes off site. Thus, the notification requirements are not applicable to the PUREX facility.

GENERAL WASTE ANALYSIS

WAC 173-303-300

REGULATIONS AND REQUIREMENTS

Waste Analyses Requirements

The waste analysis requirements assures that the TSD facility has sufficient understanding of the dangerous wastes to properly treat, store, or dispose of them. The waste analysis requirements include the following:

- o The owner/operator must obtain a detailed chemical, physical, and/or biological analysis of the wastes prior to its management. The analysis must provide the parameters necessary to assure that the material is properly handled. An understanding of the facility processes may be used as an alternative to testing if such knowledge is sufficient to meet the intent of the waste analyses requirements.
- o The wastes must be reexamined if the wastes or the processes generating the wastes change.
- o A written waste analysis plan is required which presents the specific parameters that the waste will be analyzed for, the rationale for selecting the parameters, sampling and test methods, and the frequency with which the initial waste analysis will reviewed or repeated. The plan must be maintained in the facility operating record.
- o If wastes are received from off-site, procedures are required to ensure that the wastes received are as anticipated. (Since most of the Hanford Site does not receive wastes from off-site, this requirement is not applicable for most Hanford facilities.)

The waste analysis requirement is an important step toward effective and safe waste handling procedures. The waste analysis requirements is not simply a recordkeeping system for analytical data. The facility operator must carefully examine the precise function and nature of the TSD operations to formulate a suitable wastes analysis program.

Waste analysis is necessary for a proper closure plan. An understanding of the wastes is necessary to determine effective methods to remove and/or treat the dangerous wastes and to decontaminate the facility. Similar requirements exist for post closure and ground water monitoring activities.

Content of the Waste Analyses Plan

Process Control and Monitoring The waste analysis plan must consider the wastes at all stages of the TSD processes where the wastes may differ from one stage to another. For example, a dangerous waste being treated in Tank E-5 should be analyzed before and after the treatment process. It should be analyzed prior to the process to ensure that the treatment is appropriate for the waste and does not result in a reactive or otherwise dangerous situation. The waste analysis should be accomplished after the treatment to ensure that the process is successful in effectively treating the waste.

The waste analysis plan must also identify tolerances that the wastes must meet in terms of specific parameters (i.e. measurable chemical or physical properties). The plan must show how the wastes are monitored to ensure that the specific tolerances are met. For example, consider a treatment tank that is designed to receive dangerous waste with a pH of about 3.0 and then butted up to a pH of about 12.0. The waste analysis plan must note the range of pH around the 3.0 and 12.0 target values. The plan must describe in detail how, when, and where the waste will be sampled and tested to ensure that the pH of the incoming and outgoing waste falls within the specified ranges.

Material Compatibility The waste analysis must show the compatibility between the wastes and all materials that come in contact with the wastes. For example, the compatibility between the wastes and any tank materials or secondary containment materials must be documented as a result of the waste analysis program.

Representative Sampling The waste analysis plan must note specifically how representative samples of the wastes will be obtained. Information that must be provided includes:

- o Methods to ensure that the samples properly represent the range of the characteristics of the wastes;
- o Sampling techniques; and
- o Sampling equipment.

Quality Assurance and Quality Control The waste analysis plan must detail the quality assurance/quality control program that ensures that all of the waste analysis information is technically defensible and properly documented. The QA/QC program should address:

- o The number of samples and sample blanks required for statistical completeness;
- o Preparation, maintenance, and cleaning of containers and equipment;
- o Certification of any laboratories used;
- o Chain-of-custody procedures and proper sample handling;
- o Laboratory testing methods approved by the EPA or state regulatory agency and justifications if non-approved methods are used;
- o Health and safety protocols; and

- o Proper methods of data compilation, review, and presentation.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility is required to prepare and implement a waste analysis program for the dangerous wastes managed on-site. The program must be detailed within a written waste analysis plan.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the waste analysis plan and program at the PUREX facility was determined from facility personnel interviews and review of the facility operating record.

The PUREX facility has drafted a waste analysis plan specific to their waste management units, with the exception of Tank TK-F15 and the E-F11 concentrator. Analyses are performed for a variety of reasons, i.e., process control, Tank Farms acceptance, accountability, and specific element tracking. Sampling procedures are described in addition to the sampling frequency.

CONCLUSIONS AND RECOMMENDATIONS

- o (Waste Analysis) Obtain a detailed waste analysis of the waste treated in all PUREX waste management tankage.
- o (Waste Analysis) Confirm through the waste analysis that the wastes in the treatment tanks are compatible with the tank materials and containment structures.

- o (Waste Analysis) Provide a rationale that is specific to ensuring that the wastes are being properly managed.
- o (Waste Analysis Plan) Develop a detailed waste analysis plan which describes the waste analysis program. Include all PUREX waste management tankage.
- o (Waste Analysis Plan) Detail the specific analytical procedures used for waste analysis.
- o (Waste Analysis Plan) Detail the quality assurance and quality control (QA/QC) as it relates to sample collection and laboratory analysis.

SECURITY
WAC 173-303-310

REGULATIONS AND REQUIREMENTS

Active Portion Security

All TSD facilities must have sufficient security to prevent unknowing entry and to minimize unauthorized entry of people and/or animals to the active portions of the facility. The active portion of a facility is considered the dangerous waste management unit such as a specific tank, container area, or landfill unit within the facility. Transfer areas such as loading and unloading docks are also considered an active portion of the facility. The specific features required of the security system include:

- o Signs around the active portions of the facility; and either
 - o A 24-hour surveillance system; or
 - o Artificial or natural barriers with controlled access.

Signs

The signs around the active portions of the facility are required to satisfy the following:

- o The sign must clearly note the danger associated with the TSD unit and that unauthorized people are not allowed. At a minimum, the sign must read "Danger-unauthorized personnel keep out".
- o The sign must be legible from a distance of at least 25 feet.

- o A sufficient number of signs must be placed around the active portion of the facility so that a sign is visible from any approach.
- o The sign must be in English as well as any other language predominant in the area around the TSD facility.

24 Hour Surveillance

A 24-hour surveillance system should immediately identify any attempted or inadvertent entry into the active portion of the facility. Continuously monitored closed circuit TV systems and 24-hour guard service are typical types of 24-hour surveillance systems.

Artificial or natural barriers with controlled access points can also be provide security. Artificial barriers are considered to items such as 6-foot or higher lockable fences with gates, building enclosures, and high energy force fields. Natural barriers are such items as rivers, lakes, and steep hillsides. Controlled access points are points where entry and exit to the facility is closely controlled such as lockable or continuously patrolled gates or doors.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, security around these units must satisfy the TSD security requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status and condition of the security around the PUREX treatment tanks was determined from interviews of the facility personnel, a tour of the facility, and observation of the units, via photographs.

Access to the PUREX facility is controlled by the overall Hanford Site security. Access to the PUREX canyon is restricted by the locked entrance to the PUREX facility and a locked entrance to building 202-A which houses the canyon. The treatment tanks are located in reinforced concrete cells which are covered by thick, massive concrete cover blocks. Signs warning of the danger and instructing unauthorized people not to enter are not posted around the entrance to the canyon or on the cover blocks.

CONCLUSIONS AND RECOMMENDATIONS

- o (Signs) Post signs that bear the legend "Danger - Unauthorized Personnel Keep Out" at the entrances to the canyon or on the concrete cover blocks. Post a sufficient number of signs so that one is visible from any approach to the units.

- o The control over access to the facility and the individual units is adequate.

GENERAL INSPECTION

WAC 173-303-320

REGULATIONS AND REQUIREMENTS

Inspection Program

Facilities which treat, store, or dispose dangerous wastes must develop and implement a detailed inspection program. A written inspection plan must be developed and maintained in the facility operating records and must address both general and unit specific inspection requirements. The general inspection requirements refer to inspection of the portions of the TSD facility other than the actual TSD container, tank, landfill, etc. units. Unit specific inspection requirements are presented as part of the individual container, tank, landfill, etc. requirements.

The general facility inspection program must consider these items:

- o Safety equipment such as emergency eye wash stations, protective shields, first aid equipment, and respirators;
- o Emergency equipment such as spill control supplies, fire extinguishers, emergency lights, generators, and fire alarms;
- o Monitoring equipment such as thermostats, fire detection equipment, level, pressure, and flow transducers;
- o Security equipment such as fences, signs, lights, and locks;
- o Communication equipment such as radios, intercoms, closed circuit TV systems, and public address systems;

- o Other general facility items such as building floors, walls, roofs, elevators, ramps, and vehicles.

Detailed Inspection Plan

The inspection plan should note in great detail what specific items are to be inspected, when they are to be inspected, and what is to be checked for on each item. The level of detail required in an inspection plan is typically underestimated. It is not sufficient to simply "check the closed circuit TV system," as an example. Rather, each of the cameras should be checked for clarity, mobility, and focusing. Each receiving unit should be checked for cleanliness, picture quality, and picture adjustments. The inspection should reflect all elements which are necessary for the proper functioning of the item.

Inspection Records Records of the inspections must be maintained. At a minimum, the logs must note:

- o The date and time of the inspection;
- o The printed name and signature of the inspector;
- o Notations of the observations made; and
- o The date and nature of any action required as a result of the inspection.

The inspection logs must be maintained in the facility operating records for at least three years.

Checklists Typically, checklists guide the inspection of particular items. The checklists should reflect the level of detail required of the inspections. The checklists should give specific guidance on what to check on each item, how to inspect it, and how to note any deficiencies.

Commonly, the inspection checklists serve as the inspection log and include space to note any responses to problems observed during the inspection.

Frequency of Inspections The frequency of the inspections depend on the specific nature and function of the item being inspected. Equipment which continuously prevents dangerous wastes from spilling or leaking should be inspected daily. Equipment which is used only in the case of an emergency, likely needs to be inspected monthly. In general, the more a failure of a piece of equipment poses a threat to the environment or human health, and the more frequently the item is required to perform its function, the more often it should be inspected. Equipment which is inspected less often should be subjected to a more rigorous inspection.

Unit Specific Inspections Unit specific inspection requirements are presented in the respective sections addressing landfills, tanks, and container requirements. Additional inspection requirements for facilities that handle ignitable or reactive dangerous wastes are discussed in the Other General Requirements section.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility must satisfy the general inspection requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the general inspection program at the PUREX facility was determined through interviews of the facility personnel and review of the facility operating record.

A written inspection plan (General Surveillance Procedure) does exist for the PUREX facility. The surveillance checklist does not, however, include the waste management units.

CONCLUSIONS AND RECOMMENDATIONS

- o (Inspection Plan) Develop a written inspection plan which incorporates the waste management units, sumps, and ancillary equipment. Additionally, include emergency equipment, personal safety equipment, and the frequency with which inspections are accomplished.
- o (Checklists) Develop inspection checklists for each of the inspections.
- o (Inspection Records) Maintain the inspection plan, checklists, and other information relative to the inspections, in the facility dangerous waste file.

PERSONNEL TRAINING

WAC 173-303-330

REGULATIONS AND REQUIREMENTS

Training Program

All employees at a TSD facility who are directly associated with the management of dangerous waste must successfully complete a training program which ensures the facility's compliance with the dangerous waste regulations. The regulations define "facility personnel" as

"All persons who work at, or oversee the operations of a hazardous waste facility, and whose actions or failure to act may result in noncompliance with the requirements (of the regulations)."

The training elements include:

- o The proper methods of handling dangerous wastes in the facility;
- o The proper response to emergencies and implementation of the contingency plan; and
- o Instructors knowledgeable in proper dangerous waste management procedures relative to the specific facility.

New employees should undergo training within 6 months of employment and must be supervised by a trained person until training has been successfully completed. Annually, each employee must review the training program. The facility operating file must include a written training plan and records of each employees completion of the training.

Training Alternatives The regulations offer alternatives for specifically how the training requirements can be met. The training can be accomplished through a formal course presented either in the facility or by instructors from outside the facility. Alternatively, the training can be accomplished by on-the-job training (OJT) instruction from facility supervisors. It is common for the facility supervisors to attend a course taught by instructors from outside the facility and then to return to the facility to instruct the remaining facility personnel.

The specific elements in the training course should be directed toward the specific wastes, units, and activities at the TSD facility. The training program should address how the types of wastes, units, and management activities relate to the following:

- o The chemical characteristics and associated hazards of the dangerous wastes handled at the facility;
- o Maintenance, inspection, and use of the facility emergency response and monitoring equipment;
- o Proper implementation of the contingency plan including response to a leak, spill, fire, explosion, or groundwater contamination incident;
- o Proper operation, inspection, and maintenance of waste feed cutoff systems;
- o Proper operation, inspection, and maintenance of the facility communication equipment; and
- o Shut down of operations.

For example, the training program should include instruction in how to verify if a tank automatic cutoff system is properly working and how to operate it manually, if necessary.

Instructors The training instructor must have thorough knowledge of the dangerous waste regulations and how they relate to the specific nature of the facility and dangerous wastes handled at the facility. Given the ultimate responsibility of the training instructor, it is desirable if the instructor is specifically trained in the field of dangerous waste management. On-the-job training is best taught by the facility supervisor since that person is generally in the best position to judge whether an individual has displayed sufficient skills and knowledge to perform required tasks.

New Employees Each employee required to receive the training must do so within the first 6 months of employment at the facility. Until the training is received, the employee must work under the direct supervision of an individual that has received the training. Thereafter, each employee must complete an annual review of the training, at a minimum. If the facility or facility operations change or if the nature of the wastes handled at the facility change, the employees must be retrained.

Training Plan

A training plan documenting the training program must be prepared and included in the facility operating record. The plan should show in detail the specific training procedures and how the training requirements are met at the particular TSD facility. Specifically, the plan must include the following for each position related to the management of dangerous wastes at the TSD facility:

- o Job title and description;
- o Name of employee filling the position;
- o Requisite skills, education, and experience;

- o Detailed, written description of the type and amount of training required for the position including course outlines, handouts, exams, etc.; and
- o Documentation showing that the required training, both initial training and annual reviews, has been received within the required time period.

Training Records

Records showing that the training requirements are being satisfied must be maintained in the facility operating records. The training plan should be maintained permanently in the files. Documentation regarding individual employee's completion of the required training must be maintained for at least three years after the employee's last day at the facility. The records should be detailed and complete and include the dates of each employee's training and the courses attended. They should allow an inspector to quickly determine that the facility is meeting the training requirements.

APPLICABILITY

The PUREX facility has been identified as a waste treatment facility in the Part A permit application. Thus, the PUREX facility must satisfy the training requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the training program at the PUREX facility was determined through interviews of the facility operators and review of the facility operating record.

Each operator at the PUREX facility is required to complete course 006G concerning general hazardous waste training. This course includes general dangerous waste management practices, dangerous waste characteristics, and response to emergencies. In addition, the operators complete course 006H, On-The-Job Training (OJT), which consists of learning each of the facilities operating procedures. The PUREX Training Plan also requires each operator to become proficient in all duties through familiarization with the unit-specific operation procedures contained in the Headend Training Manual and Central Control Training Manual, as appropriate. This training includes a testing and certification program prior to being allowed to conduct unsupervised operations at the facility.

The training program is completed within the first six months of employment. Annual updates consist of the 006H OJT course. Operator certification is renewed every two years or when changes occur to the operation.

Field records of the employees training are maintained in the facility operating file. The PUREX training officer also has access to a computer "soft copy" of operator training. Complete training records are kept at 2101M building. The length of time that past employee training records are kept at the facility was unknown.

Operation and laboratory personnel have received appropriate training. Some of the engineering, planning, and maintenance staff are not up to date with the training requirements. Regulations require hazardous waste training only for those individuals that actually work with hazardous waste or those individuals that direct people that work with hazardous waste.

CONCLUSIONS AND RECOMMENDATIONS

- o (Training Program) Ensure that engineering, planning, and maintenance personnel that work with hazardous waste or direct people that work with hazardous waste receive appropriate training.

- o (Training Plan) Although not specifically required in the regulations, compile all training information, course outlines, training schedules, and job descriptions in a single binder labeled "Hazardous Waste Training Plan".

- o (Training Records) Ensure that training records for past employees are maintained at the facility for at least three years.

PREPAREDNESS AND PREVENTION

WAC 173-303-340

REGULATIONS AND REQUIREMENTS

Preparedness and Prevention Requirements

Dangerous waste TSD facilities must be designed, constructed, maintained, and operated to minimize the possibility of a release of dangerous waste to the environment. Regulations directed toward satisfying this general requirement are presented in terms of four general requirements:

- o Required equipment;
- o Access to communication equipment and alarms;
- o Aisle space; and
- o Arrangements with local authorities.

Required Equipment

- o An internal communication system;
- o An external communication system, such as a telephone, capable of summoning emergency aid;
- o Portable fire control equipment, fire extinguishers, spill control equipment, and decontamination equipment; and
- o Water at sufficient pressure and volume to supply the water hoses, sprinkler systems, foaming equipment, etc.

Internal Communication The internal communication system must allow immediate notification to all employees of any emergency and to inform them of the proper evacuation. The system should also immediately notify emergency response personnel within the facility as to the location and nature of the emergency. Typical internal communication systems include alarms with varying tones, intercom systems, and public address systems. This equipment must be located so that personnel have immediate access, either directly or by visual contact with someone with immediate access, wherever dangerous wastes are being handled.

External Communication External communication systems are required to be able to immediately notify emergency response personnel from outside the facility. In particular, the system should notify the local police and fire departments or local or state response teams as to the location, nature, and extent of the emergency situation. Typically, external communication systems consist of a telephone which is able to call the emergency response personnel. The telephone should be available at the control room or a main office. If only one person is in the facility when it is operating, that person must have immediate access to the external communication system (i.e. a hand held radio phone if the individual is not stationed near a phone).

Fire and Spill Control Equipment The facility's fire control equipment should be based on the specific nature of the TSD activities occurring at the site and the associated potential fire hazards. If the wastes handled require a particular method of fire control (special foams, inert gas, dry chemicals, etc.), that type of equipment should be maintained at the facility. Similarly, the type of spill control equipment (e.g. pumps, vacuums, absorbants, etc.) at the facility should reflect the particular nature of the materials that could potentially spill. The equipment should be stored at the facility near the location where its use would be anticipated.

Water System The water system at the facility must provide adequate water pressure and volume to meet any emergency. The facility sprinkler system,

if present, should be designed for the anticipated water pressure and volumes.

Aisle Space The TSD facility must maintain adequate aisle space within the facility to allow the movement of emergency equipment and personnel within the facility. Adequate space should be provided to inspect the units within the facility, move maintenance and emergency equipment to areas where it could be necessary, and allow evacuation of the facility.

Consultation With Emergency Aid Agencies

Local agencies that may respond to an emergency at the TSD facility should be consulted to exchange information and make arrangements between the TSD facility and the agencies. Such relationships should particularly be developed with the local police and fire departments, local hospitals, and state emergency response teams. Specific information that should be provided to the local police and fire departments and emergency response personnel include:

- o Layout of the facility;
- o The types, nature, amount, location, and hazards associated with the dangerous wastes handled at the facility;
- o Areas in the facility where personnel are typically working;
- o Entrances into the facility; and
- o Evacuation routes.

Information for local hospitals include the types of dangerous wastes handled at the facility and the associated health dangers associated with the wastes. The health dangers should include burns and the effects of inhalation, skin contact, ingestion, etc.

Where outside agencies decline to enter into such agreements with the TSD facility, their refusal should be documented and noted in the facility operating record.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the facilities Part A permit application. Thus, the facility must satisfy the preparedness and prevention requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the preparedness and prevention of the PUREX facility was determined through interviews of the facility personnel and a tour of the facility.

Emergency equipment such as fire extinguishers, spill control kits, and respirators are located in several areas within the PUREX facility. This equipment is not located immediately adjacent to the treatment tankage, however, the cells are equipped with a fire deluge system. Due to the remote nature of the tankage within the cells, spillage is routed to cell sumps and jetted to TK-F18. Heat sensors are located within the cells which, when activated due to a fire, will activate the fire deluge system. The fire deluge system can also be activated manually within the P&O gallery.

An internal phone and paging system is located throughout the PUREX facility. The crane operator maintains communications via a hand held radio, telephone, and PAX phone.

The Hanford Fire Department has been notified of the general nature of the materials handled at the PUREX facility. Specific information regarding the wastes at the TSD units, location of the TSD units, and the specific

hazards associated with the TSD units have been communicated to the fire department. The Hanford Site has general agreements with local hospitals and police departments. These agreements are not specific to the individual facilities on the Hanford Site such as PUREX.

CONCLUSIONS AND RECOMMENDATIONS

- o Based upon the remote nature of the treatment tankage, and the emergency equipment located on-site, the PUREX facility appears in general compliance with the preparedness and prevention requirements.

CONTINGENCY PLAN

WAC 173-303-350

REGULATIONS AND REQUIREMENTS

Contingency Plan Requirements

Dangerous waste TSD facilities must develop procedures to effectively address emergencies. The procedures should lessen the impact on human health and the environment if fires, explosions or releases of dangerous wastes to the environment occur. The emergency procedures to be followed in the TSD facility must be presented in a contingency plan. The contingency plan must include the following:

- o A detailed description of the specific actions to be taken if specific emergencies occur;
- o A description of the arrangements made with local agencies which might be required to respond in the event of an emergency;
- o A current list of the emergency coordinator(s) including work and home phone numbers and address;
- o A list of all emergency equipment and its location at the facility; and
- o An evacuation plan for the facility personnel.

Content of the Contingency Plan

Detailed Responses to Emergencies The contingency plan must present detailed instructions to facility personnel on what specific actions to take in the event of specific emergencies. The nature of the TSD facility,

its dangerous wastes management units, and the specific activities which occur in each of the units as well as other portions of the facility need to be considered in postulating what potential emergencies could occur.

Once the potential emergencies are identified, detailed and specific responses to those emergencies must be developed and presented. The contingency plan should be written as instructions to the facility personnel for their use during an emergency. The plan should not be a generic, standard discussion of what to do in the case of an emergency. Simply stating that "If you observe a spill, clean it up" does not satisfy the requirements of a contingency plan. Examples of the level of unit/event specific instructions are required are as follows:

If you observe a leak in the sidewalls of Tank A take the following steps:

- Alert the emergency coordinator
- Turn off valve B to stop inflow into tank
- Confirm that the flow has been stopped by observing flow meter C
- Turn on pump D to empty tank
- Confirm that the tank is emptying by observing the level indicator on the tank
- Turn on sump pump E to empty the tank containment area. This must be accomplished within 24 hours or when first practicable.

Authority During Emergencies The plan must also include detailed discussions of who has what authority at what time. For example, the facility emergency coordinator could have the authority over a fire until the fire fighting crews arrive. Then the fire chief assumes prime responsibility.

Agreements With Local Authorities The contingency plan should document all of the arrangements and agreements that have been made with local agencies. These agreements would be those required by the preparedness and prevention requirements (WAC 173-303-340) and include local fire departments, police departments, and local emergency response teams. The nature of the agreements should be provided so that roles and

responsibilities in the event of specific types of emergencies can be determined. Copies of the contingency plans are required to be provided to the local agencies with which the facility has agreements.

List of Emergency Coordinators The list of emergency coordinators in the contingency plan must be complete and current. Since the plan will be used as an instruction manual in the event of an emergency, it must be clear from the plan who the emergency coordinator is and how to contact that person.

List of Emergency Equipment The contingency plan must include a list of all of the emergency equipment at the facility. This equipment is noted in the preparedness and prevention requirements (i.e. fire extinguishers, spill control equipment, communication systems, etc.). The plan should list all of the equipment available, its location within the facility, and a physical description of each item. The use(s) and capabilities of the equipment should also be provided. A plot plan is an excellent way to show the location of the emergency equipment. Again, the information should be presented in a manner which helps the facility and emergency personnel effectively respond to specific emergencies in the facility.

Evacuation Routes Emergency evacuation routes and procedures must be presented in detail in the contingency plan. Methods to communicate the proper routes under specific emergency situations should also be documented. For example, different types of alarms could signify which specific evacuation route is appropriate in particular emergencies.

Filing and Modifying the Contingency Plan

A copy of the contingency plan must be maintained in the facility operating record. It should be easily available to inspectors so that they can quickly determine if the facility plan satisfies the contingency plan requirements.

The contingency plan must be amended if it fails during an emergency, if applicable regulations change, if the facility or facility operations change, if the emergency coordinators change, or if the list of emergency equipment changes.

APPLICABILITY

The PUREX facility has been identified as a TSD treatment facility in the Part A permit application. Thus, the PUREX facility must develop and maintain a written contingency plan on site.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the PUREX contingency plan was determined through interviews with facility personnel and review of the facility operating records.

The PUREX facility does not have a contingency plan specific to dangerous waste treatment tanks located on-site. However, the operation procedures and the Facility Prefire Plan document many of the items required in the contingency plan. PUREX personnel are currently in the process of developing a detailed contingency plan specific to dangerous waste TSD units at the facility.

The Facility Prefire Plan provides detailed procedures to follow in the event of a fire at the PUREX facility. The plan lists emergency fire equipment at the site but it does not list the locations, physical description, or capabilities of the equipment.

Detailed procedures to follow in the event of a leak or spill are not contained in the operation procedures provided for review. The operation procedures state that if a leak or spill occurs to shut down operations and notify the supervisor. The procedures do provide details on how to remove

spilled material from the cell sumps but procedures to follow to replace a leaking jumper or tank and to identify where a leak is coming from are not contained in the documents reviewed.

The documents reviewed for this assessment did not contain the following additional items required for contingency plans:

- o A discussion of who has what authority during an emergency involving a dangerous waste tank;
- o Documentation of the agreements and arrangements made with local authorities, including arrangements with the Hanford Fire Department and any mutual aid agreements with public emergency response agencies;
- o A list of emergency coordinators including home addresses and phone numbers; and
- o Evacuation routes and procedures.

CONCLUSIONS AND RECOMMENDATIONS

- o (Contingency Plan) Although it is not specifically required by the regulations, the contingency plan for dangerous waste management at the PUREX facility should be pulled together into a single, stand-alone, document for easy reference and to ease compliance reviews by the regulatory agencies;
- o (Contingency Plan Content) Include detailed emergency responses specific to each emergency that could reasonably occur at the facility. Include procedures for replacing leaking jumpers or tanks. This includes specific and detailed response activities that will be conducted by the Hanford Fire Department, PUREX personnel, and/or other emergency responders that may be involved;

- o (Contingency Plan Content) Include in the contingency plan documentation of arrangements with local authorities made in response to the preparedness and prevention requirements in WAC 173-303-340. This is to include arrangements with local fire departments, police departments, hospitals, and emergency response teams as well as documentation of the arrangements with internal Hanford Site emergency responders. In each case specific roles and responsibilities are to be identified for each type of emergency. Local authorities with which the facility has agreements must be supplied with a copy of the facility contingency plan;

- o (Contingency Plan Content) Include a list of the emergency coordinator and alternates including names, home addresses, home phone numbers, beeper numbers, etc., sufficient to allow for 24 hour contact with the emergency coordinator or a designated alternate. Each emergency coordinator must have intimate knowledge of operations involving dangerous waste at the facility and they must have the authority to commit needed resources in the event of an emergency;

- o (Contingency Plan Content) Include a list of all emergency equipment, the quantity available on-site, the capacity and capabilities of all emergency equipment, the location of emergency equipment at the facility, and a physical description of each item; and

- o (Contingency Plan Content) Include a detailed evacuation plan that describes the requirements for its use, evacuation signals, routes, and alternative routes.

EMERGENCIES
WAC 173-303-360

REGULATIONS AND REQUIREMENTS

Emergency Requirements

Dangerous waste TSD facilities must satisfy specific, requirements in the event of an emergency at the facility. These requirements are directed toward minimizing any hazards to human health or the environment resulting from the emergency. Although the contingency plan is to provide facility specific instructions in the event of specific types of emergencies, the general emergency requirements present particular responses that are required of all facilities during all emergencies.

The Emergency Coordinator

The emergency coordinator identified in the contingency plan must have the authority to commit the necessary resources to respond to an emergency. Thus, the coordinator is typically one of the senior individuals within the facility. The emergency coordinator should be an individual who is closely involved with the day-to-day dangerous waste management activities at the facility. The coordinator must be knowledgeable in:

- o The facility contingency plan;
- o The location and properties of all dangerous wastes handled at the facility;
- o The location of all records within the facility; and
- o The layout of the facility.

Either the emergency coordinator, or an alternate coordinator who meets the above requirements and who reports to the emergency coordinator, must be on site at all times the facility is operating. Specific procedures should be documented regarding how an alternate coordinator remains in contact with the primary coordinator when the primary coordinator is off site.

The regulations note specific requirements that the emergency coordinator and owner/operator must satisfy in the event of an emergency. The emergency coordinator, in addition to any other activity required by the facility contingency plan, must immediately:

- o Activate alarms and communication systems and notify state and local response teams if their help is necessary;
- o Identify the nature and extent of any release, fire, or explosion;
- o Assess any potential hazards to human health or the environment resulting from the emergency;
- o Report any potential threat to the area outside the facility to the appropriate local authorities and help determine if the area needs to be evacuated;
- o Take all reasonable measures to stop any releases, fires, or explosions and ensure that they do not re-occur or spread;
- o Properly treat, store, or dispose of any wastes recovered from spills or releases generated during the emergency; and
- o Clean, repair, or replace any emergency equipment used or damaged by the emergency and ensure that it is in good working order before resuming operations.

Notification and Reports

The owner/operator must notify the regulatory agencies that the facility equipment has been properly cleaned, repaired, or replaced before resuming operations. The owner/operator must also prepare a written report which includes the following:

- o Name, address, and phone number of the facility and the owner/operator;
- o Date, time, and type of emergency;
- o The types and quantities of materials involved in the emergency;
- o The extent of any injuries;
- o An assessment of any hazards to human health or the environment due to the emergency;
- o The amount and disposition of any material recovered from releases during the emergency; and
- o Cause of the emergency and corrective actions taken to prevent a similar incident reoccurring.

The report must be submitted within 15 days of the emergency.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility is required to comply with the procedures set forth in WAC 173-303-360, Emergencies.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the emergency procedures and responsibilities at the PUREX facility was determined from facility personnel interviews and review of the facility operating records.

The PUREX facility does not at this time have emergency procedures specific to all of the waste management units. These specific shutdown procedures address only Tanks TK-E5, TK-F18, TK-G7 and Cells G, H, J, K, and R.

The PUREX plant manager is the designated emergency coordinator.

CONCLUSIONS AND RECOMMENDATIONS

- o (Emergency Coordinator) Ensure that the emergency coordinator and alternates are intimately familiar with the contents of the facility contingency plan, location and properties of all wastes managed, and the location of all records pertinent to the management of the waste.
- o (Emergency Procedures) Develop and train the emergency coordinator and alternates in the emergency procedures as they relate to the treatment tanks. Have the emergency coordinators attend the dangerous waste training courses 006G, 006S, and 2340 EP/APC. Alternatively, develop a facility-specific training program to instruct the emergency coordinators.
- o (Emergency Procedures) Incorporate emergency procedures for spill control into the shutdown procedures.
- o (Emergency Procedures) Include all waste management tankage in the shutdown procedures documents.
- o (Emergency Procedures) Include agency notification requirements in the emergency shutdown procedures.

MANIFEST SYSTEM
WAC 173-303-370

REGULATIONS AND REQUIREMENTS

Dangerous waste facilities that receive waste from off-site are required to adhere to specific manifest practices. These manifest practices include signing procedures, recordkeeping, methods to handle discrepancies, and reasons and methods to refuse a shipment.

The Hanford Site rarely receives shipments of dangerous wastes from off-site. Thus, the manifest requirements are not typically applicable to the assessment of Hanford Site facilities. If, however, shipments of dangerous wastes are received from off-site for treatment or disposal, manifest requirements would apply and the facility personnel must:

- o Sign and date each copy of the manifest;
- o Note any discrepancy within the manifest information or between the manifest information and the shipment;
- o Provide the transporter a signed copy of the manifest;
- o Return a signed copy of the manifest to the generator; and
- o Retain a signed copy of the manifest in the facility operating file.

If a discrepancy is noted in the manifest, it must be immediately reconciled and clarified with the generator and/or transporter. A written report to regulatory agency explaining the discrepancy is required if the conflict is not resolved within 15 days.

APPLICABILITY

The PUREX facility does not receive dangerous waste from off site. Thus, the manifest requirements in WAC 173-303-370 do not apply to the PUREX facility.

FACILITY RECORDKEEPING

WAC 173-303-380

REGULATIONS AND REQUIREMENTS

Facility Recordkeeping Requirements

Dangerous waste TSD facilities must maintain complete and accurate records of all dangerous waste management activities that have occurred at the site. The record system should document all dangerous waste activities and allow easy reconstruction of past dangerous waste management practices. Particularly, the records should be such that an inspector from a regulatory agency can quickly determine whether the facility is operating in compliance with the dangerous waste regulations.

Required Records

Specific items that should be included in the facility records as a minimum are:

- o Records of the amount and nature of dangerous wastes treated, stored, or disposed at the facility including dates, source, final disposition, methods, etc.;
- o Records of where (what units within the facility) specific wastes have been, or are, treated, stored, or disposed;
- o Waste analysis results including laboratory test results, waste designation narratives, and any petitions regarding waste designation that have been submitted;

- o Contingency plan, emergency reports, and records associated with past emergency situations at the facility;
- o Inspection logs and records of follow up actions as well as results from inspections by outside inspectors;
- o Groundwater monitoring data and testing results; and
- o Closure and post-closure plans and cost estimates.

Waste Identification

Records which document the nature of the wastes and their management must describe the waste by its common name and by its dangerous waste number. The TSD management method codes must also be provided. For example, a waste corrosive liquid treated in a tank would be referred to as T01 (management code for treatment in a tank) of a D002 (corrosive) waste.

Records Location and Access

The facility dangerous waste records should be maintained in a single location separate from the general facility records so that they can be easily found and reviewed. Although it is not required by the regulations, it is recommended that a duplicate of the dangerous waste records be maintained in a separate location in case the originals are destroyed. The records must be retained at least until closure of the facility.

The records should be maintained under the control of a select few individuals within the facility. Unauthorized personnel should not be allowed access to the dangerous waste records. The records must be available for inspection upon request by the regulatory agencies.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the facility must satisfy the TSD recordkeeping requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the PUREX facility recordkeeping practices was determined through interviews of the facility personnel and a brief review of the existing dangerous waste files at the PUREX facility.

Dangerous waste records such as copies of the Part A permit application, inspection logs, training documentation, and tank treatment and transfer data are located in various files around the facility.

CONCLUSIONS AND RECOMMENDATIONS

- o (Records Location and Access) Although it is not required by the regulations, maintain all records pertaining to the management of dangerous wastes in a single file (dangerous waste file). Develop a systematic approach to properly file all relevant information so that it can be easily retrieved.
- o (Records Location and Access) Although it is not required by the regulations, have the file under the control of only one or two people.
- o (Required Records) In addition to the existing TSD records currently maintained in various locations around the facility, include the following dangerous waste information in the single file:
 - Inspection logs of the treatment tanks;

- Training plan and documentation;
- Contingency plans including both the site plan as well as plans specific to the PUREX facility;
- Waste analysis data on the wastes in the tanks; and
- Closure plans as they are developed for the PUREX facility.

FACILITY REPORTING

WAC 173-303-390

REGULATIONS AND REQUIREMENTS

Reporting Requirements

The owner/operator of a dangerous waste management facility must submit reports on various activities at the facility. In particular the following reports are required:

- o Reports documenting unmanifested dangerous waste shipments;
- o Annual reports; and
- o Other additional reports.

Unmanifested Shipments

Facilities must report dangerous waste shipments received from off site without an accompanying manifest. Since the Hanford Site rarely receives dangerous waste from off site, the Hanford Site facilities do not typically have cause to submit this type of report.

Annual Reports

By March 1 of each year, dangerous waste TSD facilities must submit annual reports which document the dangerous waste activities at the facility for the previous calendar year. A particular form, Form 5, available from the regulatory agency, is to be used to develop the annual report. Specific

information relevant to the Hanford Site facilities that is required on the form includes:

- o The EPA/state identification number, name, and address of the facility;
- o The amount and nature of all dangerous wastes treated, stored, or disposed at the facility using the dangerous waste numbers;
- o The methods of treatment, storage, or disposal used at the facility using the dangerous waste handling codes; and
- o The most recent closure and post-closure cost estimates.

The Hanford Site submits a single annual report for the entire site. The report includes the TSD activities at each of the individual facilities. The individual facilities submit their annual information to the preparers of the overall Hanford Site annual report.

Other Reports

Other reports which may be required of the TSD facilities include reports documenting emergency situations as required in the emergency regulations and any other report that the regulatory agencies require on a case-by-case basis.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the facility must satisfy the reporting requirements.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the PUREX facility reporting practices was determined through interviews of the facility operators and review of the Hanford Site 1987 Annual TSD Facility Dangerous Waste Report specific to PUREX.

1987 waste volumes pertinent to the treatment tankage includes:

TK-E5	403,000 gallons
E-F11	7,420,000 gallons
TK-F15/F16	135,000 gallons
TK-F18	648,000 gallons
TK-U3/U4	392,000 gallons

The omission of TK-G7 was due to its late use within the year.

The information in the annual report is consistent with the information noted in the other documents reviewed.

The annual report did not include cost estimates for closure of the facility.

CONCLUSIONS AND RECOMMENDATIONS

- o Although it is not required for federal facilities under interim status, include cost estimates for closure of the treatment tanks in the annual report.
- o (Annual Report) Include TK-G7 in the annual report.

OTHER GENERAL REQUIREMENTS

WAC 173-303-395

REGULATIONS AND REQUIREMENTS

General requirements that apply to dangerous waste TSD facilities include:

- o Precautions for ignitable, reactive, or incompatible wastes;
- o Labeling for tanks and containers;
- o Relationships with other environmental laws and regulations;
- o Loading and unloading areas; and
- o Storage time limits for impoundments and piles.

Ignitable and Reactive Wastes

The special requirements that pertain to ignitable or reactive wastes apply to wastes which are designated as such by the dangerous waste designation procedures. Specifically, any wastes meeting the characteristics described in WAC 173-303-090(5) or -090(7) are subject to these requirements. The special requirements applicable to ignitable or reactive wastes are:

- o Ignitable or reactive wastes must be separated from sources of ignition such as open flames, sparks, heat, etc.;
- o "No Smoking" signs must be placed wherever ignitable or reactive wastes are being handled; and
- o The facility must be inspected annually by a person knowledgeable in the Uniform Fire Code.

In general ignitable, reactive, or incompatible wastes and materials must be handled in a manner that does not:

- o Generate extreme heat, pressure, fire, explosion or violent reactions;
- o Produce uncontrolled gases or dusts that are toxic, flammable, explosive or otherwise threaten human health or the environment; or
- o Damage the structural integrity of the facility or unit containing dangerous waste.

Satisfying the ignitable, reactive, or incompatible waste general requirements typically includes the facility accomplishing the following:

- o Identification of any ignitable, reactive, or incompatible wastes handled within the facility;
- o Identification of potential scenarios and methods that may result in incompatible wastes being combined;
- o Identification of sources of ignition or reaction within the facility;
- o An analyses of handling methods and units storing ignitable, reactive, or incompatible wastes relative to the above items; and
- o An analyses of treatment methods and units used to render the waste nonignitable, unreactive, or compatible.

Identification of Ignitable, Reactive, or Incompatible Wastes The identification of any ignitable, reactive, or incompatible wastes should be made an integral part of the waste analyses plan. The plan should consider the nature of the wastes at intermediary steps in any treatment processes to determine the ignitibility, reactivity, or incompatibility. All materials which come into contact with the wastes should be considered to determine any potential for incompatibility between the wastes and the

materials. An example might be the compatibility between the waste and the secondary containment floor materials.

The dangerous waste activities and processes should be reviewed to identify ways that incompatible wastes may inadvertently be allowed to mix. These include tank contents which may inadvertently mix within a cell sump.

Sources of Ignition Sources of ignition may consist of other than open flames and heat. Equipment and tools used around ignitable or reactive wastes should be constructed of non-sparking materials. Ignitable wastes should be segregated from wastes which generate significant amounts of heat when exposed to common materials such as water or air. Sources of static electricity should be avoided and tanks and containers should be grounded.

Annual Fire Inspection The purpose of the annual fire inspection is to confirm that the facility is designed and operated in conformance with the Uniform Fire Code. The regulations require that facilities that handle ignitable wastes be designed, constructed, and operated in general accordance with the Uniform Fire Code. The annual inspection must be performed by a professional person who is knowledgeable of the code. The local fire marshall or a facility engineer with a background in fire codes typically satisfy this criteria. The inspection should also include checking for practices which present potential for causing fires or explosions.

Tank and Container Labels

Tanks and containers must be marked with a label which notes the contents and the major risks associated with the wastes. Specific requirements are provided in the technological standards for each of the specific types of units.

Other Requirements

Other general requirements note how the dangerous waste regulations relate to other environmental laws. Other laws include those pertaining to the Clean Water Act, Toxic Substances Control Act, and Clean Air Act. Particular requirements for loading and unloading areas and storage time limits for impoundments and piles are also presented.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility must satisfy the requirements of WAC 173-303-395.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the facility practices pertaining to the other general requirements was determined through interviews of the facility operators and a tour of the facility.

The treatment tanks are not marked with a label.

CONCLUSIONS AND RECOMMENDATIONS

- o (Ignitable, Reactive or Incompatible Wastes) In accordance with the waste analyses plan and operating procedures, demonstrate that incompatible wastes and materials are not commingled. Alternatively, document that the commingling of incompatible waste and material does not threaten human health or the environment.

- o (Tank Labels) Label the cover blocks overlying the tanks.

SITING STANDARDS

WAC 173-303-420

REGULATIONS AND REQUIREMENTS

Dangerous waste TSD facilities must meet specific standards regarding the physical location of the facility. The siting standards generally address minimum distances that TSD facilities must be from surface waters, public facilities, drinking water supplies, and other sensitive features. Facilities may not be located in earthquake sensitive areas or a floodplain.

The specific siting standards are currently being significantly revised and rewritten. The final form of the siting standards can not, at this time, be anticipated. Thus, it is not possible to assess facilities relative to the dangerous waste facility siting criteria.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility may be subject to future siting requirements.

PERFORMANCE STANDARDS

WAC 173-303-430

REGULATIONS AND REQUIREMENTS

The general performance standards allow for the regulatory agencies to apply, on a case by case basis, standards that are more stringent than those specifically presented in the regulations. The general performance standards require that dangerous waste TSD facilities must be designed, constructed, and maintained in a manner that prevents degradation of human health or the environment. Specific areas of environmental damage noted in the regulations include:

- o Groundwater and surface water quality;
- o Air quality;
- o Slope and soil instability;
- o Flora and fauna;
- o Aesthetics of public or adjoining lands; and
- o Excessive noise.

The general performance standards also require that the facility treat or recycle waste material as much as economically feasible.

In essence, the general performance standards allow the regulatory agency to control the operations at a TSD facility even if no specific regulation (other than the general performance standards) is being violated. By citing the general performance standards and identifying a "threat to human health or the environment," the agency can undertake enforcement action to correct the source of the threat. Thus, the general performance standards

require that, above all else, the owner/operator identify facility specific practices that, although may not fail any specific TSD requirement, could present a threat to human health or the environment.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the PUREX facility must satisfy the performance standards.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the facility practices pertaining to the performance standards was determined through interviews of the facility operators and a tour of the facility.

Other than the deficiencies noted elsewhere in this report, no evidence of improper practices that pose a threat to the environment or human health were observed. No recent releases of dangerous waste to the environment were reported by the facility operators.

CONCLUSIONS AND RECOMMENDATIONS

- o The facility is designed and is being operated in general accordance with the performance standards.

BUFFER MONITORING ZONES
WAC 173-303-440

REGULATIONS AND REQUIREMENTS

Ignitible or Reactive Wastes

Dangerous waste TSD facilities that handle ignitible or reactive wastes are required to maintain specific minimum distances between the TSD units and public ways, streets, and property lines. In particular, facilities treating or storing ignitible wastes in tanks must meet buffer zones specified by the National Fire Protection Association Code. The specific reference for the NFPA requirements is discussed in the guidance for tanks.

Explosive Wastes

The regulations also present buffer zone requirements for dangerous wastes that are explosive. Treatment or storage of these wastes must be provided buffer zones equivalent to the Uniform Fire Code's American Table of Distances for Storage of Explosives, Table 77-201, 1979 edition.

New Land Based Facilities

The buffer zone requirements also present minimum distances that new land based TSD units are required to meet. The minimum distance is based on the travel time of the wastes from the active portion of the facility to the nearest down gradient well or surface water used for drinking water. The travel times must be longer than 3 years for DW wastes and 10 years for EHW wastes. These buffer zone requirements will likely be changed by the new siting standards currently being developed.

APPLICABILITY

The PUREX facility is not currently managing ignitable or reactive waste. Therefore this regulatory section is not applicable.

GROUNDWATER MONITORING
40 CFR 265 SUBPART F

REGULATIONS AND REQUIREMENTS

Dangerous waste TSD facilities with land based units must monitor the groundwater in the area of the facility. The following are considered land based units:

- o Landfills;
- o Surface impoundments;
- o Waste piles; and
- o Land treatment units.

Furthermore, tanks which are unable to be "clean closed" (no contamination remaining after closure) must be closed as a landfill and also require a groundwater monitoring program.

The responsibility for the groundwater monitoring program at the Hanford Site is currently outside the authority of the operators of the individual facilities. Furthermore, the groundwater monitoring programs currently existing at the Hanford Site are not necessarily accomplished on an individual facility basis. Since this assessment project is directed toward the individual facilities and individual facility operators, an assessment of the facilities relative to the groundwater monitoring requirements is considered outside the scope of this project.

Elements of a Groundwater Monitoring Program

The groundwater monitoring program should include the following components:

- o Hydrological characterization of the area surrounding the facility;
- o Designing a groundwater monitoring network;
- o Developing and documenting proper monitoring well installation and construction methods;
- o Accomplishing a field inspection program to ensure quality assurance and quality control; and
- o Developing methods to properly sample, test, and report the results of groundwater quality monitoring.

APPLICABILITY

The PUREX Treatment Tanks are not land TSD units. Thus, the groundwater monitoring requirements will apply only if the treatment tanks can not be "clean closed". Whether the tanks can be "clean closed" will be determined when the facility closure plan has been developed.

CLOSURE
40 CFR SUBPART G

REGULATIONS AND REQUIREMENTS

Closure Requirements

When dangerous waste TSD facilities are shutdown or taken out of service, they must be properly "closed". Closures of TSD facilities are usually aimed at cleaning up all hazardous wastes at the facility and restoring facility to an uncontaminated condition. When it is not possible to remove all dangerous wastes (referred to as "clean closure"), the owner/operator must undertake post closure care of the facility site.

Performance Standard The regulations set forth a closure performance standard that applies to all facilities. This performance standard requires the owner/operator to close the facility in a manner that:

- o Minimizes the need for further maintenance;
- o Controls, minimizes or eliminates releases of dangerous wastes after closure to protect public health and the environment; and
- o Complies with the specific closure requirements for individual waste management units (e.g., containers, tanks) set forth elsewhere in the regulations.

For listed and characteristic dangerous waste, clean closure must be to background environmental levels. For other types of dangerous wastes, the contamination must be removed to a certain level depending on the contamination and other factors.

The general intent behind the performance standard is to ensure, to the maximum extent possible when a facility is closed, that it will pose no or minimal risk to people and the environment after closure. Clean closure is considered by the regulatory agencies to be the best way to achieve this standard. Even when clean closure is not possible, the same general principle of no or minimal risk will usually guide the agencies' reviews and comments on a facility's closure activities. The focus in these cases will be on minimizing risk to people and the environment, and on setting up the post closure care program such that the facility will continue to pose no or minimal risk during and after the post closure care period.

Notifications The owner/operator must notify Ecology and EPA in writing at least 60 days before the date closure of a land disposal unit (surface impoundment, waste pile, land treatment, or landfill unit) is expected to begin. Forty five days notice is required for all other closures.

Once a unit or facility has managed the last volume of hazardous waste, the owner/operator will have 90 days to treat, remove or dispose on-site all hazardous wastes in accordance with the closure plan, and 180 days to complete the remaining closure activities specified in the closure plan. Longer time periods for disposition of hazardous wastes and completion of all other closure activities can be allowed if Ecology and EPA approve them. Within 60 days after closure is completed for a land disposal unit or for an entire facility, the owner/operator must submit a written Certification of Closure to Ecology and EPA.

Closure Plan Requirements

The device for accomplishing the closure requirements and performance standard is the closure plan. The owner/operator must prepare a written closure plan and submit it to Ecology and EPA as part of the facility Part B permit application.

Closure plans are typically very detailed. The closure plan must take into account all of the different types of waste management units and activities associated with those units when discussing the efforts that will be conducted to close. In addition, certain units (e.g., surface impoundments and tanks without secondary containment) must have contingent post closure plans in the event that intended clean closure cannot be performed.

The closure plan must describe, in detail, the steps necessary to achieve full closure at any point during the facility's active life. This will usually result in the closure plan assuming a worst case scenario, where full closure might have to be conducted with the maximum amount of hazardous waste present on-site, and when the greatest level of waste management activities is occurring.

The closure plan must include at least the following information:

- o A description of how each tank area at the facility will be closed to achieve the closure performance standard;
- o A description of how final closure of the tank area will be conducted to achieve the closure performance standard;
- o An identification of the maximum amount of wastes treated in the tanks that will be ongoing at any given time during the facility's active life (worst case closure scenario);
- o Descriptions of the methods for remediating the facility during closure, including at least:
 - Removal, transport, storage (temporary and/or permanent), treatment, and disposal (off site and on site, where applicable) of hazardous wastes;
 - Identification of the type(s) of off site waste receiving facilities, where applicable;

- Steps needed to remove or decontaminate hazardous materials (wastes, constituents and residues) such as the tank, ancillary equipment, concrete cell structure and soils that may be contaminated; and
 - Sampling and analysis that will be used to determine the extent of decontamination needed to meet the closure performance standard.
- o A schedule for closure of the treatment tanks, including at least the total time needed and for intervening activities so that closure progress can be tracked.

When preparing the closure plan contents described above, the owner/operator must account for, in detail, the activities that will actually need to be conducted to close the facility. Closure can be broken down into the following general activities:

Material Removal

- Sampling
- Analysis
- Remediation
- Facility Reclamation

Materials Staging and Disposition

- Containment
- Preparation for Disposal
- Transport
- Ensuring TSD Receipt

Closure Certification

- Records
- Reports

Specific discussions and guidance for each of these areas are provided in the following paragraphs.

Material Removal are all efforts oriented specifically to removing all hazardous wastes, waste constituents and residues from the facility which are not intended to be left behind after closure. This must include demolition materials, piping, and tankage. Decontamination measures, efforts to demonstrate clean closure and final condition of the facility upon closure must also be discussed.

Sampling activities must be directed to proving to Ecology and EPA that no hazardous materials (wastes, constituents and residues) will remain after closure of the tanks.

Analysis represents all of the different tests that will be performed to demonstrate that hazardous materials are not left after closure. It must also include chain of custody and QA/QC procedures.

Remediation provides a description of the efforts that will be undertaken to actually remove hazardous materials from the facility and remediate those areas where hazardous materials are not intended to remain. It will specify where and when analysis to check for clean closure will be performed. It will also specify worker, equipment and other decontamination procedures that will be followed.

Facility Reclamation should address all of the efforts that will be undertaken to return the facility to the appearance and uses of surrounding areas.

Materials Staging and Disposition should address all activities associated with containing and preparing, for final disposition, the wastes generated during closure. These materials will include concrete demolition debris, emptied tanks, and steam jets. The methods of transport, disposal practices, estimated volumes of hazardous materials to be disposed of, and disposal verification should be addressed.

Containment should describe how the various forms of containment (e.g., tank) will be provided for different types of hazardous materials

(including contaminated equipment) while closure is conducted. Hazardous waste containment procedures must be followed unless the wastes are shown to not be hazardous.

Preparation for Disposal will involve arranging for a disposal facility to receive the hazardous materials generated during closure.

Transport should provide a discussion of how off-site transport and disposal will actually be accomplished for materials that will be shipped off-site.

Ensuring TSD Receipt is primarily a matter of checking the hazardous waste manifests (or other documents if only on-site transport is involved) to confirm that the receiving TSD facility has accepted the hazardous materials.

Closure Certification will address those final activities necessary to document and demonstrate that the closure plan was followed and that the closure performance standard has been satisfied.

Records should be sufficient to technically support the certification of closure that must be submitted to the regulatory agencies.

Reports will essentially be all written communication with Ecology and EPA necessary to certify that closure has been performed in accordance with the approved closure plan and that the closure performance standard has been met.

The owner/operator must maintain the closure plan to ensure that it is current and accounts for the anticipated closure activities. The owner/operator must submit a request for modification of the permit to amend the closure plan when the facility operations change and change the closure procedures or the closure schedule changes.

Post Closure Requirements

A dangerous waste TSD facility must comply with the post closure requirements if hazardous waste remains at that facility after closure at levels in excess of the clean closure criteria. Post closure is a period of time (typically 30 years) after closure during which certain caretaking activities must occur. The regulations are directed toward land disposal units such as landfills where the dangerous wastes are anticipated to remain after the facility is shutdown. However, certain surface impoundments, tanks, and waste piles also need to have contingent post closure care even though it may be the intent to remove all wastes at closure.

Intent of Post Closure The general intent of the post closure care period is to allow for the detection of failures in the waste containment system after the facility has been closed. Such failures could be indicated by, for example, excessive cap settling, ground water contamination, or increasing leachate in the collection system. During the post closure care period, the owner/operator must ensure that the facility's post closure monitoring and maintenance activities are performed in a manner that will allow for detection of failures (and incipient failures) in the land disposal unit(s). Post closure use of the property must not disturb the integrity of the waste containment system (e.g., liners, caps) or the monitoring systems.

Notification Requirements When a land disposal unit or facility is closed, two notices must be given. The first required notice is a notice, including a survey plat, to the local land authority, and to Ecology and EPA. The second required notice is a notice in the deed to the property. The basic purpose of these notices is to ensure that the presence of hazardous wastes at the site is identified to future users and purchasers of the property, and to prevent potential disturbance of the disposal units by future activities at the site.

Post Closure Plan Requirements

The primary device for ensuring that the closed land disposal units are not disturbed, that monitoring is continued, and that maintenance of the closed unit(s) is timely and appropriate is the post closure plan. The post closure plan must be submitted to Ecology and EPA as part of the facility's permit application and, upon approval, becomes a condition of the permit. The plan must describe in detail the activities that will be conducted during the post closure care period, and must address the specific post closure requirements for each type of unit (e.g., waste pile, landfill).

For each disposal unit at a facility, the post closure plan must identify the activities (and frequency of those activities) that will be conducted after closure of the unit. The plan's contents must include at least:

- o Descriptions of the planned ground water monitoring activities and frequencies;
- o Descriptions of the planned maintenance activities and frequencies to ensure:
 - Integrity of the containment structures (e.g., cap);
 - Function of the facility monitoring equipment; and
- o The name, address, and phone number of the person or office to contact regarding the unit or facility during the post closure care period.

The post closure plan must be followed until the end of the post closure care period. At the end of post closure care for each disposal unit, the owner/operator must submit to Ecology and EPA a certification that post closure care was performed in accordance with the post closure plan.

When preparing the post closure plan for a unit or facility, the owner/operator should consider all of the activities that are likely to be

necessary to actually provide post closure care for the unit or facility. The following activities should be considered and, as appropriate, addressed in the plan.

Monitoring and Inspection

- Leachate
- Groundwater
- Containment System Integrity

Maintenance and Corrective Measures

- Containment Systems
- Monitoring Systems

The following paragraphs provide brief discussions of the types of considerations to include when addressing these activities in the post closure plan.

Monitoring and Inspection should identify all activities necessary to detect escape of hazardous wastes, constituents or residues into the environment, and to detect any breakdown in the integrity of the containment systems or the monitoring systems. Containment systems include liners, caps, covers, and in the case of land treatment units, the treatment zone itself.

Leachate may be generated during the post closure care period. The leachate collection system should be inspected for excessive leachate generation, failure of the leachate removal system, or other related problems that could indicate loss of hazardous materials (wastes, constituents, or residues) to the environment.

Groundwater monitoring must be conducted during post closure. The post closure plan should be in compliance with the state and federal ground water monitoring regulations. Inspection of the monitoring wells and locations should be conducted to ensure that they are maintained in good condition.

Containment System Integrity should be monitored and inspected to detect failures when they occur, and to identify signs of incipient failure so that preventive efforts can be undertaken prior to failure. Signs of potential failure to look for include: excessive settling of the cap; excessive erosion or loss of vegetation; damage to the cap from burrowing animals or plants; and, for land treatment, unexpected changes in the treatment zone.

Maintenance and Corrective Measures should specify the actions that will be taken in the event that the containment systems fail or may be failing, that the monitoring systems are not operating correctly, or that monitoring indicates potential escape of hazardous materials to the environment.

Containment Systems should be corrected if signs of failure or incipient failure occur, and should be maintained to prevent failure from becoming a potential problem. For example, maintenance and corrective measure for the containment systems might include: maintaining the vegetative cover; maintaining any security systems in place; replacing soils lost through erosion; and even digging up an entire cell to replace the liner system.

Monitoring Systems should be corrected if problems occur that compromise their operation, and maintenance and corrective measures should be planned for in the event that the monitoring systems indicate release of hazardous materials to the environment. For example, consideration should be given to what actions will be taken if: the leachate detection system fails; or, the ground water monitoring system detects hazardous constituents.

APPLICABILITY

The PUREX Treatment Tanks have been identified as TSD units in the Part A permit application. Thus, the tanks must be properly closed when they are taken out of service.

INFORMATION REVIEWED AND CURRENT STATUS

The current status of the PUREX facility closure plan was determined through interviews of the facility personnel.

Closure plans for the PUREX Treatment Tanks have not been written.

CONCLUSIONS AND RECOMMENDATIONS

- o (Closure Plan) Prepare a closure plan for the PUREX Treatment Tanks. Since the tanks have secondary containment, a contingent post closure plan is not required. All piping connected to the tanks must be included in the closure plan. Other points to consider in the plan are:
 - How to accommodate the radioactivity while performing the closure;
 - How to decontaminate or demolish and dispose of the thick concrete structure without spreading any contamination that might be on the concrete;
 - Chemical testing of the concrete to determine "clean closure" or to determine the level of contamination for disposal purposes; and
 - Confirmation sampling and testing of the soils beneath the vault floor to show that contamination has not passed through the floor.

FINANCIAL REQUIREMENTS

40 CFR 265 SUBPART H

REGULATIONS AND REQUIREMENTS

Dangerous waste TSD facility owners/operators must demonstrate that they have sufficient financial assets to ensure that the facility can be properly closed and, if necessary, and properly maintained during post closure. The documentation required can include certificates of insurance, proof of self insurance or sufficient liquid financial assets. In addition, owners/operators must have insurance for their facilities to cover accidents, releases, and other incidents.

The regulations specifically exclude federally owned facilities from the financial requirements. It has been assumed that governmental agencies have sufficient financial ability to properly close their TSD facilities, pay for post closure care where necessary, and cover costs arising from unexpected incidents. Since the Hanford Site is a federally owned facility, it is exempt from the TSD financial requirements.

APPLICABILITY

The PUREX facility is located on the Hanford Site which is owned by the U.S. Department of Energy. Since it is owned by the federal government, it is exempt from the financial requirements.

CONCLUSIONS AND RECOMMENDATIONS

- o Although not a requirement of the regulations, development of a closure cost estimate is recommended to facilitate federal budget acquisition prior to closure. In addition, current state regulations require operators at federal facilities to comply with the financial requirements under final status.

TANKS
40 CFR 265 SUBPART J

REGULATIONS AND REQUIREMENTS

State and Federal Regulations

Tanks which handle dangerous wastes are currently regulated under Washington State Regulations (WAC 173-303-200 and -400). Federal regulations (40 CFR Subpart J), promulgated since Washington incorporated state-specific tank standards, present much more stringent tank requirements. Since the State of Washington has been authorized to administer its own dangerous waste program, most of the more stringent federal tank regulations will not apply in Washington until the state incorporates the new standards into the state regulations.

To remain authorized, Washington must (within about two years) include in its regulations tank standards which are at least as stringent as the federal standards. If the state fails to adopt the federal tank standards, they would automatically go into effect in about two years, regardless. Thus, the more stringent federal tank regulations were considered in this assessment.

Specific standards are presented for the following aspects of dangerous waste tank systems:

- o Design and construction standards for new tank systems;
- o Assessment of existing tank systems;
- o Secondary containment;
- o Spill and overflow protection;

- o Inspections;
- o Responses to leaks or spills;
- o Closure and post-closure requirements; and
- o Particular requirements for ignitable, reactive, or incompatible wastes.

Design and Construction of Dangerous Waste Tank Systems

New tank systems which are constructed under interim status are required to adhere to specific design, construction, and installation standards. These requirements apply only to new tanks placed into service under interim status. The requirements are not applicable to existing dangerous waste tanks.

New tank systems which are constructed under interim status must adhere to specific design and construction standards. The primary design standard is that the tank system must be designed in accordance with one of the nationally recognized tank design standards. These standards have been developed by national professional groups such as the American Concrete Institute (ACI), the American Petroleum Institute (API), and the American Iron and Steel Institute (AISI). Other design requirements of new dangerous waste tank systems include:

- o Detailed corrosion potential analyses and design by a corrosion expert;
- o Consideration of external loads such as vehicular traffic;
- o Adequate foundation support for the system; and
- o Documentation of compatibility between the materials of construction and the waste in the tank system.

The regulations require that the owner/operator ensure that the tank system is properly installed without damage. The system must be inspected after placement, and before covering, for signs of potential distress. After inspection and prior to being placed in service, the tank system must be tested for tightness. Other installation requirements include:

- o Proper backfill materials and techniques;
- o Proper support of ancillary equipment; and
- o Documentation that the system was constructed and installed as designed and in accordance with the tank regulations.

Assessment of Existing Tank Systems

Existing tank systems without secondary containment must be assessed for structural integrity and satisfaction of the tank requirements within 1 year of the effective date of the regulations. For tanks handling non-radioactive dangerous waste at the Hanford Site, the assessment deadline has passed. If these tanks do not have secondary containment and have not been assessed, then they are out of compliance. Tanks that contain radioactive dangerous wastes only recently became regulated under the federal standards and must be assessed during the current calendar year.

The purpose of the assessment is to determine if an existing tank without secondary containment is suitable for continued use under the new tank regulations. At a minimum the assessment must address the following:

- o Design standards used in the original design of the tank system;
- o Compatibility between the materials of construction and the wastes handled in the tank;

- o Results of a leak test or an internal inspection of the tank. For underground, non-enterable tanks and for ancillary equipment, a leak test is required;
- o Corrosion protection system, if one exists;
- o Documented age of the tank system; and
- o Ancillary equipment.

The assessment must be reviewed and certified by an independent, registered professional engineer.

The assessment must include sufficient amount of detail so that an agency reviewing the assessment can determine if (1) the tank was sufficiently assessed and (2) if the tank is fit for continued service. For example, an inspection of a tank should include ultrasonic testing of the tank walls, checking for cracks in the roof, walls, floors, and around fittings, checking for loose fittings, testing the corrosion protection system, etc. Each component of the assessment must be documented in detail.

Secondary Containment

All tanks that handle dangerous wastes must have secondary containment, eventually. The specific date by which secondary containment must be provided depends on the age of the tank. Tanks constructed after the effective date of the regulations must have secondary containment. Existing tanks must have secondary containment within two years of the effective date or when the tank is 15 years old, whichever is later. Until secondary containment is provided, existing tanks must be leak tested or visually inspected each year in accordance with the assessment requirements noted above.

Typical secondary containment systems for tanks include the following:

- o Vaults in which the tank sits;
- o Double wall tanks with interstitial monitoring;
- o Impermeable liners; and
- o Concrete bases with berms.

Ancillary equipment must also be provided secondary containment. However, the following types of ancillary equipment are not required to have secondary containment if the equipment is inspected daily:

- o Non-pressurized above-ground piping;
- o Welded connections;
- o Sealless or magnetic-coupling pumps; and
- o Pressurized above-ground piping that has automatic shutoff devices.

Typical secondary containment systems for ancillary equipment includes:

- o Impermeable trenches;
- o Jacketed pipes; and
- o Double wall pipes.

The secondary containment system must be constructed with materials that are compatible with the wastes. The containment system must also be able to support the weight of any wastes which may be contained as well as external loads.

The secondary containment system must include a leak detection system which is capable of detecting the presence of a release within 24 hours. The

leak detection system can consist of automatic sensing devices or simply a program of daily visual inspection. Automatic leak detection systems include:

- o Thermal conductivity sensors;
- o Electrical resistivity sensors; and
- o Vapor detectors.

These sensors should be connected to an alarm system which, when initiated, alert the facility personnel that a release has occurred.

Spill and Overflow Prevention

Dangerous waste tanks must have spill and overflow prevention devices. Proper practices during transfer of wastes to and from the tank are also required. The regulations allow some flexibility in the specific types of spill and overflow prevention devices used on specific tanks. Spill and overflow prevention devices include:

- o Level sensors and gages;
- o High and low level alarms;
- o Automatic shutoff devices for feed lines;
- o Bypass systems;
- o Curbing, paving, and catchment facilities at loading and unloading areas; and
- o Use of dry disconnect and ball valve systems.

Level sensors can range from simply noting the liquid level on a marked ruler in the tank to automatic electronic devices which provide a continuous record of the liquid level. Any type of level sensing system is acceptable if it effectively prevents overflowing of the tank. For example, if manual visual methods are used for level monitoring, the facility operating procedures should include how often the tank level is to be checked, who is responsible for checking it, and what actions should be undertaken if excessive level are noted. The times when the level is checked should be directed toward those times when the tank is being filled or emptied.

High and Low Level Alarms High and low level alarms are considered part of the spill and overflow prevention system on dangerous waste tanks. The alarms are commonly integrated with the automatic level sensing devices and initiate when a predetermined high or low level is noted by the level sensor. Alternatively, the alarm systems can be separate from the level sensor and consist of a simple float switch.

Automatic Cutoffs An automatic cutoff system should stop all feeds to the tank when the tank is full. Generally this is accomplished by integrating the cutoff system with the high level alarm and level sensing systems. For example, an integrated system consists of one where upon noting a high level condition in the tank, the high level alarm is sounded and pumps feeding the tank are automatically shut off. Another type of automatic cutoff system is one where all pumps are shut down in the event that a release is detected. This type of cutoff system is typically integrated with the release detection system in the secondary containment system. Automatic shut down of pumps in the event of a sudden loss of pressure in the piping, as would be expected if a major piping failure has occurred, is another type of automatic cutoff system.

Bypass Systems A bypass system is necessary when a tank or ancillary equipment becomes inoperable and must be bypassed to complete or safely shut down the process. A sufficient number of redundant tanks and ancillary equipment should be provided so that wastes can be routed around

failed equipment safely. The bypass system can be integrated with the level sensing, high level alarm, and release detection systems so that the wastes are rerouted in the event of a high level condition or a release to the secondary containment system.

Delivery Areas where wastes are transferred to tanks using nonpermanent connections (i.e., hoses from a delivery truck) should be paved and bermed to prevent the release of any spills to the environment. The areas should have a sump where any spills or overflows are collected and returned to the tank. Such sumps should have a release detection system and be constructed of waste compatible materials. Connections in the delivery system should be designed to minimize the amount of wastes spilled when disconnecting from the tank.

Inspections

Inspection Program Dangerous waste tank systems must be inspected on a regular basis. Specifically, the following items must be inspected at least once during each operating day:

- o Overfill and spill control equipment;
- o Above-ground portions of the tank and ancillary equipment;
- o Leak detection and other monitoring data; and
- o Area around the tank and secondary containment system.

Corrosion protection systems must be checked within 6 months of their installation and annually thereafter. Sources of impressed current used in the corrosion protection system are required to be checked bimonthly.

Inspection of the spill and overflow prevention system should include:

- o Level sensing devices;
- o High and low level alarm systems;
- o Automatic cutoff systems; and
- o Bypass systems.

Each of these systems should be checked for proper operation daily. Although it is not required to actually test each system daily, some method of confirming daily that the systems are properly operating should be developed. Periodic (although not necessarily daily) testing of the alarm and cutoff systems should also be performed.

The above-ground portions of the tank system must be inspected daily for signs of corrosion or release (or potential release) of wastes. This inspection is directed toward checking the tank structure and ancillary equipment for distress such as leaks, cracks, buckles, bulges, discoloration, etc. Valves, pipes, fittings, hoses, pumps, and compressors should also be checked daily for:

- o Leaks;
- o Corrosion;
- o Excessive vibration or swaying;
- o Foundation cracks;
- o Leaky seals;
- o Safety equipment; and
- o Sufficient lubricating oil.

Data gathered from monitoring equipment should be reviewed at least daily. The data should be checked for evidence of a release (or potential release) of waste to the environment or to the secondary containment system. The data should also be checked to verify that the system is operating properly. Monitoring data that should be included in the daily inspection includes:

- o Leak detection sensor data;
- o Level indicator data;
- o Temperature and pressure data; and
- o Flow rate data.

The area around the tank system must be checked daily for evidence of releases of dangerous wastes or erosion. Such evidence includes wet spots or dead vegetation around the tank system. Other items to check for include erosion around the base of the tank and the secondary containment system or erosion in a dike surrounding the tank.

All of the inspections are required to be detailed and consider all portions of the tank system. It is not sufficient to simply state that "the tank system will be inspected". Rather, inspection of the above items should include checking specific features of the tank system for specific types of distress or evidence of distress.

Documenting The Inspection Program The inspection program that addresses the above requirements should be developed and documented as part of the facility operating procedures. Inspection checklists and logs should provide specific, detailed guidance to the inspector. For example, instead of simply stating "Check tank for distress", the daily inspection checklist for the inspection of the above-ground portions of the tank system should say;

"Check Tank B, the feed and outflow piping, pumps 101 and 102, and the secondary containment vault for:

- o Cracks;
- o Corrosion;
- o Discoloration; and
- o Excessive vibration or noise."

The detail and completeness of the inspection checklist should allow an inspector to immediately note that the inspection program satisfies the inspection requirements for dangerous waste tanks.

The inspection checklists and logs from past inspections should be maintained in the facility operating record. The logs should note the date of the inspection, the inspector's name, and the results of the inspection. If any items requiring attention were disclosed as a result of the inspection, the log should note what actions were taken.

Response to Leaks or Spills

The dangerous waste tank regulations require specific responses to leaks or spills. The responses in the tank regulations are unit-specific addenda to the response procedures in the Emergency requirements documented in the contingency plan. The required responses to a leak or spill from a tank system include:

- o Cessation of use, stopping flow into the tank;
- o Removal of wastes from the tank (if the tank is leaking) and/or removal of the wastes from the secondary containment system;
- o Containing visible releases to the environment;

- o Repair of the tank system; and

- o Reporting.

The failed portion of the tank system should be isolated from the other portions of the system by use of the bypass system. Thus, if a leak occurs in a tank, the level of wastes in the tank should be lowered to a level below the hole in the tank. The regulations note that such waste removal must be accomplished within 24 hours of detection of the release or at the earliest practicable time if it is not possible to do so within 24 hours. The removal of wastes also applies to waste released to, and contained in, the secondary containment system.

The response to a leak or spill must also include steps to immediately contain and cleanup any visible releases to the environment. Containing the release may include construction of temporary berms or closing channels to catch basins. Cleanup of visible releases could include excavation and disposal of contaminated soil or decontamination of the secondary containment system.

If the leak or spill was the result of the tank or ancillary equipment failing, the equipment must be repaired or replaced before returning to service. Major repairs and replacements must be certified as being accomplished in accordance with the dangerous waste tank design and construction requirements by an independent, registered professional engineer. If the release was from an underground, non-enterable tank, secondary containment must be provided to the tank prior to returning it to service.

If the quantity of wastes released is greater than 1 pound or if the release is not immediately cleaned up, the release must be reported to the regulatory agency within 24 hours. Within 30 days of a release to the environment, a report summarizing the following must be submitted to the regulatory agency:

- o Migration route of the released wastes;
- o Characteristics of the surrounding area including population, surface waters, drinking water supplies, soils, and hydrogeology;
- o Results of monitoring; and
- o Description of response actions.

Closure and Post-Closure

When a dangerous waste tank is permanently removed from service, it must be closed in accordance with specific tank closure requirements. The tank-specific closure requirements are addenda to the general dangerous waste closure requirements presented in 40 CFR Subpart G. Thus, a closure plan must be developed for the tank system.

Closure of a dangerous waste tank must include either complete removal of all contaminated equipment and materials or the tank must be closed as a landfill and be subject to post-closure care requirements. Post-closure requirements include financial assurance, groundwater monitoring, inspection, and maintenance. Closure plans for tanks must include closure as a landfill as a contingency closure procedure in the tank closure plan. As discussed in the guidance for the general closure requirements, the closure plan must describe, in detail, the specific steps that will be taken to properly close the tank system.

Ignitable, Reactive, or Incompatible Wastes

Dangerous waste tanks are not allowed to handle ignitable, reactive, or incompatible wastes unless the wastes are:

- (1) Made non-ignitable, nonreactive, and compatible prior to, or immediately after, entering the tank; or
- (2) Handled in a manner that prevents the wastes from igniting or reacting; or
- (3) The tank is used solely for emergencies.

The specific requirements under which (1) or (2) are required to be accomplished, as well as the general requirements for facilities handling ignitable, reactive, or incompatible wastes, are presented in WAC 173-303-395, Other General Requirements.

Tanks which handle ignitable or reactive wastes must be located a minimum distance from public ways, streets, and adjoining property lines. The specific distance requirements are presented in the National Fire Protection Code and depend on the type of tank, the size of the tank, and the nature of the material handled in the tank.

Labels

The state dangerous waste regulations provide addenda to the federal dangerous waste tank labeling requirements. The state regulations note that dangerous waste tanks must be marked with a label that notes the contents of the tank and the risks associated with the wastes. The label must be legible from at least 50 feet.

APPLICABILITY

Tanks E-5, F-15, F-16, F-18, G-7, U-3, and U-4 and condenser E-F11 are identified as dangerous waste treatment tanks on the Part A permit application submitted by PURIX. The tanks are used to treat fuel decladding waste, ammonia scrubber waste, laboratory waste, and waste from

cell sumps prior to shipment to the tank farms. The wastes are corrosive (pH less than 2) and/or toxic, thus, they are considered dangerous wastes. These tanks are required to satisfy the dangerous waste tank standards.

INFORMATION REVIEWED AND CURRENT STATUS

The current status and condition of the tanks was determined through interviews of the facility operators and review of the facility operating records.

It was not possible to directly observe the interior of the cells which contained the tanks at the time of the site visit. Photographs of the cell interiors were examined, however, for tank F17 and E-F11 concentrator.

All tanks are constructed of 304 stainless steel. Tank capacities are:

E-5	5,000 gallons
F-15	5,000 gallons
F-16	5,000 gallons
F-18	5,000 gallons
G-7	14,000 gallons
U-3	8,000 gallons
U-4	8,000 gallons
E-F11	2,600 gallons

Ancillary equipment to and from the tanks are also constructed of 304 stainless steel. Stainless steel is anticipated to be compatible with the wastes.

The tanks are located within cells beneath the PUREX canyon. The 5-1/2-foot-thick reinforced concrete cell floor provides secondary containment for the tanks and ancillary equipment (e.g., jumpers and piping). Additional secondary containment is provided for piping by the concrete hot pipe trench within the PUREX facility. After exiting the PUREX facility, secondary containment is provided for piping by a concrete

trench that extends to the 241-A-151 diversion box. Thus, secondary containment is provided for existing tanks and ancillary equipment and a tank integrity assessment is not required for treatment tanks at PUREX. The diversion box and piping extending from the box to underground storage are under the control of Tank Farms and are not included as part of this assessment.

Concrete is not compatible with low pH wastes. This was evidenced by photographs showing deterioration of the concrete floor in at least one of the cells. Low pH wastes are treated in tanks U3, U4, F15, F16, and F18. Expansion joints in the concrete may or may not have been damaged over the years. Cracks extending through the 5-1/2-foot-thick containment floor are not likely. However, due to the lack of inspection, the integrity of the of the containment floors is unknown.

Prior to transferring waste to Tank Farms, the wastes are booted up to a pH of at least 12.5. Thus, the concrete secondary containment structures for piping are thought to be compatible with the waste.

All cell floors are equipped with sumps. The cell floor sumps are equipped with automatic leak detection devices and liquid level detection. Leak detection devices are not provided in the hot pipe trench nor in the secondary containment structure provided for piping that extends to the diversion box. Leaks occurring in the hot pipe trench drain into the adjacent cell sump where leak detection is provided. Leaks occurring in the pipe trench extending to the diversion box drains toward the diversion box and catch tank TK-302-A. During waste transfer to Tank Farms, PUREX personnel monitor the level in the catch tank and Tank Farms monitor the volume of waste received. However, small leaks could go undetected. Visual inspection of the pipe trench is difficult due to radiological concerns.

Tank level (volume) is calculated from data provided by the tank contents weight factor and specific gravity. These parameters are measured and presented on recorders in the facility control room. High and low weight

factor alarms are also present. The alarm initiates both an audible and visual warning.

Spills and leaks that collect in the cell floor sumps are pumped to tank F-18 as soon as practicable, however, this is not always within a 24-hour period. Chemical sewer waste that collects continuously in F Cell sump are pumped to tank F18.

The tanks are not inspected on a regular basis. Inspection of the actual tanks, cells and ancillary equipment is difficult due to the radioactivity associated with the wastes. The tanks are not labeled per the tank labeling requirements.

Tanks that are permanently removed from service are transferred to the PUREX tunnels. This is not accomplished in accordance with a written closure plan.

Incompatible wastes and materials are present in the vicinity of dangerous waste treatment tanks at PUREX. Treatment includes the adjustment of low pH wastes to higher pH to meet Tank Farms acceptance criteria. This activity is conducted in a manner that prevents an uncontrolled reaction.

CONCLUSIONS AND RECOMMENDATIONS

- o (Secondary Containment) Provide compatible secondary containment around tanks U3, U4, F15, F16, and F18. Alternatively, document that the design of the secondary containment structures and the thickness of the concrete adequately mitigate the incompatibility of concrete and low pH wastes and receive concurrence from the regulatory agencies.
- o (Spill and Overflow Prevention) Provide leak detection for the pipe trench leading from the PUREX facility to the 241-A-151 diversion box.

- o (Inspection Requirements) Provide for daily inspection of the tanks or apply for a waiver to the RCRA daily inspection requirements for the tanks and ancillary equipment. Note in the waiver narrative the conflict between the RCRA inspection requirements and the ALARA requirements.

- o (Inspection Requirements) Include tank instrumentation data in the daily facility inspection program. Calculate and record the tank and sump levels, alarms initiated, and any other data available from the tank instrumentation. Such practices will aid in the acceptance of inspection waiver application discussed in the previous recommendation.

- o (Labeling Requirements) Place labels identifying the tanks, the contents of the tanks, and the major risks associated with the wastes on the exterior of the cover blocks.



HARTCROWSER

Hart Crowser, Inc.
1910 Fairview Avenue East
Seattle, Washington 98102-3699
206.324.9530
Seattle Tacoma Anchorage