

AUG 27 1997


ENGINEERING DATA TRANSMITTAL

0049245

Page 1 of 1

1. EDT 161475

2. To: (Receiving Organization) Distribution		3. From: (Originating Organization) M. J. Kupfer, LMHC, R2-12H5-49 376-6631		4. Related EDT No.: NA	
5. Proj./Prog./Dept./Div.: Tank 241-BX-111		6. Design Authority/ Design Agent/Cog. Engr.: M.J. KUPFER		7. Purchase Order No.: NA	
8. Originator Remarks: APPROVAL / RELEASE				9. Equip./Component No.: NA	
11. Receiver Remarks: 11A. Design Baseline Document? Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>				10. System/Bldg./Facility: NA	
				12. Major Assm. Dwg. No.: NA	
				13. Permit/Permit Application No.: NA	
				14. Required Response Date:	

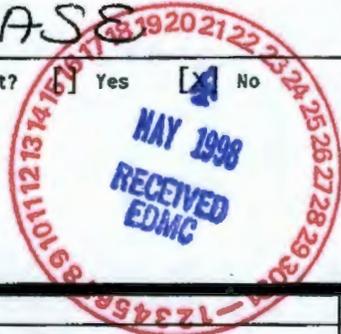

15. DATA TRANSMITTED					(F)	(G)	(H)	(I)
(A) Item No.	(B) Document/Drawing No.	(C) Sheet No.	(D) Rev. No.	(E) Title or Description of Data Transmitted	Approval Designator	Reason for Transmittal	Originator Disposition	Receiver Disposition
1	HNF-SD-WM-ER-653	-	0	Preliminary Tank Characterization Report for Single-Shell Tank 241-BX-111: Best-Basis Inventory	NA	1,2		

16. KEY					
Approval Designator (F)		Reason for Transmittal (G)		Disposition (H) & (I)	
E, S, Q, D or N/A (see WHC-CM-3-5, Sec.12.7)		1. Approval	4. Review	1. Approved	4. Reviewed no/comment
		2. Release	5. Post-Review	2. Approved w/comment	5. Reviewed w/comment
		3. Information	6. Dist. (Receipt Acknow. Required)	3. Disapproved w/comment	6. Receipt acknowledged

17. SIGNATURE/DISTRIBUTION (See Approval Designator for required signatures)											
(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN	(G) Reason	(H) Disp.	(J) Name	(K) Signature	(L) Date	(M) MSIN
		Design Authority				3		Central Files			A3-88
		Design Agent				3		DOE Reading Room			H2-53
1	1	Cog. Eng. M. J. Kupfer	<i>[Signature]</i>	8-25-97	H5-49	3		T. E. Jones			H5-49
1	1	Cog. Mgr. K. M. Hodgson	<i>[Signature]</i>	8-25-97	R2-11	3		TCSRC			R1-10
		QA				3		M. D. LeClair (4)			H0-50
		Safety				3		K. M. Hall			R2-12
		Env.				3					

18. M. J. Kupfer <i>[Signature]</i> 8-25-97 Signature of EDT Date Originator		19. _____ Authorized Representative Date for Receiving Organization		20. K. M. Hodgson <i>[Signature]</i> 8-25-97 Design Authority/ Date Cognizant Manager		21. DOE APPROVAL (if required) Ctrl. No. <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/comments <input type="checkbox"/> Disapproved w/comments	
---	--	---	--	--	--	---	--

Preliminary Tank Characterization Report for Single-Shell Tank 241-BX-111: Best-Basis Inventory

M. J. Kupfer (LMHC) and T. E. Jones (Meier Associates)
Lockheed Martin Hanford Corporation, Richland, WA 99352
U.S. Department of Energy Contract DE-AC06-96RL13200

EDT/ECN: 161475 UC: 712
Org Code: 74640 Charge Code: N4G3A
B&R Code: EW3120074 Total Pages: 33


Key Words: TCR, best-basis inventory

Abstract: An effort is underway to provide waste inventory estimates that will serve as standard characterization source terms for the various waste management activities. As part of this effort, an evaluation of available information for single-shell tank 241-BX-111 was performed, and a best-basis inventory was established. This work follows the methodology that was established by the standard inventory task.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: Document Control Services, P.O. Box 950, Mailstop H6-08, Richland WA 99352, Phone (509) 372-2420; Fax (509) 376-4989.

Bennett Wallace 8/27/97
Release Approval Date

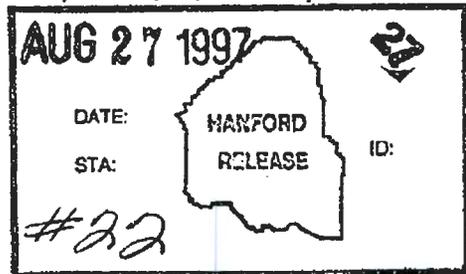

Release Stamp

Approved for Public Release

HNF-SD-WM-ER-653

Revision 0

**PRELIMINARY TANK
CHARACTERIZATION REPORT
FOR SINGLE-SHELL TANK
241-BX-111:
BEST-BASIS INVENTORY**

August 1997

M. J. Kupfer
Lockheed Martin Hanford Corporation
Richland, Washington

T. E. Jones
Meier Associates
Richland, Washington

Prepared for
U.S. Department of Energy
Richland, Washington

HNF-SD-WM-ER-653
Revision 0

This page intentionally left blank.

**PRELIMINARY TANK CHARACTERIZATION REPORT
FOR SINGLE-SHELL TANK 241-BX-111:
BEST-BASIS INVENTORY**

This document is a preliminary Tank Characterization Report (TCR). It only contains the current best-basis inventory (Appendix D) for single-shell tank 241-BX-111. No TCRs have been previously issued for this tank, and current core sample analyses are not available. The best-basis inventory, therefore, is based on an engineering assessment of waste type, process flowsheet data, early sample data, and/or other available information.

The *Standard Inventories of Chemicals and Radionuclides in Hanford Site Tank Wastes* (Kupfer et al. 1997) describes standard methodology used to derive the tank-by-tank best-basis inventories. This preliminary TCR will be updated using this methodology when additional data on tank contents become available.

REFERENCE

Kupfer, M. J., A. L. Boldt, B. A. Higley, K. M. Hodgson, L. W. Shelton, B. C. Simpson, and R. A. Watrous (LMHC), S. L. Lambert, and D. E. Place (SESC), R. M. Orme (NHC), G. L. Borsheim (Borsheim Associates), N. G. Colton (PNNL), M. D. LeClair (SAIC), R. T. Winward (Meier Associates), and W. W. Schulz (W²S Corporation), 1997, *Standard Inventories of Chemicals and Radionuclides in Hanford Site Tank Wastes*, HNF-SD-WM-TI-740, Rev. 0, Lockheed Martin Hanford Corporation, Richland, Washington.

HNF-SD-WM-ER-653
Revision 0

This page intentionally left blank.

HNF-SD-WM-ER-653
Revision 0

APPENDIX D

EVALUATION TO ESTABLISH BEST-BASIS INVENTORY FOR SINGLE-SHELL TANK 241-BX-111

This page intentionally left blank.

APPENDIX D**EVALUATION TO ESTABLISH BEST-BASIS INVENTORY
FOR SINGLE-SHELL TANK 241-BX-111**

An effort is underway to provide waste inventory estimates that will serve as standard characterization source terms for the various waste management activities (Hodgson and LeClair 1996). As part of this effort, an evaluation of available information for single-shell tank 241-BX-111 was performed, and a best-basis inventory was established. This work, detailed in the following sections, follows the methodology established by the standard inventory task.

D1.0 CHEMICAL INFORMATION SOURCES

There have been no significant sampling events for tank 241-BX-111 that could be used to estimate the chemical and radionuclide inventories.

Available information useful for assessment of tank 241-BX-111 inventories includes the following:

- Analytical data from tank 241-BX-112 (Kupfer and Winward 1997) which is the last tank in the three tank cascade (tanks 241-BX-110, 241-BX-111, and 241-BX-112).
- Analytical data for tank 241-T-104 (DiCenso et al. 1994) which contains one of the waste types from the BiPO_4 process assumed to be in tank 241-BX-111.
- Analytical data for tanks that contain the salt cake waste type assumed to be in tank 241-BX-111.
- The predicted tank content inventories from the Hanford Defined Waste (HDW) model (Agnew et al. 1996).

D2.0 COMPARISON OF COMPONENT INVENTORY VALUES

The HDW model-based inventory for tank 241-BX-111 is provided in Table D2-1 (Agnew et al. 1996). Sample-based data are not available for computing a valid inventory estimate for comparison with the HDW model estimate. The tank volume used to estimate the HDW model inventory is 799 kL (211 kgal). The waste volume listed in Hanlon (1996) differs significantly from that reported in Agnew et al. (1996). Hanlon (1996) reports a total waste volume of 613 kL (162 kgal) which includes 4 kL (1 kgal) supernatant with the remaining volume consisting of sludge and salt cake. The HDW model assumes that the waste consists entirely of solids (no supernatant). The waste density used for the HDW model inventory estimate is 1.56 g/mL. The chemical species in this Appendix are reported without charge designation per the best-basis inventory convention.

Table D2-1. Hanford Defined Waste Model-Based Inventory Estimates for Components in Tank 241-BX-111 (Agnew et al. 1996).

Analyte	HDW model inventory estimate (kg)	Analyte	HDW model inventory estimate (kg)
Al	42,000	Pb	800
Bi	1,300	P as PO ₄	15,000
Ca	2,200	Si	1,700
Cl	3,100	S as SO ₄	13,000
Cr	1,800	Sr	0.21
F	1,200	TIC as CO ₃	21,000
Fe	1,800	TOC	4,940
Hg	6.3	U _{TOTAL}	4,200
K	1,000	Zr	96
La	0.30	H ₂ O (wt%)	42
Mn	120	Density (kg/L)	1.56
Na	200,000	Radiological components* (Ci)	
Ni	550	Pu	120
NO ₂	56,000	¹³⁷ Cs	150,000
NO ₃	270,000	⁹⁰ Sr	88,000
OH	110,000		

HDW = Hanford Defined Waste, data rounded to two significant figures

*Radionuclides decayed to January 1, 1994.

D3.0 COMPONENT INVENTORY EVALUATION

The following evaluation of tank contents is performed to identify potential errors and/or missing information that would have an affect on HDW model component inventories.

D3.1 CONTRIBUTING WASTE TYPES

The following abbreviations are used to designate waste types:

- BYSlCk = Salt cake resulting from in-tank solidification of supernatants (evaporation using in-tank heaters).
 CW = BiPO₄ process aluminum cladding waste.
 1C = first decontamination cycle BiPO₄ waste (also contains some CW which was used to neutralize the 1C waste).
 2C = Second decontamination cycle of the bismuth phosphate process
 EB-ITS = Hill et al. (1995) designation for evaporator bottoms. Comparable to BYSlCk.

Reported Waste Types in Tank 241-BX-111

Anderson (1990), SORWT (Hill et al. 1995): 1C, EB-ITS, CW
 Agnew et al. (1996): BYSlCk, 1C

SORWT = Sort on radioactive waste type

Model-Based Prediction of Current Waste Types and Volumes (Agnew et al. 1996)

Waste type	Waste Volume: kL (kgal)
BYSlCk	678 (179)
1C2	121 (32)

Tank 241-BX-111 is the middle tank in a cascade that includes tanks 241-BX-110 and 241-BX-112. Based on the process history from Anderson (1990) and Agnew et al. (1995) it is expected that 1C/CW waste solids fill the bottom of tank 241-BX-111. These solids resulted from the cascade from tank 241-BX-110 from 1950 to 1954. No other solids contributions are apparent from the transfer records until evaporator bottoms were received from operations of the in-tank solidification (ITS) evaporator unit beginning in 1972. This waste was all received from tank 241-BY-112, and the solids resulting from these operations are designated as BYSlCk by Agnew et al. (1996). Anderson (1990) and Hill et al. (1995) state the presence of CW in the tank from 1965 to 1971 (before receipt of evaporator bottoms from ITS). However, there are no firm records that CW was transferred to the tank nor that solids from this waste (other than those from the 1C/CW inventory) exist in the tank.

Based on close examination of the waste transaction records (Agnew et al. 1995) and waste level measurements reported in Brevick et al. (1996), it is concluded that the Agnew et al. (1996) basis provides a reasonable approximation of the waste volumes and relative proportions of waste types (i.e., 678 kL [179 kgal] BYSlCk and 121 kL [32 kgal] 1C waste) in tank 241-BX-111. Full core sampling of this tank would likely be required to verify/dispute the model predictions.

D3.2 EVALUATION OF TECHNICAL FLOWSHEET INFORMATION

The neutralized waste composition for 1C waste based on the flowsheet defined in Schneider (1951) is provided in Table D3-1. The Los Alamos National Laboratory (LANL) defined 1C waste stream from Agnew et al. (1996) is also provided for comparison. As shown in Table D3-1 the aluminum concentration in the 1C defined waste stream from Agnew et al. is approximately a factor of three higher than for the flowsheet composition. The presence of Al in the 1C waste streams is attributed to the addition of aluminum-cladding waste in the BiPO₄ process facilities to neutralize the 1C waste stream. Based on information in Schneider (1951) it is thought that the 1C waste stream contained approximately 7 vol% cladding waste, which is about a third of that estimated in Agnew et al. Other component concentrations in the Schneider 1C flowsheet and the LANL defined 1C waste stream are comparable.

There is no flowsheet basis for salt cake resulting from the ITS units used in the BY Tank Farm that can be compared to the LANL compositions for BYSlCk. Tank waste analyses are available, however, for BY Tank Farm tanks known to contain BYSlCk. These salt cake compositions are compared to the LANL BYSlCk defined waste in Section D3.4.2.

Table D3-1. Technical Flowsheet and Hanford Defined Waste Streams. (2 Sheets)

Analyte	Flowsheet 1C ^a (M)	HDW model 1C2 ^b (M)
NO ₃	1.44	0.588
NO ₂	0.0577	0.174
Cl	NR	0.0154
SO ₄	0.0631	0.0616
PO ₄	0.258	0.334
CO ₃	NR	0.0181
F	0.170	0.228
Bi	0.0115	0.014
Fe	0.0315	0.046
Mn	NR	0
Si	0.0312	0.038

Table D3-1. Technical Flowsheet and Hanford Defined Waste Streams. (2 Sheets)

Analyte	Flowsheet 1C ^a (M)	HDW model 1C2 ^b (M)
U	9.63 E-04	7.00 E-04
Cr ^{+3/+6}	0.00306	0.0052
Ce	1.93 E-04	NR
Na	2.17	2.17
K	NR	0.0034
Hg	NR	2 E-05
Zr	2.96 E-04	0.004
Al	0.0826	0.233

HDW = Hanford Defined Waste

NR = Not reported

^a Appendix C of Kupfer et al. (1997) and Schneider (1951). Assumes 1C waste contains approximately 7 percent CW

^b Appendix B of Agnew et al. (1996). Assumes 1C waste contains approximately 24 percent CW.

D3.3 ASSUMPTIONS FOR RECONCILING WASTE INVENTORIES

Reference inventories of components in tank 241-BX-111 were estimated using an engineering assessment that is based on a set of simplified assumptions. The predicted inventories were then compared with the HDW model inventories. The assumptions and observations for the engineering assessment were based on best technical judgement pertaining to input information that can significantly influence tank inventories. This includes: (1) prediction of contributing waste types, and relative proportions of the waste types, (2) predictions of flowsheet conditions, fuel processed, and waste volumes, (3) prediction of partitioning of components, and (4) predictions of physical parameters such as density, percent solids, etc. By using this evaluation the assumptions can be modified as necessary to provide a basis for identifying potential errors and/or missing information that could influence the sample- and model-based inventories. The following are simplified assumptions and observations used for the evaluation.

- The 1C and BYSlCk waste streams contributed to solids formation (Agnew et al. 1996). The 1C waste stream contained 7 vol% of CW from the BiPO₄ process (Schneider 1951).
- The analytical data for tanks 241-BX-112 (Kupfer and Winward 1997) and 241-T-104 (DiCenso et al. 1994), which contain only the 1C waste type, helped provide the analytical basis for estimating the inventory in tank 241-BX-111. The

analytical data for BY Tank Farm salt cake in tanks 241-BY-105, 241-BY-106, and 241-BY-110 helped provide the basis for estimating the inventory for salt cake components in tank 241-BX-111.

The volumes of the assumed waste types are 121 kL (32 kgal) 1C waste and 678 kL (179 kgal) BYSlcCk (Agnew et al. 1996).

D3.4 METHODOLOGY FOR ESTIMATING TANK 241-BX-111 WASTE INVENTORY

There are no appropriate samples for tank 241-BX-111 that could be used to estimate tank waste component inventories. In addition the process history for this tank is not adequately defined to enable an estimate of waste component inventories. However, the assumed waste types in tank 241-BX-111 (1C and BYSlcCk) have been sufficiently characterized in other tanks to allow use of this information as a basis for estimating the inventory in tank 241-BX-111. Thus, inventories calculated for tanks 241-T-104 and 241-BX-112 (1C waste), and three tanks containing (241-BY-105, 241-BY-106, and 241-BY-110) BYSlcCk provided the basis for the independent assessment of the tank 241-BX-111 inventory.

Some caution should be used in assuming that the chemical composition for a particular waste type in one tank can be used for that waste type in other tanks. Although this assumption has been shown to be valid for some tanks, particularly for those in a cascade arrangement, component concentrations in a particular waste type may not always be comparable to other waste tanks due to the large variation in the waste volumes flowing through the tanks, variations in solids and liquid ratios resulting from cascade and cribbing procedures, and also because of potential for chemical reactions (e.g., metathesis) of components when mixed/diluted with other waste types. However, without suitable analytical data and/or process history records for tank 241-BX-111, this method was used as the basis for predicting the tank inventory.

D3.4.1 Methodology for 1C Waste

One method for estimating a component inventory for a particular waste type in a tank (i.e., 1C waste) is to derive a concentration factor (CF) for that component. This approach was used to estimate inventories in tank 241-T-104 as well as tank 241-BX-112 that is in the same cascade as tanks 241-BX-110 and 241-BX-111. Concentration factors are a means of reconciling process-based information and sample-based information for particular waste types. The CF is derived by dividing the concentration of a component found in the tank samples by the concentration of that component in the neutralized process waste stream (i.e., flowsheet concentrations in Table D3-1). The relative concentrations of components expected to precipitate essentially 100 percent to the waste solids (e.g., Bi, Fe, and Zr) should be approximately proportional to the respective flowsheet concentrations for those

components; i.e., these components should exhibit nearly the same CFs. If this is the case, it can generally be concluded that the sample data are consistent with the flowsheet basis and thus, represent the tank contents. Since the CFs are often consistent for the same waste type in different tanks, inventories for components in tanks that do not have samples (e.g., tank 241-BX-111) can be estimated if it is known that the defined waste is indeed present in the tank, and the volume of the defined waste is known or can be predicted.

The CFs are quite different for different waste types. For example the CF based on Bi for the BiPO_4 process 224 waste is 95 and for 2C waste the CF is approximately 20.

The following procedure is used to calculate the CF for Bi for 1C waste in tank 241-BX-112. The analytical-based inventory for Bi is 14,200 kg (Kupfer and Winward 1997) which corresponds to a Bi concentration in the solids of 0.110M. The flowsheet concentration for Bi is 0.0115M (Table D3-1). The CF_{Bi} is:

$$\frac{0.110 \text{ moles Bi/L}}{0.0115 \text{ moles Bi/L}} = 9.5$$

Calculated CFs for components in 1C waste for tanks 241-BX-112 and 241-T-104 that are expected to fully precipitate, range from 9 to 12 (Bi, Si, Zr, Ce, and Cr). Based on known chemistry of these components in alkaline solutions it is expected that the components do indeed precipitate approximately 100 percent and the variation in CFs is due to some sample heterogeneity and/or laboratory analytical error. For the most part these CFs are considered consistent which indicates that the samples likely represent the 1C flowsheet (Table D3-1) basis for the wastes.

Once the CFs for fully precipitated components for a waste type are determined, the sample analysis can be used to establish how other components such as SO_4 or PO_4 partition between solids and supernatants. Concentration factors for components not expected to precipitate 100 percent can be ratioed to CF_{Bi} to obtain the partitioning factors (PFs) for those components. The PF for any component N, defined as $\text{CF}_N/\text{CF}_{\text{Bi}}$, is the fraction of N partitioned to the sludge.

$$\text{Thus the PF for } \text{PO}_4(241\text{-BX-112}) = \frac{\text{CF}_{\text{PO}_4}}{\text{CF}_{\text{Bi}}} = \frac{3.2}{9.5} = 0.34$$

i.e., 0.34 (100) = 34 percent of the PO_4 partitions to the solids.

Using this method, the estimated PFs for other components for 1C waste based on tank 241-BX-112 are shown in Table D3-2.

Table D3-2. Partition Factors for 1C Waste Components in Tank 241-BX-112.

Al	0.84
F	0.45
Fe	0.74
Na	0.23
NO ₂	0.2
NO ₃	1.34
PO ₄	0.34
SO ₄	0.15
U	0.62

In general, these PFs also are quite comparable to those found in tank 241-T-104. Several anomalies are apparent for tank 241-BX-112; e.g., the PFs for Al and NO₂ are surprisingly high. Based on the analytical data, it could be concluded that these components are essentially fully precipitated. It was also unexpected that both Fe and U apparently partition between the solids and supernatant. Possible explanations for these unexpected conclusions are summarized in Section D3.6.

The calculated CFs and PFs for tanks 241-BX-112 and 241-T-104 provide significant confidence that the analytical data for the tanks are representative of the tank contents and could be used as a basis for component inventories in tank 241-BX-111. This is substantiated by the following:

- CFs for components that are expected to fully precipitate are quite consistent which indicates that the samples likely represent the 1C flowsheet basis for the waste.
- The PFs indicate reasonable partitioning of components based on experience and knowledge of the typical chemical behavior of the components in alkaline media (except for nitrite).

D3.4.2 Methodology for Salt Cake Waste

BY Tank Farm salt cake (BYSltCk), the abbreviation used by Agnew et al. (1996), is representative of salt waste supernatants that are evaporated and concentrated using in-tank heaters. In-tank solidification campaigns were performed in the BY Tank Farm from 1964

through 1976: waste supernatants that were evaporated originated primarily from the BiPO_4 process operations in B Plant. Heaters were placed in tanks 241-BY-101, 241-BY-102 and 241-BY-112. Certain BY Tank Farm tanks were designated as feed tanks. Concentrates from the heated tanks were transferred to other tanks in the BY Tank Farm and some BX Tank Farm tanks where they cooled and crystallized (Agnew et al. 1995)

A defined waste composition for BYSlCk is provided in Agnew et al. (1996). Because of the complicated waste supernatant transfer history of feed to the ITS campaign and, the lack of a flowsheet basis for the waste, it is difficult to perform an independent assessment to estimate a salt cake composition that can be compared to the model-based BYSlCk composition. However, some samples from several BY Tank Farm tanks containing BYSlCk have been analyzed and reported. Table D3-3 summarizes the compositions of salt cake from tanks 241-BY-105, 241-BY-110 and 241-BY-106 based on segment-level analysis reported, respectively, in Simpson et al. (1996a and b) and Bell et al. (1996). Also shown are the average concentrations of waste components for the BY Tank Farm salt cake in those tanks. For comparison, the BYSlCk defined waste composition from Agnew et al. (1996) is also shown.

Table D3-3. Concentrations of Components in BY Tank Farm Salt Cake
Samples^a ($\mu\text{g/g}$). (2 Sheets)

Analyte	241-BY-105 ^a	241-BY-106 ^b	241-BY-110 ^c	Average concentration	BYSlCk ^d
Ag	17.4	14.5	17.5	16.5	NR
Al	18,400	20,400	14,100	17,633	35,800
Bi	55.6	NR	NR	55.6	116
B	NR	113	92.3	103	NR
Cd	6.54	8.25	21.1	12.0	NR
Ca	216	308	400	308	1,820
Cl	897	2,060	2,250	1,736	2,780
Cr	321	855	2,900	1,359	1,630
Co	8.75	NR	NR	8.75	NR
Cu	7.57	NR	NR	7.57	NR
F	4,100	5,130	5,420	4,883	700
Fe	476	215	924	538	554
Pb	50.3	64.5	130	82	726
Mn	54.8	9.57	52.8	39.1	110
Na	198,000	203,000	237,000	212,667	176,000
Ni	75.9	47.9	193	106	490

Table D3-3. Concentrations of Components in BY Tank Farm Salt Cake Samples^e ($\mu\text{g/g}$). (2 Sheets)

Analyte	241-BY-105 ^a	241-BY-106 ^b	241-BY-110 ^c	Average concentration	BYSltCk ^d
NO ₃	491,000	329,000	184,000	335,000	246,000
NO ₂	9,410	32,100	30,600	24,037	49,500
Oxalate	11,300	8,990	13,600	11,297	0.15
PO ₄	4,890	5,270	14,200	8,120	4,020
OH	NR	NR	NR	NR	96,700
K	712	2,470	1,930	1,704	910
Si	180	184	451	272	1,360
SO ₄	10,600	11,300	18,400	13,433	11,400
Sr	88.3	44.4	58.1	64	0.20
CO ₃	NR	36,800	159,000	97,900	18,600
TOC	3,250	2,500	5,920	3,890	4,515
U	261	164.2	697	374	3,790
Zr	5.23	6.28	14.4	8.64	16.7
Density (g/mL)	NR	1.71	NR	1.71	1.62
H ₂ O wt%	16.1	25.5	23.2	21.6	37.4
Radionuclides ^f ($\mu\text{Ci/g}$)					
¹³⁷ Cs	NR	106	60	83	133
⁹⁰ Sr	NR	NR	22	22	80
^{239/240} Pu	NR	NR	0.019	0.019	0.11

NR = Not reported

^a Simpson et al. (1996a)^b Bell et al. (1996)^c Simpson et al. (1996b)^d Agnew et al. (1996).^e Less than values were not included in this analysis^f Radionuclides are reported as of the sample analysis date.

As indicated in Table D3-3, the concentrations of major waste components such as Na, Al, NO₃, PO₄, and SO₄ vary between tanks by no more than an approximate factor of three. However, the variation between tanks for minor components is much higher.

The average composition based on sample analyses compares within approximately a factor of two with the predicted BYSlCk composition major components from the HDW model. For this engineering assessment the average analytical-based composition from tanks 241-BY-105, 241-BY-106, and 241-BY-110 will be used for estimating the composition of the salt cake in tank 241-BX-111.

D3.5 ESTIMATED COMPONENT INVENTORIES

Following are the calculational bases and example calculations for estimating component inventories in tank 241-BX-111.

D3.5.1 Inventory Estimates for 1C Waste

Inventories for components in the 1C waste type in tank 241-BX-111 were based on the CFs and PFs derived from tanks 241-T-104 and 241-BX-112. Since tank 241-BX-111 is in the cascade series with tank 241-BX-112 and since both tanks received 1C waste directly from B Plant BiPO₄ process, the CFs and PFs derived from the analytical data for tank 241-BX-112 (Kupfer and Winward 1997) were used to calculate the inventories of tank 241-BX-111. These sludge inventories are shown in D3-4.

Inventory of Components That Precipitate Approximately 100 Percent (Bi, Si, Zr, Ce, and Cr)

Inventories of components that precipitate 100 percent were calculated using a CF of 9.5 based on Bi. For components that partition, the PFs listed in Table D3-2 for tank 241-BX-112 were used.

$$\text{Bi: } 0.0115 \text{ moles Bi/L}_{1\text{C}} \times 9.5_{\text{CF}} \times 121 \text{ kL}_{1\text{C}} \times 1,000 \text{ L/kL} \times 209 \text{ g/mole Bi} \\ \times \text{kg}/1.0 \text{ E}+03 \text{ g} = 2,760 \text{ kg}$$

$$\text{Si: } 0.0312 \text{ moles Si/L}_{1\text{C}} \times 9.5_{\text{CF}} \times 121 \text{ kL}_{1\text{C}} \times 1,000 \text{ L/kL} \times 28.1 \text{ g/mole Si} \\ \times \text{kg}/1.0\text{E}+03 \text{ g} = 1,010 \text{ kg}$$

Similarly

$$\text{Zr: } 31.0 \text{ kg}$$

$$\text{Ce: } 31.1 \text{ kg}$$

$$\text{Cr: } 183 \text{ kg}$$

Inventory of Components that Partition Between Liquid and Solid Phases (Na, Al, Fe, U, NO₃, NO₂, SO₄, PO₄, and F)

Na: $2.17 \text{ moles Na/L}_{1C} \times 9.5_{CF} \times 0.23 \text{ PF} \times 121 \text{ kL} \times 1,000 \text{ L/kL} \times 23 \text{ g/mole Na} \times \text{kg}/1.0\text{E}+03 \text{ g} = 13,000 \text{ kg}$

Al: $0.0826 \text{ moles Al/L}_{1C} \times 9.5_{CF} \times 0.84 \text{ PF} \times 121 \text{ kL} \times 1,000 \text{ L/kL} \times 27 \text{ g/mole Al} \times \text{kg}/1.0\text{E}+03 \text{ g} = 2,200 \text{ kg}$

Similarly

Fe: 1,500 kg

U: 166 kg

NO₃: 12,300 kg

NO₂: 4,030 kg

SO₄: 1,040 kg

PO₄: 9,580 kg

F: 1,670 kg

Table D3-4. Estimated Concentrations of Tank 241-BX-111 Sludge. (2 Sheets)

Analyte	241-BX-112 inventory ^a (kg)	Analytical-based sludge inventory estimate ^b (kg)	Concentration factor-based sludge inventory estimate ^c (kg)	Engineering-based sludge inventory estimate ^d (kg)
Al	11,100	2,150	2,200	2,150
Bi	14,200	2,760	2,760	2,760
Ca	2,040	396	NR	396
Cl	860	167	NR	167
Cr	1,050	204	183	204
F	8,700	1,690	1,670	1,690
Fe	7,700	1,490	1,500	1,490
Pb	<269	<52.2	NR	<52
Mn	263	51.0	NR	51
Na	66,800	13,000	13,000	13,000
Ni	<2.26	<0.44	NR	<0.44
NO ₃	61,500	11,900	12,300	11,900
NO ₂	20,900	4,050	4,030	4,050

Table D3-4. Estimated Concentrations of Tank 241-BX-111 Sludge. (2 Sheets)

Analyte	241-BX-112 inventory ^a (kg)	Analytical-based sludge inventory estimate ^b (kg)	Concentration factor-based sludge inventory estimate ^c (kg)	Engineering-based sludge inventory estimate ^d (kg)
PO ₄	48,100	9,330	9,580	9,330
OH	NR	NA	NR	NR
K	382	74.1	NR	74.1
Si	6,830	1,320	1,010	1,320
SO ₄	5,300	1,030	1,040	1,030
Sr	107	20.8	NR	20.8
CO ₃	8,800	1,710	NR	1,710
TOC	780	151	NR	151
U	848	164	NR	160
Zr	<63.5	<12.3	31.0	31.0
Radionuclides ^e (Ci)				
¹³⁷ Cs	42,200	8,180	NR	8,180
⁹⁰ Sr	4,920	954	NR	954

NA = Not applicable

NR = Not reported

^a Kupfer and Winward (1997)

^b Calculated by multiplying data in column 2 by the ratio of volumes of waste in tanks 242-BX-111 and BX-112 (32 kgal/165 kgal)

^c Data generated in Section D3.5.1

^d Data selected from columns 3 or 4

^e Radionuclides decayed to January 1, 1994.

D3.5.2 Inventory Estimates for BY Tank Farm Salt Cake

The inventory of components from BY Tank Farm salt cake were calculated from the average component concentrations from tanks 241-BY-105, 241-BY-106, and 241-BY-110 (Table D3-3). The waste volume assumed for this waste type (678 kL [179 kgal]) and the average waste density of 1.71 g/mL were used for these calculations. The following is an example calculation for the Na content in the BY Tank Farm salt cake in tank 241-BX-111.

$$\begin{aligned} \text{Na: } & 2.13 \text{ E}+05 \text{ } \mu\text{g/g} \times 1.0 \text{ E}-06 \text{ g/}\mu\text{g} \times 1.71 \text{ kg/L} \times 678 \text{ kL} \times 1,000 \text{ L/kL} \\ & = 2.47 \text{ E}+05 \text{ kg Na} \end{aligned}$$

Table D3-5. Estimated Salt Cake Inventory in Tank 241-BX-111.

Analyte	Average concentration ^a ($\mu\text{g/g}$)	Salt cake inventory estimate ^b (kg)	Analyte	Average concentration ^a ($\mu\text{g/g}$)	Salt cake inventory estimate ^b (kg)
Al	17,633	20,400	NO ₂	24,037	27,900
Bi	55.6	64.5	PO ₄	8,120	9,410
Ca	308	357	OH	NR	NR
Cl	1,736	2,010	K	1,704	1,980
Cr	1,359	1,580	Si	272	315
F	4,883	5,660	SO ₄	13,433	15,600
Fe	538	624	Sr	64	74
Pb	82	95.1	CO ₃	97,900	114,000
Mn	39.1	45.3	TOC	3,890	4,510
Na	212,667	247,000	U	374	434
Ni	106	123	Zr	8.64	10.0
NO ₃	335,000	388,000			
Radio-nuclides ^c	$\mu\text{Ci/g}$	Ci	Radio-nuclides	$\mu\text{Ci/g}$	Ci
¹³⁷ Cs	86.2	99,900	^{239/240} Pu	0.019	22
⁹⁰ Sr	22.9	26,500			

NR = Not reported

^a Data from Table D3-3, column 5

^b Calculated assuming density = 1.71 g/mL and volume = 678 kL (179 kgal)

^c Radionuclides decayed to January 1, 1994.

D3.5.2 Tank Inventory Estimate

The tank inventory estimates were calculated by adding the salt cake component estimate (column 2) with the sludge inventory estimate (column 3) and are reported in column 4. The HDW model inventory estimates are included in column 5 for comparison.

Table D3-6. Inventory Estimate for Tank 241-BX-111 (2 Sheets)

Analyte	Salt cake inventory estimate ^a (kg)	Engineering-based sludge inventory estimate ^b (kg)	Engineering-based tank inventory estimate ^c (kg)	HDW tank inventory estimate ^d (kg)
Al	20,400	2,150	22,600	42,000
Bi	64.5	2,760	2,820	1,250
Ca	357	396	753	2,210
Cl	2,010	167	2,180	3,110
Cr	1,580	204	1,780	1,810
F	5,660	1,690	7,330	1,210
Fe	624	1,490	2,110	1,820
Pb	95.1	<52	<147	796
Mn	45.3	51	96.3	121
Na	247,000	13,000	260,000	203,000
Ni	123	<0.44	123	546
NO ₃	388,000	11,900	400,000	272,000
NO ₂	27,900	4,050	32,000	55,700
PO ₄	9,410	9,330	18,740	14,500
OH	NR	NR	NA	113,000
K	1,980	74.1	2,050	1,010
Si	315	1,320	1,640	1,660
SO ₄	15,600	1,330	16,900	13,000
Sr	74	20.8	94.8	0.213
CO ₃	114,000	1,710	116,000	20,700
TOC	4,510	151	4,660	4,940
U	434	164	598	4,180
Zr	10.0	31.0	41.0	95.8

Table D3-6. Inventory Estimate for Tank 241-BX-111 (2 Sheets)

Analyte	Salt cake inventory estimate ^a (kg)	Engineering-based sludge inventory estimate ^b (kg)	Engineering-based tank inventory estimate ^c (kg)	HDW tank inventory estimate ^d (kg)
Radionuclides ^e (Ci)				
¹³⁷ Cs	99,900	8,180	108,000	150,000
⁹⁰ Sr	26,500	954	27,400	88,000

HDW = Hanford Defined Waste

NA = Not applicable

NR = Not reported

^a Data from Table D3-5, columns 3 and 6

^b Data from Table D3-4, column 5

^c Data is the sum of columns 2 and 3 in this table

^d Agnew et al. (1996)

^e Radionuclides decayed to January 1, 1994.

D3.6 EVALUATION SUMMARY

The lack of sample-based inventory data adds considerable uncertainty to estimation of chemical and radionuclide inventories for tank 241-BX-111. The use of analytical-based composition data from other tanks seems the most viable approach for tank 241-BX-111. However, the largest uncertainty pertains to correctly predicting the relative proportions of the waste types in the tank and assuming that the analytical basis for the inventories in one tank can be extrapolated correctly to another tank. For the 1C waste type, the latter concern is reduced somewhat since there is evidence based on at least two other tanks that the tank waste analyses are representative of the BiPO₄ 1C flowsheet. However, there is considerable variation in component concentrations (particularly for minor components) for the three tanks that represent (241-BY-105, 241-BY-106, and 241-BY-110) the BY Tank Farm salt cake.

Estimated inventories from this evaluation for selected components are compared with the HDW model-based inventories in Table D3-6. Estimated inventories for the 1C waste component (based on tank 241-BX-112 sample analyses) and the average BY Tank Farm salt cake were added together to provide the total tank inventory estimate. Comments and observations regarding these inventories are provided by component in the following text.

Aluminum. The aluminum inventory estimated by this assessment is about 50 percent of that predicted by the HDW model. The largest contribution of aluminum is from the BY Tank Farm salt cake rather than 1C waste. The aluminum concentrations in all three comparison samples were less than that for the HDW model BYSlCk. Additionally, the variation in aluminum concentration among the three samples was quite small.

Bismuth. The bismuth inventory estimated by this evaluation is approximately twice that provided by the HDW model. The HDW model assumes that a significant portion of the bismuth does not precipitate with the solids, with the soluble fraction being sent to cribs.

Chromium. The chromium inventory estimated from this assessment is about the same as that predicted by the HDW model. However, this is coincidental since the HDW model assumes that none of the chromium in the 1C waste precipitates with the solids, whereas this assessment reflects sample analyses that indicate essentially all of the chromium reports to the solids. The total chromium content for the two estimates is comparable, however, since the chromium concentration in the BYSlCk defined waste is higher than that for the BY Tank Farm salt cake samples.

Fluoride. The fluoride inventory predicted by this assessment is approximately six times higher than the HDW inventory. Analytical data for tanks 241-BX-112 and 241-T-104 show that a major portion of the fluoride in 1C waste is partitioned to the solids, whereas, the HDW model assumes that no fluoride partitions to the solids. In addition, the sample analyses for the three BY Tank Farm (241-BY-105, 241-BY-106, and 241-BY-110) salt cake tanks consistently show six to seven times higher fluoride concentrations that predicted for the HDW model BYSlCk.

Total Hydroxide. Once the best-basis inventories were determined, the hydroxide inventory was calculated by performing a charge balance with valences of other analytes. In some cases, this approach required that other analyses (e.g., sodium or nitrate) inventories be adjusted to achieve the charge balance. No adjustments were required in this best-basis estimate. This charge balance approach is consistent with that used by Agnew et al. (1997).

Iron. The iron inventory estimated by this assessment is approximately the same as the HDW model prediction. The HDW model assumes essentially all iron precipitates with the 1C waste but analytical evidence for tanks 241-BX-112 and 241-T-104 indicates that approximately 75 percent precipitates. However, the iron concentrations for the HDW model defined waste BYSlCk is slightly higher than for the average for the three BY Tank Farm (241-BY-105, 241-BY-106, and 241-BY-110) salt cake samples.

Sodium. This assessment predicts a 30 percent higher sodium inventory than predicted by the HDW model. This is due entirely to the consistently higher sodium concentrations found for the BY Tank Farm salt cake tank samples than for the HDW model BYSlCk.

Nitrate. Consistently higher concentrations of nitrate were found for the three BY Tank Farm (241-BY-105, 241-BY-106, and 241-BY-110) salt cake samples than predicted for the HDW model BYSlCk defined waste.

Nitrite. This assessment predicts only half of the inventory for nitrite than predicted by the HDW model. This is due to the consistently lower nitrite concentrations found for the three BY Tank Farm (241-BY-105, 241-BY-106, and 241-BY-110) salt cake tank samples than for the HDW model BYSlCk defined waste.

Phosphate. The phosphate inventory estimated by this assessment is about 25 percent higher than the HDW model prediction. The phosphate concentrations for the three BY Tank Farm (241-BY-105, 241-BY-106, and 241-BY-110) salt cake samples were twice that for the HDW model BYSlCk. However, the HDW model predicts a higher phosphate inventory contribution from the 1C wastes primarily due to the higher phosphate concentration for the HDW model 1C defined waste than assumed for the Schneider (1951) process flowsheet (see Table D3-1).

Uranium. The HDW model predicts the tank waste uranium inventory to be seven fold higher than estimated by this assessment. Essentially the entire uranium contribution is from the BYSlCk. However, the uranium concentrations in the tank samples that represent BY Tank Farm salt cake average approximately ten times lower than for the BYSlCk defined waste. This assessment concludes that the sample data provided the best basis for estimating the uranium inventory.

D4.0 DEFINE THE BEST-BASIS AND ESTABLISH COMPONENT INVENTORIES

An effort is underway to provide waste inventory estimates that will serve as the standard for characterization for the various waste management activities (Hodgson and LeClair 1996). As part of this effort, an evaluation of available chemical information for tank 241-BX-111 was performed including the following:

- Analytical data from two tanks (241-T-104 and 241-BX-112 [DiCenso et al. 1994 and Kupfer and Winward 1997]) that represent the BiPO_4 process 1C waste type in tank 241-BX-111.
- Analytical data from three tanks (241-BY-105, 241-BY-106, and 241-BY-110 [Simpson et al. 1995, Bell et al. 1996, and Simpson et al. 1996]) that contain the same salt cake waste type that is in tank 241-BX-111. The salt cake in tank 241-BX-111 resulted from evaporation of supernatants in the BY Tank Farm using in-tank heaters (ITS campaigns).
- Inventory estimates generated by the HDW model (Agnew et al. 1996).

There are no tank sample data for tank 241-BX-111 that can be used to estimate tank waste component inventories. The results from this engineering assessment support using an estimated inventory based primarily on the analytical results for tank 241-BX-112 (for 1C waste), and tanks 241-BY-105, 241-BY-106, and 241-BY-110 (for BY Tank Farm salt cake) for the following reasons:

- Evaluation of waste transaction data support the Agnew et al. (1996) basis that tank 241-BX-111 contains a mixture of 1C waste and salt cake from ITS operations in BY Tank Farm.
- The analytical results from tanks 241-T-104 and 241-BX-112, which contain only 1C waste, correlate well with predicted inventories for these tanks based on process flowsheets. Assessments have shown that the analytical-based compositions for these tanks can be extrapolated to the same waste type in other tanks, particularly if the tanks are in a cascade arrangement. This assumption must be considered tenuous at this time with resolution provided by possible future sampling of tank 241-BX-111.
- The concentrations of components from waste solids for three tanks (241-BY-105, 241-BY-106, and 241-BY-110) containing salt cake in the BY Tank Farm are reasonably consistent among themselves, and with predicted salt cake from the HDW model (BYSltCk). The sample data for the BY Tank Farm tanks are expected to be representative of the salt cake in tank 241-BX-111 since the source for the salt cake is from the ITS evaporation campaign in BY Tank Farm.

Best-basis inventory estimates for tank 241-BX-111 are presented in Tables D4-1 and D4-2. The quality of the estimate for chemical and radionuclide components is considered low since the inventories are extrapolated from data from other tanks. The HDW model bases are used as best basis where there was no sample basis. Radionuclide curie values are decayed to January 1, 1994.

Best-basis tank inventory values were derived for 46 key radionuclides (as defined in Section 3.1 of Kupfer et al. 1997), all decayed to a common report date of January 1, 1994. Often, waste sample analyses were only reported for total beta, total alpha, ^{90}Sr , ^{137}Cs , $^{239/240}\text{Pu}$, and total uranium, while other key radionuclides such as ^{60}Co , ^{99}Tc , ^{129}I , ^{154}Eu , ^{155}Eu , and ^{241}Am , etc., were infrequently reported. For this reason it has been necessary to derive most of the 46 key radionuclides by computer models. These models estimate radionuclide activity in batches of reactor fuel, account for the split of radionuclides to various separations plant waste streams, and track their movement with tank waste transactions. (These computer models are described in Kupfer et al. 1997, Section 6.1 and in Watrous and Wootan 1997.)

Model generated values for radionuclides in any of 177 tanks are reported in the HDW Rev. 4 model results (Agnew et al. 1997). The best-basis value for any one analyte may be either a model result or a sample or engineering assessment-based result if available. (No attempt has been made to ratio or normalize model results for all 46 radionuclides when values for measured nuclides disagree with the model.) For a discussion of typical error between model derived values and sample derived values, see Kupfer et al. 1997, Section 6.1.10.

Best-basis tables for chemicals and only four radionuclides (^{90}Sr , ^{137}Cs , Pu, and U) were being generated in 1996, using values derived from an earlier version (Rev. 3) of the HDW model. When values for all 46 radionuclides became available in Rev. 4 of the HDW model, they were merged with draft best-basis chemical inventory documents. Defined scope of work in FY 1997 did not permit Rev. 3 chemical values to be updated to Rev. 4 chemical values.

The inventory values reported in Tables D4-1 and D4-2 are subject to change. Refer to the Tank Characterization Database (TCD) for the most current inventory values.

Table D4-1. Sample-based Best-Basis Inventory Estimate for Nonradioactive Components in Tank 241-BX-111 (Effective January 31, 1997). (2 sheets)

Analyte	Total inventory (kg)	Basis (S, M, C, or E) ¹	Comment
Al	22,600	E	
Bi	2,820	E	
Ca	753	E	
Cl	2,180	E	
TIC as CO ₂	116,000	E	
Cr	1,780	E	
F	7,330	E	
Fe	2,110	E	
Hg	6.33	M	
K	2,050	E	
La	0.304	M	
Mn	96.3	E	
Na	260,000	E	
Ni	123	E	
NO ₂	32,000	E	
NO ₃	400,000	E	
OH _{TOTAL}	26,400	C	
Pb	<147	E	
PO ₄	18,740	E	
Si	1,640	E	
SO ₄	16,900	E	
Sr	95	E	
TOC	4,660	E	
U _{TOTAL}	598	E	
Zr	41	E	

¹S = Sample-based

M = Hanford Defined Waste model-based, Agnew et al. (1996)

E = Engineering assessment-based

C = Calculated by charge balance; includes oxides as "hydroxide" not including CO₃, NO₂, NO₃, PO₄, SO₄, and SiO₃.

Table D4-2. Best-Basis Inventory Estimate for Radioactive Components in Tank 241-BX-111 Decayed to January 1, 1994 (Effective January 31, 1997). (2 Sheets)

Analyte	Total inventory (Ci)	Basis (S, M, or E) ¹	Comment
³ H	88.5	M	
¹⁴ C	23	M	
⁵⁹ Ni	2.46	M	
⁶⁰ Co	21.6	M	
⁶³ Ni	244	M	
⁷⁹ Se	1.94	M	
⁹⁰ Sr	27,400	E	
⁹⁰ Y	27,400	E	Referenced to ⁹⁰ Sr
^{93m} Nb	6.75	M	
⁹³ Zr	9.34	M	
⁹⁹ Tc	128	M	
¹⁰⁶ Ru	0.0043	M	
^{113m} Cd	49.4	M	
¹²⁵ Sb	96.6	M	
¹²⁶ Sn	2.89	M	
¹²⁹ I	0.249	M	
¹³⁴ Cs	1.05	M	
^{137m} Ba	102,000	E	Referenced to ¹³⁷ Cs
¹³⁷ Cs	108,000	E	
¹⁵¹ Sm	6,690	M	
¹⁵² Eu	3.04	M	
¹⁵⁴ Eu	364	M	
¹⁵⁵ Eu	184	M	
²²⁶ Ra	9.35 E-05	M	
²²⁷ Ac	0.00132	M	
²²⁸ Ra	1.15	M	
²²⁹ Th	0.0266	M	
²³¹ Pa	0.00679	M	

Table D4-2. Best-Basis Inventory Estimate for Radioactive Components in Tank 241-BX-111 Decayed to January 1, 1994 (Effective January 31, 1997). (2 Sheets)

Analyte	Total inventory (Ci)	Basis (S, M, or E) ¹	Comment
²³² Th	0.0425	M	
²³² U	6.42	M	
²³³ U	24.6	M	
²³⁴ U	3.51	M	
²³⁵ U	0.143	M	
²³⁶ U	0.0761	M	
²³⁷ Np	0.431	M	
²³⁸ Pu	1.77	M	
²³⁸ U	5.44	M	
²³⁹ Pu	68.2	M	
²⁴⁰ Pu	11.2	M	
²⁴¹ Am	30.2	M	
²⁴¹ Pu	126	M	
²⁴² Cm	5.17 E-04	M	
²⁴² Pu	6.06 E-04	M	
²⁴³ Am	0.00104	M	
²⁴³ Cm	1.06 E-05	M	
²⁴⁴ Cm	1.46 E-04	M	

¹S = Sample-based

M = Hanford Defined Waste model-based, Agnew et al. (1997)

E = Engineering assessment-based.

This page intentionally left blank.

D5.0 APPENDIX D REFERENCES

- Agnew, S. F., R. A. Corbin, T. B. Duran, K. A. Jurgensen, T. P. Ortiz, and B. L. Young, 1995, *Waste Status and Transaction Record Summary (WSTRS Rev. 2)*, WHC-SD-WM-TI-615, -614, -669, -689, Rev. 2, Los Alamos National Laboratory, Los Alamos, New Mexico.
- Agnew, S. F., J. Boyer, R. A. Corbin, T. B. Duran, J. R. FitzPatrick, K. A. Jurgensen, T. P. Ortiz, and B. L. Young, 1996, *Hanford Tank Chemical and Radionuclide Inventories: HDW Model Rev. 3*, LA-UR-96-858, Los Alamos National Laboratory, Los Alamos, New Mexico.
- Agnew, S. F., J. Boyer, R. A. Corbin, T. B. Duran, J. R. FitzPatrick, K. A. Jurgensen, T. P. Ortiz, and B. L. Young, 1997, *Hanford Tank Chemical and Radionuclide Inventories: HDW Model Rev. 4*, LA-UR-96-3860, Los Alamos National Laboratory, Los Alamos, New Mexico.
- Anderson, J. D., 1990, *A History of the 200 Area Farms*, WHC-MR-0132, Westinghouse Hanford Company, Richland, Washington.
- Bell, K. E., J. D. Franklin, J. L. Stroup, J. L. Huckaby, 1996, *Tank Characterization Report for Single-Shell Tank 241-BY-106*, WHC-SD-WM-ER-616, Rev. 0, Westinghouse Hanford Company, Richland, Washington.
- Brevick, C. H., R. L. Newell, and J. W. Funk, 1996, *Historical Tank Content Estimate for the Northeast Quadrant of the Hanford 200 East Area*, WHC-SD-WM-ER-349, Rev. 1, Westinghouse Hanford Company, Richland, Washington.
- DiCenso, A. T., L. C. Amato, J. D. Franklin, G. L. Nuttal, K. W. Johnson (LANL), and B. C. Simpson (WHC), 1994, *Tank Characterization Report for Single-Shell Tank 241-T-104*, WHC-SD-WM-ER-372, Rev. 0, Westinghouse Hanford Company, Richland, Washington.
- Hanlon, B. M., 1996, *Waste Tank Summary Report for Month Ending May 31, 1996*, WHC-EP-182-99, Westinghouse Hanford Company, Richland, Washington.
- Hill, J. G., G. S. Anderson, and B. C. Simpson, 1995, *The Sort on Radioactive Waste Type Model: A Method to Sort Single-Shell Tanks into Characteristic Groups*, PNL-9814, Rev. 2, Pacific Northwest Laboratory, Richland, Washington.
- Hodgson, K. M., and M. D. LeClair, 1996, *Work Plan for Defining a Standard Inventory Estimate for Wastes Stored in Hanford Site Underground Tanks*, WHC-SD-WM-WP-311, Rev. 1, Lockheed Martin Hanford Corporation, Richland, Washington.

Kupfer, M. J., A. L. Boldt, B. A. Higley, K. M. Hodgson, L. W. Shelton, B. C. Simpson, and R. A. Watrous (LMHC), S. L. Lambert, and D. E. Place (SESC), R. M. Ormie (NHC), G. L. Borsheim (Borsheim Associates), N. G. Colton (PNNL), M. D. LeClair (SAIC), R. T. Winward (Meier Associates), and W. W. Schulz (W²S Corporation), 1997, *Standard Inventories of Chemicals and Radionuclides in Hanford Site Tank Wastes*, HNF-SD-WM-TI-740, Rev. 0, Lockheed Martin Hanford Corporation, Richland, Washington.

Kupfer, M. J., and R. T. Winward (Meier Associates), 1997, *Tank Characterization Report for Single-Shell Tank 241-BX-112*, WHC-SD-WM-ER-602, Rev. 0A, Lockheed Martin Hanford Corporation, Richland, Washington.

Schneider, K. L., 1951, *Flow Sheets and Flow Diagrams of Precipitation Separations Process*, HW-23043, Hanford Atomic Products Operation, Richland, Washington.

Simpson, B. C., J. G. Field, L. M. Sasaki, 1996a, *Tank Characterization Report for Single-Shell Tank 241-BY-105*, WHC-SD-WM-ER-598, Rev. 0, Westinghouse Hanford Company, Richland, Washington.

Simpson, B. C., R. D. Cromar, R. D. Schreiber, 1996b, *Tank 241-BY-110 Characterization Report*, WHC-SD-WM-ER-591, Rev. 0, Westinghouse Hanford Company, Richland, Washington.

Watrous, R. A., and D. W. Wootan, 1997, *Activity of Fuel Batches Processed Through Hanford Separations Plants, 1944 Through 1989*, HNF-SD-WM-TI-794, Rev. 0, Lockheed Martin Hanford Corporation, Richland, Washington.