

Hanford Federal Facility Agreement and Consent Order  
(Tri-Party Agreement)

---

Draft Engineering Evaluation/Cost Analysis  
(EE/CA) for the 224-B Plutonium  
Concentration Facility

**RECEIVED**  
DEC 11 2003  
**EDMC**

Public Comment Period  
December 15, 2003 thru January 16, 2004



U. S. Department of Energy  
U.S. Environmental Protection Agency  
Washington State Department of Ecology


*Hanford Federal Facility Agreement and Consent Order (Tri-Party Agreement)*  
Proposed Modifications and Reference Documents for

**Draft Engineering Evaluation/Cost Analysis  
(EE/CA) for the 224-B Plutonium  
Concentration Facility**

Table of Contents

Fact Sheet

*Draft Engineering Evaluation/Cost Analysis (EE/CA) for the 224-B  
Plutonium Concentration Facility*

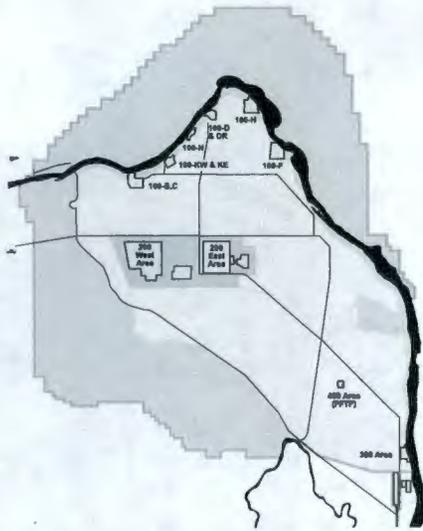

# Next Steps for the 224-B Plutonium Concentration Facility

U.S. Department of Energy · Washington State Department of Ecology · U.S. Environmental Protection Agency

The U.S. Department of Energy (USDOE), Washington State Department of Ecology, and the U.S. Environmental Protection Agency (Tri-Party Agreement agencies) would like your input on an Engineering Evaluation/Cost Analysis (EE/CA) for the 224-B Plutonium Concentration Facility located in the 200 Area on the Hanford Site. The EE/CA evaluates alternatives for the disposition of this facility.



224-B plutonium concentration facility

## Background

The 224-B facility located in the 200 East Area of the Hanford Site, was used to recover plutonium following the reprocessing of spent nuclear fuel. These activities were performed in conjunction with operations at B-Plant from 1944 to 1952. This facility contains both radiological and chemical contaminants.

The 224-B building is currently an inactive facility. USDOE has identified no further use for the facility making it a candidate for decontamination and demolition.

## Public Comment

The Tri-Party agencies want your feedback on the draft 224-B EE/CA. The public comment period will be from **December 15, 2003 through January 16, 2004.**

## What is an Engineering Evaluation/Cost Analysis?

An Engineering Evaluation/Cost Analysis (EE/CA) evaluates feasible and cost-effective alternatives for proposed removal actions, and recommends a specific removal action under the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA).

A Removal Action is an immediate action taken over the short term to address a release or threatened release of hazardous substances. The 224-B Plutonium Concentration Facility is a non-time-critical removal action. This draft EE/CA identifies the goals of a non-time critical removal action, identifies and evaluates the various removal alternatives and recommends a given alternative for the 224-B facility.

## What Cleanup Actions Were Evaluated?

The removal action for the 224-B facility must protect human health and the environment, and otherwise meet the removal action objectives identified in the evaluation. Based on these criteria, the following removal action alternatives were evaluated:

1. No Action
2. Continued surveillance and maintenance
3. Decontaminate and demolish to grade, excluding building foundation and underlying soils/structures
4. Decontaminate and demolish, including building foundation and underlying soils/structures to 39 inches below foundation



# Fact Sheet

The recommended alternative is to decontaminate and demolish to grade, excluding the building foundation and underlying soils and structures (Alternative 3). Environmental sampling will be conducted in conjunction with, or following, decontamination and demolition activities in order to assess whether cleanup and stabilization objectives have been achieved. Following analysis of sampling results, DOE and EPA will jointly determine whether additional cleanup activities at the site should be deferred to a subsequent CERCLA remedial action, or taken under this removal action.

## How you can become involved

A 30-day public comment period on the draft 224-B EE/CA will be from *December 15 through January 16, 2004*. The Tri-Party agencies would like your feedback on this draft document and will consider all comments before finalizing it. **To request a copy of the draft document or submit comments contact:**

**Larry Romine**  
U.S. Department of Energy  
Richland Operations Office  
P.O. Box 550 (A6-33)  
Richland, WA 99352  
Phone: (509) 376-4747  
Fax: (509) 376-0695  
Larry\_D\_Romine@rl.gov

**Craig Cameron**  
U.S. Environmental Protection Agency  
Hanford Project Office  
712 Swift Blvd., Suite 5  
Richland, WA 99352  
Phone: (509) 376-8665  
Fax: (509) 376-2396  
cameron.craig@epa.gov

The Draft EE/CA can be viewed online at <http://www.hanford.gov/calendar>  
under the Public Comment Period section

The draft document is also available for review at the  
Public Information Repositories listed below.

### HANFORD PUBLIC INFORMATION REPOSITORY LOCATIONS

**Portland**  
Portland State University  
Branford Price and Millar Library  
934 SW Harrison  
Attn: Michael Bowman (503) 725-3690

**Richland**  
U.S. Department of Energy Public Reading Room  
Washington State University, Tri-Cities  
Consolidated Information Center, Room 101-L  
2770 University Drive  
Attn: Janice Parthree (509) 372-7443

**Seattle**  
University of Washington  
Suzzallo Library  
Government Publications Division  
Attn: Eleanor Chase (206) 543-4664

**Spokane**  
Gonzaga University Foley Center  
East 502 Boone  
Attn: Sarah Nelson (509) 323-6548

Information Repository web site address:  
<http://www2.hanford.gov/arpit/>

# Engineering Evaluation/Cost Analysis for the 224-B Plutonium Concentration Facility

Prepared for the U.S. Department of Energy  
Assistant Secretary for Environmental Management



**United States  
Department of Energy**  
P.O. Box 550  
Richland, Washington 99352

Project Hanford Management Contractor for the  
U.S. Department of Energy under Contract DE-AC06-96RL13200

Approved for Public Release  
(Upon receipt of Clearance approval)  
Further Dissemination Unlimited

# Engineering Evaluation/Cost Analysis for the 224-B Plutonium Concentration Facility

December 2003

Prepared for the U.S. Department of Energy  
Assistant Secretary for Environmental Management



**United States  
Department of Energy**  
P.O. Box 550  
Richland, Washington 99352

Project Hanford Management Contractor for the  
U.S. Department of Energy under Contract DE-AC06-96RL13200

Chris Killingham      12/11/03  
Clearance Approval      Date

N/A  
Yes  
Release Approval (stamp)

Approved for Public Release  
(Upon receipt of Clearance approval)  
Further Dissemination Unlimited

For use with Technical Documents (when appropriate)	
EDC-	FMP-
EDT-	ECN-
Project No.:	Division:
Document Type: ENV	Page Count: 47

For use with Speeches, Articles, or Presentations (when appropriate)			
Abstract	Summary	Full Paper	Visual Aid
Conference Name:			
Conference Date:			
Conference Location:			
Conference Sponsor:			
Published in:			
Publication Date:			

**LEGAL DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Scientific or technical information is available to U.S. Government and U.S. Government contractor personnel through the Office of Scientific and Technical Information (OSTI). It is available to others through the National Technical Information Service (NTIS).

This report has been reproduced from the best available copy.

## CONTENTS

ACRONYMS .....	v
1.0 INTRODUCTION.....	1-1
1.1 REGULATORY OVERVIEW .....	1-1
1.1.1 Regulatory Framework/Decommissioning Policy .....	1-1
1.1.2 EPA Involvement .....	1-1
1.1.3 Stakeholder Involvement.....	1-2
1.1.4 NEPA Values .....	1-2
1.2 SCOPE OF REMOVAL ACTION .....	1-2
1.3 RELATED CLEANUP ACTIONS.....	1-2
1.3.1 Facility Deactivation .....	1-2
1.3.2 Belowgrade Contamination.....	1-3
1.3.3 Canyon Disposition Initiative.....	1-3
2.0 SITE CHARACTERIZATION .....	2-1
2.1 BACKGROUND AND SITE DESCRIPTION.....	2-1
2.1.1 Land-Use Access.....	2-1
2.1.2 Flora and Fauna.....	2-1
2.1.3 Cultural Resources .....	2-4
2.2 FACILITY DESCRIPTION.....	2-4
2.3 SOURCE, NATURE, AND EXTENT OF CONTAMINATION.....	2-5
2.4 RISK EVALUATION AND SITE CONDITIONS THAT JUSTIFY A REMOVAL ACTION .....	2-7
3.0 REMOVAL ACTION OBJECTIVES.....	3-1
4.0 DISCUSSION OF ALTERNATIVES .....	4-1
4.1 ALTERNATIVE ONE: NO ACTION.....	4-3
4.1.1 Cost Estimates for Alternative One: No Action.....	4-3
4.2 ALTERNATIVE TWO: CONTINUED S&M.....	4-3
4.2.1 Cost Estimates for Alternative Two: Continued S&M .....	4-4
4.3 ALTERNATIVE THREE: D&D (TO GRADE, EXCLUDING BUILDING FOUNDATION AND UNDERLYING SOILS/STRUCTURES).....	4-5
4.3.1 Cost Estimates For Alternative Three .....	4-6
4.4 ALTERNATIVE FOUR: D&D (INCLUDING BUILDING FOUNDATION and UNDERLYING SOILS/STRUCTURES TO 1 METER BELOW FOUNDATION).....	4-7
4.4.1 Cost Estimates For Alternative Four .....	4-7
5.0 ANALYSIS OF ALTERNATIVES .....	5-1
5.1 EFFECTIVENESS.....	5-1
5.1.1 Overall Protection of Human Health and the Environment .....	5-1
5.1.2 Compliance with Applicable or Relevant and Appropriate Requirements .....	5-2
5.1.3 Long-Term Effectiveness and Permanence.....	5-10
5.1.4 Reduction of Toxicity, Mobility, or Volume Through Treatment .....	5-11
5.1.5 Short-Term Effectiveness.....	5-11
5.2 IMPLEMENTABILITY.....	5-12
5.3 COST.....	5-12

---

**CONTENTS (cont)**

5.4 OTHER CONSIDERATIONS..... 5-13  
6.0 RECOMMENDED ALTERNATIVE..... 6-1  
7.0 REFERENCES..... 7-1

**FIGURES**

Figure 2-1. Hanford Site and Washington State..... 2-2  
Figure 2-2. B Plant Complex Region of 200 East Area..... 2-3

**TABLES**

Table 2-1. Plutonium/Americium Inventory Distribution in the 224-B Facility..... 2-5  
Table 2-2. Suspected Nonradiological Contaminants in the 224-B Facility  
(Source: SD-DD-PP-002). ..... 2-6  
Table 4-1. Cost Estimate for Alternative Two: Continued S&M..... 4-5  
Table 4-2. Cost Estimate for Alternative Three: D&D (To Grade, Excluding Building Foundation  
and Underlying Soils/Structures)..... 4-6  
Table 4-3. Cost Estimate for Alternative Four: D&D (Including Building Foundation and  
Underlying Soils/Structures to 1 Meter Below Foundation). ..... 4-8  
Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and  
To Be Considered Information for the 224-B Facility..... 5-5  
Table 5-2. Total Costs for the 224-B Facility Removal Action Alternatives..... 5-12

---

## ACRONYMS

ACM	asbestos-containing material
ALARACT	as low as reasonably achievable control technology
AM	action memorandum
ARAR	applicable or relevant and appropriate requirement
BARCT	best available radionuclide control technology
CERCLA	<i>Comprehensive Environmental Response, Compensation and Liability Act of 1980</i>
CDI	Canyon Disposition Initiative
CFR	<i>Code of Federal Regulations</i>
CWC	Central Waste Complex
D&D	decontamination and demolition
DOE	U.S. Department of Energy
Ecology	State of Washington Department of Ecology
EE/CA	engineering evaluation/cost analysis
EIS	environmental impact statement
EPA	U.S. Environmental Protection Agency
ERDF	Environmental Restoration Disposal Facility
ESD	explanation of significant differences
ETF	200 Areas Effluent Treatment Facility
LLW	low-level waste
NEPA	<i>National Environmental Policy Act of 1969</i>
NPL	National Priorities List
OMB	U.S. Office of Management and Budget
PCB	polychlorinated biphenyl
RCRA	<i>Resource Conservation and Recovery Act of 1976</i>
RCW	<i>Revised Code of Washington</i>
ROD	record of decision
S&M	surveillance and maintenance
TBC	to-be-considered
Tri-Party Agreement	<i>Hanford Federal Facility Agreement and Consent Order</i>
TRU	transuranic
TSCA	<i>Toxic Substances Control Act of 1976</i>
TSD	treatment, storage, and/or disposal
USC	<i>United States Code</i>
WAC	<i>Washington Administrative Code</i>
WIPP	Waste Isolation Pilot Plant

This page intentionally left blank.

## 1.0 INTRODUCTION

This document presents the results of an engineering evaluation/cost analysis (EE/CA) that addresses the disposition of the 224-B Plutonium Concentration Facility (224-B Facility). The 224-B Facility, which is located on the Hanford Site in the 200 East Area, once was used to facilitate plutonium recovery following the reprocessing of spent nuclear fuel. Plutonium concentration operations were performed in conjunction with B Plant Complex separations activities from approximately 1944 to 1952. The process components were deactivated shortly thereafter. These past operations resulted in contamination throughout the process portion of the structure. The 224-B Facility is currently an inactive surplus facility and is administered under a surveillance and maintenance (S&M) program while awaiting disposition. The U.S. Department of Energy (DOE) has identified no further use for the 224-B Facility, making the 224-B Facility a candidate for decontamination and demolition (D&D).

### 1.1 REGULATORY OVERVIEW

#### 1.1.1 Regulatory Framework/Decommissioning Policy

Four areas of the Hanford Site, including the 200 Areas, were placed on the U.S. Environmental Protection Agency's (EPA) *Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) of 1980* National Priorities List (NPL) in November 1989. The work for cleanup of these NPL sites continues in accordance with the *Hanford Federal Facility Agreement and Consent Order (Tri-Party Agreement)* (Ecology et al. 1994) and the National Contingency Plan regulations of 40 *Code of Federal Regulations (CFR) 300*.

The DOE and the EPA have agreed on an approach for decommissioning surplus facilities consistent with the requirements of CERCLA. The approach is documented in the "*Policy on Decommissioning Department of Energy Facilities Under CERCLA*" (hereinafter referred to as the Policy) issued jointly by DOE and EPA on May 22, 1995 (DOE and EPA, 1995). The Policy is based on the provisions of Executive Order 12580, which delegates from the President to the Secretary of Energy certain CERCLA response authorities for facilities under DOE jurisdiction, custody, or control. The Policy establishes that decommissioning activities might be conducted as non-time critical removal actions unless the circumstances at the facility make this inappropriate.

The 224-B Facility is located within the 200 Areas NPL, but is not specifically part of a remedial action operable unit. The 224-B Facility contains CERCLA hazardous substances, predominantly residual radionuclides, and quantities of residual hazardous chemicals. Following the deactivation of the 224-B Facility in 1976, the integrity of the structure and internal systems has degraded, resulting in an increased potential for releases of these hazardous substances to the environment. The DOE has determined that a non-time-critical removal action is warranted to mitigate this threat.

#### 1.1.2 EPA Involvement

EPA involvement will be in accordance with the Policy and the Tri-Party Agreement, as appropriate, to ensure that the removal action activities comply with applicable requirements, that protection of human health and the environment is achieved, and that the removal action is consistent with ongoing or subsequent related remedial actions. Accordingly, EPA approval will be sought for the Action Memorandum (AM) from this EE/CA process and for the sampling and analysis plan.

### 1.1.3 Stakeholder Involvement

Actions taken pursuant to the results of the 224-B Facility EE/CA will be conducted in compliance with the community relations and public participation requirements established in 40 CFR 300.415(n) and any applicable DOE policies. This EE/CA will be provided to the public consistent with the provisions of 40 CFR 300.415(n)(4). After a reasonable opportunity to comment is provided, a written response to significant comments will be provided in accordance with 40 CFR 300.820(a).

After all public comments have been dispositioned, an AM will document the selected removal action. The AM and the 224-B Facility EE/CA will be placed in an Administrative Record that will be established to provide a publicly accessible record. The Administrative Record will be accessible to the public for inspection and copying, consistent with the requirement of 40 CFR 300.415(n)(3)(iii).

The State of Washington Department of Ecology (Ecology) is authorized by EPA to implement and enforce a hazardous waste program in lieu of the federal *Resource Conservation and Recovery Act (RCRA) of 1976*.

### 1.1.4 NEPA Values

In accordance with the Secretary of Energy's Policy Statement on the *National Environmental Policy Act (NEPA)* (DOE 1994), NEPA values have been incorporated into this EE/CA to the extent practicable.

## 1.2 SCOPE OF REMOVAL ACTION

The 224-B Facility removal action scope is to mitigate the risks associated with the residual hazardous substance inventory contained within the deteriorating aboveground structure. The scope does not include activities that might be performed in preparation for the removal action, nor does the scope include full remediation of potential belowgrade contamination. These are the subjects of other actions as discussed in Section 1.3.

## 1.3 RELATED CLEANUP ACTIONS

Other cleanup actions related to the 224-B Facility proposed removal action include deactivation, remediation of potential belowgrade contamination, and the Canyon Disposition Initiative (CDI). Their relationship to the proposed removal action and potential impacts are described in the following sections.

### 1.3.1 Facility Deactivation

Much of the 224-B Facility was deactivated within a few years after operations ended. Deactivation included removing bulk process and waste streams and stabilizing the facility. Additional deactivation-type activities might be performed before initiating any work covered by this removal action scope. If implemented, these activities would focus on removing additional transuranic (TRU) waste to reduce the risk to personnel and the environment during D&D. Any waste generated will be managed appropriately. This removal would not substantially affect the analysis or the selection of an appropriate removal action.

### **1.3.2 Belowgrade Contamination**

The majority of the potential belowgrade contamination is not included in this removal action scope. Belowgrade sources of contamination could include subsurface structures, pipelines, drains, or unplanned releases from previous activities. The belowgrade sources of contamination will be subject to future evaluation. The proposed removal action includes facilitating a smooth transition to the subsurface remediation process as one of the goals.

### **1.3.3 Canyon Disposition Initiative**

The CDI project was initiated in 1996 and addresses the disposition of the five canyon facilities in the 200 Areas. The DOE is using the U Plant as a pilot to prepare a feasibility study and proposed plan for the CDI. However, it is intended that the results of the U Plant evaluation will be applied to the other canyon facilities. The concept behind the CDI is disposition of the canyon facilities in place instead of demolishing these and burying the debris elsewhere. Because the 224-B Facility is adjacent to the B Plant Complex canyon facility, one of the five canyon facilities included in the CDI, any alternative for removal actions at the 224-B Facility is expected to be consistent with remedial action alternatives considered for the CDI. Any alternative selected for final remedial action in the B Plant Complex canyon area would not be affected adversely by any of the removal action alternatives considered in this EE/CA.

This page intentionally left blank.

## 2.0 SITE CHARACTERIZATION

This section of the document describes the site of the proposed action, the source, nature, and extent of contamination at the site, and the justification for the proposed action.

### 2.1 BACKGROUND AND SITE DESCRIPTION

The 224-B Facility is located within the B Plant Complex in the 200 East Area of the Hanford Site (Figure 2-1). Highway 240 is to the southwest of the B Plant Complex, and the Columbia River is north-northwest. The 224-B Facility is a deactivated plutonium concentration facility that formerly was associated with the B Plant Complex (Figure 2-2). The 224-B Facility was used to purify and concentrate diluted plutonium nitrate solution that was the product of the 221-B (B Plant Complex) bismuth-phosphate process. The solution was transferred to the 231-Z Isolation Building. Plutonium concentration operations were performed in conjunction with B Plant Complex separations activities from approximately 1944 to 1952. The process components were deactivated shortly thereafter. The 224-B Facility currently is designated as an inactive, surplus facility, awaiting disposition.


#### 2.1.1 Land-Use Access

Public access to the Hanford Site currently is restricted and controlled at the Wye Barricade on Route 4 and the Yakima and Rattlesnake Barricades on State Highway 240 (Figure 2-1). Proposed alternatives for future land use were described in the *Hanford Comprehensive Land-Use Plan Environmental Impact Statement* (DOE/EIS-0222-F). The Record of Decision (ROD) for that EIS identifies land use in the 200 East Area as industrial-exclusive use for the foreseeable future (64 FR 61615). The onsite Future Site Uses Working Group and the Exposure Scenario Taskforce also are sources for additional guidance on land use.

#### 2.1.2 Flora and Fauna


The land area around the 224-B Facility predominantly is disturbed from building and parking lot construction activities. What little plant community does exist primarily is composed of semi-arid species common to disturbed areas, such as cheatgrass, rabbitbrush, and other nonnative plant species. Current fauna in this area includes, but is not limited to, rabbits, mice and coyotes. There are no known plants or animals on the federal or state list of endangered and threatened wildlife and plants in the vicinity of the 224-B Facility. If new information reveals the presence of such wildlife or plants in the vicinity of this facility, appropriate measures will be taken as necessary. Further information on ecological resources in the 200 Areas and threatened, endangered, and candidate species at the Hanford Site is available in PNL-6415. There are no perennial or ephemeral streams in the 200 Areas. There are no regulated wetlands within the 200 East Area.

Figure 2-1. Hanford Site and Washington State.

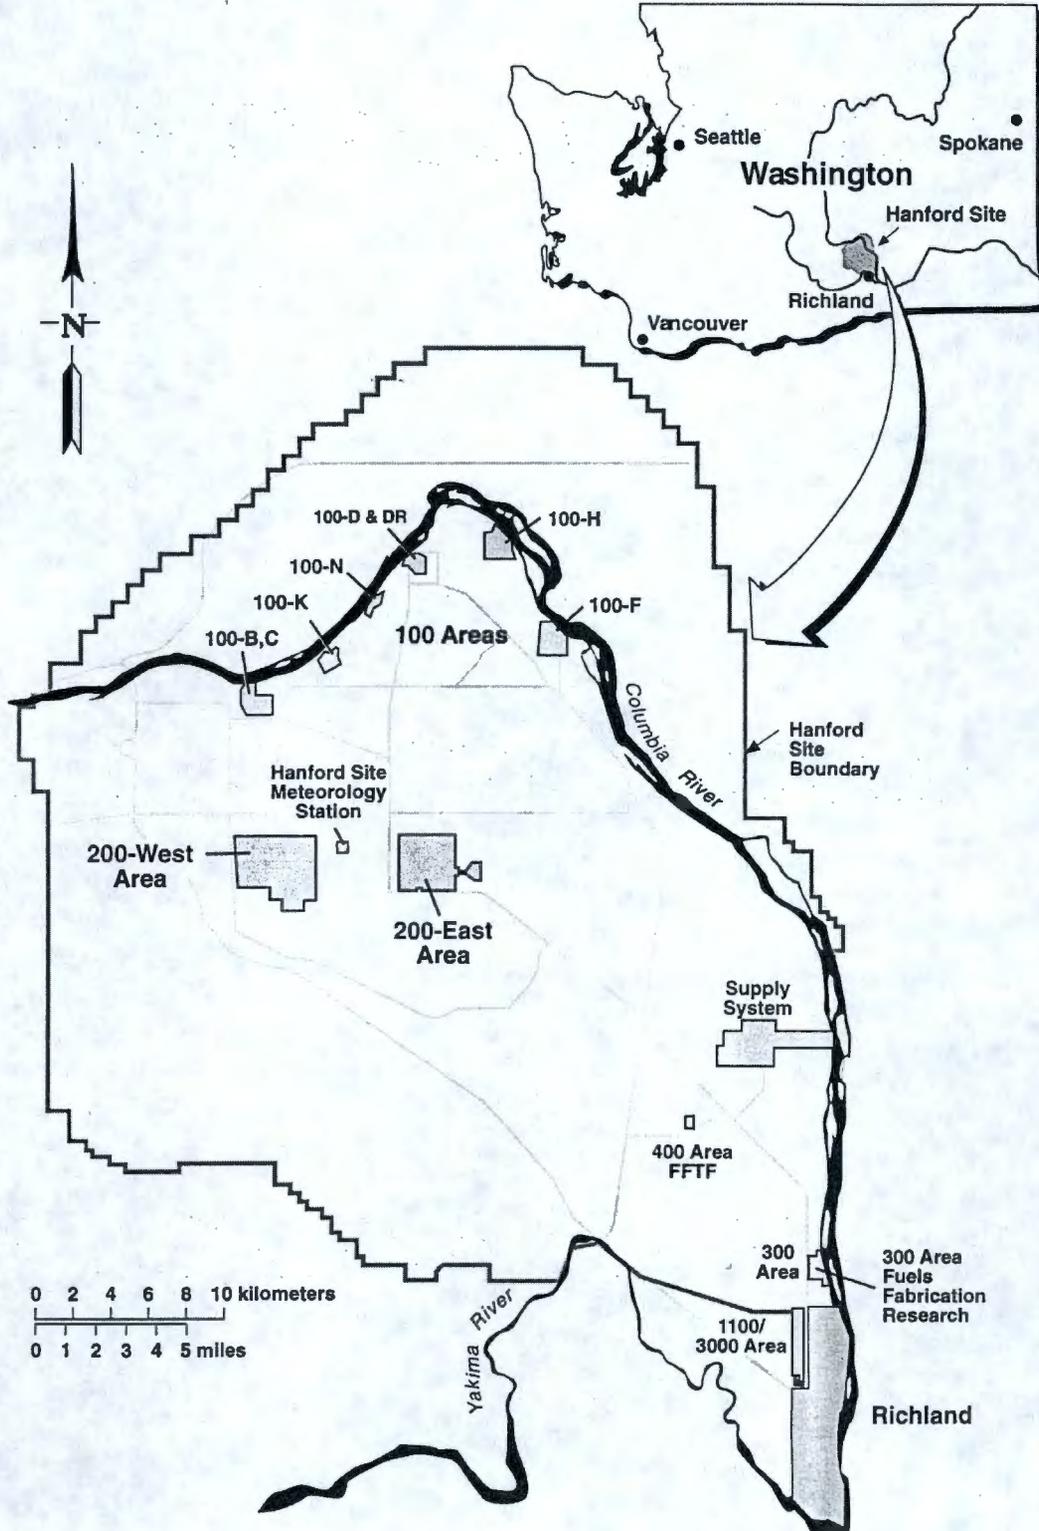

E9803090.4

Figure 2-2. B Plant Complex Region of 200 East Area.

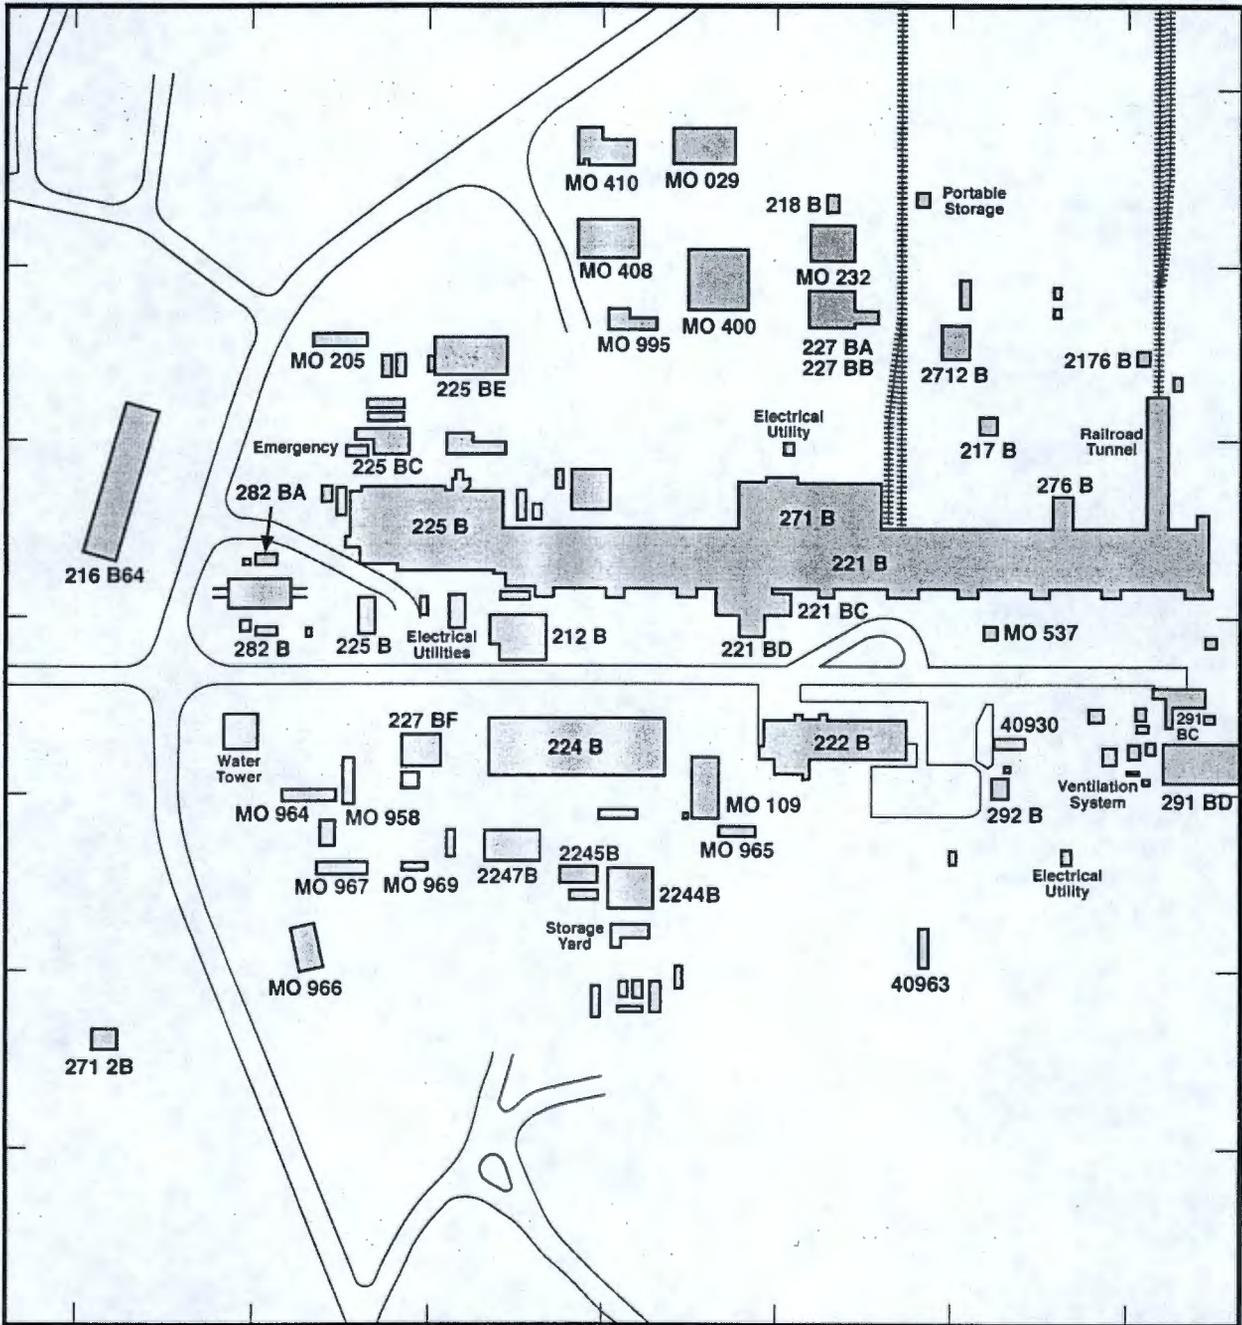

E0303074\_1  
03/24/03

### 2.1.3 Cultural Resources

The 224-B Facility was determined to be a contributing property to the Hanford Site Manhattan Project/Cold War Era Historic District. However, the 224-B Facility was not selected for individual documentation or mitigation (DOE/RL-97-56), and is acceptable for demolition.

Walkthroughs of the facility were performed on June 16, 1999, and June 5, 2003, by assessment teams that consisted of DOE and contractor personnel. The following items were tagged for retention as items with interpretive or public education value:

- CP0014F Cell Loadout Process Control Board (2nd floor-west)
- CP0015Fire Blanket Box with Fire Blanket (2nd floor-central)
- CP0016Main Process Control Board (3rd floor)
- CP0017Spray Pump for Centrifuges D and E (3rd floor).

These items will be removed and stored, if possible, based on potential radiological contamination issues, before demolition of the structure.

No archaeological resources or traditional use areas have been found to exist within the proposed project location.

## 2.2 FACILITY DESCRIPTION

The 224-B Facility consists of a single canyon-type building. The building is constructed of reinforced concrete and concrete block. The first and second floors have approximate outside dimensions of 60 meters by 18 meters. The third floor is 44.3 meters by 18 meters. The building is divided into two main sections along its length by a 0.3-meter-thick concrete wall. Offices and galleries are on the north side of the dividing wall, and six processing cells, identified by letters A through F, are on the south side.

The process cells are located in the processing portion of the building. Cells A to E are three stories high (12 meters) and are separated from each other by 4.5-meters-high, 0.2-meter-thick concrete walls. Chemical processing was performed in A, B, D, and E cells, which are similar in equipment and configuration. C cell received dilute plutonium solutions from the 221-B Facility and waste that was generated within the 224-B Facility. C cell is different from cells A to E, as approximately half of C cell is a deep cell, with a floor 5.7 meters below the other cells, and has a pipe tunnel extending 10 meters from the deep cell beneath the first floor offices to a pipe encasement. Cell F was the final concentration and plutonium nitrate loadout area. The F cell (15.3 meters by 7.6 meters by 7.3 meters) is separated from the other cells by a concrete wall; only process and waste piping interconnect F cell with the other cells.

The first floor of the office and gallery portion of the building contained offices, a restroom, change room, lunchroom, and mechanical room.

The room at the west end of the building originally was used as a plutonium loadout room. This area was converted to a workshop with a large rollup door following deactivation of the 224-B Facility.

The second floor gallery side was a pipe gallery for A to E cells and an operating gallery for F cell. The second floor was modified after deactivation for use as an office area and lunchrooms. The third floor

gallery was the operating gallery for A through E cells and contains deactivated aqueous makeup tanks, scales, pumps, and control panels for the five cells.

During operation, the 224-B Facility process tanks were vented through the area stack system, but the cells were exhausted through the roof fans. The fan motors and blades were radiologically contaminated. The roof vents have been closed, but the building is not completely sealed. The inlet air filters for the 224-B Facility also could have picked up contamination from the stack. Presently, the 224-B Facility is tied into the B Plant Complex canyon stack ventilation system, though the ventilation through the 224-B Facility is not strong.

Three sewer systems also were used in the 224-B Facility: cooling water, chemical sewer, and sanitary systems. An internal cell drainage system collected drainage in a waste receiver tank in the deep portion of C cell. The three sewer systems currently are not in use, and rubber plugs have been used to seal some portions of the septic drain system.

### 2.3 SOURCE, NATURE, AND EXTENT OF CONTAMINATION

The 224-B Facility is contaminated with hazardous substances used or generated during plutonium concentration operations. To help identify hazardous substances, several sources of information were used, including characterization data, historical operations, process knowledge, and knowledge of the construction materials. Key radionuclide contaminants are TRUs, including plutonium-239 and americium-241, and mixed fission products such as strontium-90 and cesium-137. The majority of contaminants are found in the form of adherent films and residues encrusted in deactivated process vessels, piping, and ventilation system ductwork. In 1985, a TRU characterization was performed at the 224-B Facility in support of D&D activities. The results of this effort (SD-DD-TRP-002) are summarized in Table 2-1.

Table 2-1. Plutonium/Americium Inventory Distribution in the 224-B Facility.

Cell	Americium-241 (Ci)	Plutonium-239 (Ci) <sup>a</sup>	Plutonium-239 (g)
A	0.059	0.78	12.5
B	0.088	0.78	18.6
C	0.20	2.63	42.3
D	3.5	8.57	138.0
E	0.067	0.88	14.2
F	1.3	17.1	275.0
Total	5.21	31.1	500.0

<sup>a</sup>Plutonium-239 based on facility average plutonium-239/americium-241 mass ratio of 13.14:1.

The inventory contained in Table 2-1 is consistent with the current *224-B Facility Documented Safety Analysis* (BHI-01156). The inventory report indicates a large uncertainty exists in the inventory. Based on this uncertainty, the actual inventory could be approximately twice what is shown in Table 2-1. Also, the potential doses listed in Section 2.4 could be larger. The source term and doses in the current documented safety analysis for 224-B Facility are being updated to the larger values to better address the uncertainty present in the inventory.

The primary hazardous materials of concern are radioactive materials. All known quantities of concentrated hazardous chemicals have been removed from the facility during deactivation and S&M operations. Some residual quantities of hazardous chemicals might remain as hold up or heels in process lines, tanks, and vessels. In addition, the 224-B Facility is anticipated to contain one or more of the following hazardous materials found in most Hanford Site facilities:

- Polychlorinated biphenyls (PCB) and non-PCB light ballasts
- Lead paint
- Lead for shielding
- Mercury switches, gauges, thermometers
- Mercury or sodium vapor lights
- Used oil from motors and pumps
- Unspecified chemical containers
- Friable and nonfriable forms of asbestos.

Specific chemicals that were used during or as part of the plutonium concentration process are listed in Table 2-2.

Table 2-2. Suspected Nonradiological Contaminants in the 224-B Facility (Source: SD-DD-PP-002).

<b>Input Chemicals</b>	
BiPO <sub>4</sub>	Bismuth phosphate
NaBiO <sub>3</sub>	Sodium metabisulfate
Na <sub>2</sub> Cr <sub>2</sub> O <sub>7</sub> •2H <sub>2</sub> O	Sodium chromate
H <sub>3</sub> PO <sub>4</sub>	Phosphoric acid
HNO <sub>3</sub>	Nitric acid
La(NO <sub>3</sub> ) <sub>3</sub> •2NH <sub>4</sub> NO <sub>3</sub> •4H <sub>2</sub> O	Lanthanum ammonium nitrate
H <sub>2</sub> C <sub>2</sub> O <sub>4</sub> •2H <sub>2</sub> O	Oxalic acid
HF	Hydrogen fluoride
KOH	Potassium hydroxide
KMnO <sub>4</sub>	Potassium permanganate
<b>Waste Solutions</b>	
BiPO <sub>4</sub>	Bismuth phosphate
HNO <sub>3</sub>	Nitric acid
LaF <sub>3</sub>	Lanthanum fluoride
KOH	Potassium hydroxide
H <sub>3</sub> PO <sub>4</sub>	Phosphoric acid
NaNO <sub>3</sub>	Sodium nitrate
KNO <sub>3</sub>	Potassium nitrate
Cr(NO <sub>3</sub> ) <sub>3</sub>	Chromium nitrate
HF	Hydrogen fluoride
H <sub>2</sub> C <sub>2</sub> O <sub>4</sub> •2H <sub>2</sub> O	Oxalic acid
Mn(NO <sub>3</sub> ) <sub>2</sub>	Manganese nitrate
NH <sub>4</sub> NO <sub>3</sub>	Ammonium nitrate
KF	Potassium fluoride

Additional characterization would be conducted as part of the removal action activities in accordance with an approved sampling and analysis plan.

## 2.4 RISK EVALUATION AND SITE CONDITIONS THAT JUSTIFY A REMOVAL ACTION

The 224-B Facility is contaminated with hazardous substances, primarily a significant inventory of radionuclides (Table 2-1). Radionuclides are known carcinogens.

The risks to the public and the environment associated with routine S&M activities at the 224-B Facility have not been quantified. However, cell radiological conditions require special precautions for entry.

The *224-B Facility Documented Safety Analysis (BHI-01156)* accident scenario indicates that a seismic event would result in destruction of the 224-B Facility. The bounding accident scenario calculated dose consequences are as follows.

- The calculated dose at 100 m is 12.7 rem.
- The calculated dose at the Columbia River (11.3 km away) is less than 0.009 rem.

The inhalation and ingestion pathways also are of concern if the material within the cell processing equipment and piping is disturbed. During canyon cell area D&D activities, the potential for radiological doses to personnel and the environment is considered to be a significant risk. D&D activities include process cell equipment dismantling (cutting process piping). Even though personal protective equipment will be worn, external radionuclides exposure and inhalation still will pose a risk. During initial D&D activities, the potential for a radionuclide release will increase. As the inventory is stabilized and disposed appropriately, the source term (hence, the risk) will decrease.

The current 224-B Facility contaminant release threat is relatively low. In general, an accidental radiological (e.g., from a structural failure resulting from fire or seismic event) release increases the longer the facility remains in the S&M Program awaiting disposition. The risk from the 224-B Facility will increase with time because of the potential for inventory releases from structure degradation and the lack of a robust ventilation system. The external radiation, inhalation, and ingestion risks associated with the contamination under a continued S&M scenario justify a non-time-critical removal action.

This page intentionally left blank.

### 3.0 REMOVAL ACTION OBJECTIVES

The primary purpose of this EE/CA is to analyze removal action alternatives to address the risks at the 224-B Facility and determine the most appropriate removal action alternative for the 224-B Facility. Removal actions will be performed in a manner that is protective of human health and the environment. The principal threats to be addressed are radioactive hazardous substances associated with the 224-B Facility and contaminated surfaces.

Based on the potential hazards identified in Sections 2.3 and 2.4, the specific removal action objectives are as follows:

- Reduce or eliminate the potential for exposure to hazardous substances above levels that are protective of the public and environment
- Reduce or eliminate the potential for a release of hazardous substances
- Safely manage (treat and/or dispose) waste streams generated by the removal action
- To the extent practicable, contribute to the efficient performance of any anticipated long-term remedial action with respect to the release concerns and ensure an orderly transition from removal to remedial response actions, including any future subsurface soil remediation.

This page intentionally left blank.

#### 4.0 DISCUSSION OF ALTERNATIVES

The removal action alternative for the 224-B Facility must be protective of human health and the environment, and otherwise meet the removal action objectives. Based on these considerations, the following four removal action alternatives were identified:

- Alternative One: No Action
- Alternative Two: Continued S&M
- Alternative Three: D&D (to grade, excluding building foundation and underlying soils/structures)
- Alternative Four: D&D (including building foundation and underlying soils/structures to 1 meter below foundation). NOTE: The foundation includes the footings of the structure.

With the exception of the No Action alternative, each of the alternatives would result in generation of waste. The majority of the contaminated debris likely would be designated as low-level waste (LLW); however, quantities of mixed waste, dangerous waste, and TRU waste might be generated. Waste management applicable or relevant and appropriate requirements (ARARs) are discussed in Section 5.1.2.1.

Waste generated under removal action Alternatives Two, Three, and Four would be disposed at an appropriate disposal site. Waste management would be a common element among these alternatives. For each alternative, recycling and/or reuse options would be evaluated and possibly implemented to reduce the volume of material disposed.

Contaminated waste for which no reuse, recycle, or decontamination option is identified would be assigned an appropriate waste designation (e.g., solid, asbestos, PCB, radioactive, dangerous, or mixed). Most of the contaminated waste generated during implementation of these alternatives would be disposed onsite at the Environmental Restoration Disposal Facility (ERDF) in the 200 West Area. ERDF would be the preferred waste disposal option because ERDF is an engineered facility that provides a high degree of protection to human health and the environment, and it is more cost effective than disposal at other disposal sites. Construction and operation of ERDF was authorized using a separate CERCLA ROD (EPA et al. 1995). ERDF is an engineered structure designed to meet RCRA minimum technological requirements for landfills, including standards for a double liner, a leachate collection system, leak detection, monitoring, and final cover.

The U.S. Department of Energy Hanford Environmental Restoration Disposal Facility, Hanford Site, Benton County, Washington, *Explanation of Significant Differences* (ESD) (EPA et al. 1996) modified the ERDF ROD (EPA et al. 1995 and EPA et al. 2002) to clarify the eligibility of waste generated during cleanup of the Hanford Site. Per the ESD, ERDF is eligible for disposal of any LLW, mixed waste, and hazardous/dangerous waste generated as a result of CERCLA or RCRA cleanup actions (e.g., D&D waste, RCRA past-practice waste, and investigation-derived waste), provided that the waste meets ERDF waste acceptance criteria and that appropriate CERCLA decision documents are in place.

The waste generated during the selected CERCLA removal action would fall within the definition of waste eligible for disposal at ERDF established in the ERDF ROD and subsequent ESD. Waste might

require treatment to meet ERDF waste acceptance criteria. The type of treatment and the location of treatment would be determined on a case-by-case basis. Solidification, encapsulation, neutralization, and size reduction/compaction could be employed to treat various waste types. For waste requiring treatment, the techniques would be documented in a treatment plan.

Several mixed waste streams already have been reviewed and approved for treatment and disposal at ERDF. These mixed waste streams are as follows.

- Radioactively contaminated elemental mercury could be amalgamated.
- Radioactively contaminated elemental lead could be macroencapsulated at ERDF.
- Aqueous solutions could be treated (solidified) in accordance with the approved waste treatment plan and sent to ERDF.

While most waste generated during the removal action likely would meet ERDF waste acceptance criteria, some waste might not meet or might not be able to be treated to meet ERDF acceptance criteria. Specifically, this would include low-level radioactive and nonradioactive liquid waste and TRU waste that could be encountered or generated during the removal action.

Liquid waste containing levels of radioactive and/or nonradioactive hazardous substances meeting the 200 Areas Effluent Treatment Facility (ETF) waste acceptance criteria would be transferred to ETF and treated to meet ETF waste discharge criteria. Liquids that do not meet ETF waste acceptance criteria would be solidified and either disposed at ERDF (if ERDF waste acceptance criteria are met) or stored at the Central Waste Complex (CWC). Clean water (e.g., nonradioactive and nonhazardous) could be used for dust suppression.

TRU waste would be placed in interim storage at CWC and shipped to the Waste Isolation Pilot Plant (WIPP) in accordance with the schedule established for completing remedial actions on the Hanford Site.

The 224-B Facility and ERDF are considered to be onsite for management and/or disposal of waste from removal actions proposed in this document<sup>1</sup>. There is no requirement to obtain a permit to manage or dispose of CERCLA waste at the ERDF. It is expected that the great majority of the waste generated during the removal action proposed in this document can be disposed onsite. For waste that must be sent offsite, such as TRU waste, EPA would make a determination in accordance with 40 CFR 300.440 as to the acceptability of the proposed disposal site for receiving this CERCLA removal action waste if necessary.

---

<sup>1</sup> CERCLA Section 104(d)(4) states that, where two or more noncontiguous facilities are reasonably related on the basis of geography, or on the basis of the threat or potential threat to the public health or welfare or the environment, the President may, at his discretion, treat these facilities as one for the purpose of this section. The preamble to the "National Oil and Hazardous Substances Pollution Contingency Plan" (40 CFR 300) clarifies the stated EPA interpretation that when noncontiguous facilities are reasonably close to one another, and wastes at these sites are compatible for a selected treatment or disposal approach, CERCLA Section 104(d)(4) allows the lead agency to treat these related facilities as one site for response purposes and, therefore, allows the lead agency to manage waste transferred between such noncontiguous facilities without having to obtain a permit. Therefore, the ERDF is considered to be onsite for response purposes under this removal action. It should be noted that the scope of work covered in this removal action is for a facility and waste contaminated with hazardous substances. Materials encountered during implementation of the selected removal action that are not contaminated with hazardous substances will be dispositioned by DOE.

## 4.1 ALTERNATIVE ONE: NO ACTION

Under the No Action alternative, access to the 224-B Facility would not be restricted. The No Action alternative would not address the hazards posed by the 224-B Facility. The 224-B Facility would continue to deteriorate. Initial risks of the No Action alternative would be minimal to the environment. Barring an unusual event, contaminants would be expected to remain confined within the 224-B Facility for the near term. Industrial and radiological hazards would exist under the No Action alternative because controls to prevent access would not be maintained. Risks over time could be expected to increase as deterioration of the 224-B Facility progresses and the structural integrity systems are compromised. Eventually, decay is expected to result in radiological releases to the environment and potential exposure to personnel and the public. Physical hazards associated with partial structural collapse also would be anticipated.

### 4.1.1 Cost Estimates for Alternative One: No Action

The near-term costs for implementing this alternative would be negligible as no cost would be expended on security, radiological surveys, maintenance activities, etc.

## 4.2 ALTERNATIVE TWO: CONTINUED S&M

Alternative Two would ensure that the 224-B Facility is sustained in a safe condition until final disposition of the B Plant Complex and its ancillary buildings. Currently, D&D of the B Plant Complex is shown in the long-range plan (DOE/RL-96-105) to occur between 2017 and 2043. For this alternative, it is assumed that S&M of the 224-B Facility and B Plant Complex canyon building (the 221-B Facility) would continue until 2030. This date was chosen as the halfway point within the range of the long-range plan of 2017 and 2043 for facility decommissioning.

Under this alternative, the 224-B Facility would remain in the S&M program until decommissioning occurs. The 224-B Facility would be maintained in a quiescent state for a considerable duration while ongoing preventive measures are implemented. These measures would include periodic radiological and industrial hazard monitoring (both inside and outside of the 224-B Facility), cold weather protection, preventive maintenance, annual roof inspections, identification and minor repair of friable asbestos, and general visual inspections. Major maintenance operations, such as roof maintenance, would be performed to ensure the maintenance of safe conditions and the control of the ongoing deterioration process. Additionally, limited decontamination and fixative application would occur to control the spread of radiological contamination.

The prime goal of this alternative is to prevent radiological environmental releases and to avoid industrial accidents. Adoption of the S&M alternative extends the life of the 224-B Facility for approximately the next 30 years, during which time deterioration progresses and unusual events (e.g., seismic) might occur. Severe weather conditions could create conditions amenable to radiological releases, and long-term aging of confinement structures could lead to eventual failure. These conditions, accompanied by minimum surveillance efforts, could result in an unplanned radiological release.

Because minimal surveillance readily would not detect 224-B Facility decay (e.g., system corrosion or structural breakdown), preventive maintenance might not occur in time, and response actions could be required. This approach could result in the spread of contamination. An ongoing S&M program would have to become increasingly more labor intensive and incorporate periodic characterization efforts to

counter these conditions. Such conditions ultimately would lead to increased risk of exposure of radioactive material and contamination to personnel and the environment.

In this alternative, the magnitude of a continued S&M program would be controlled to conserve funding and be responsive to safety issues. Growth of the program was included to account for progressive 224-B Facility deterioration. Data evaluation, inspection/observations, and future 224-B Facility plans were factored into the continued S&M planning and implementation.

#### **4.2.1 Cost Estimates for Alternative Two: Continued S&M**

The detailed cost estimates for Alternative Two are shown in Table 4-1, along with a projection of costs over the S&M period for roof replacement and maintenance. The present-worth (discounted) cost for Alternative Two is approximately \$1,220,000. The total nondiscounted cost for Alternative Two is approximately \$1,670,000. Present-worth costs are used for evaluation of alternatives in the CERCLA process. Actual costs could vary. The total nondiscounted costs are presented for information and comparison purposes only.

Consistent with guidance established by the U.S. Office of Management and Budget (OMB), present-worth analysis is used as the basis for comparing costs of cleanup alternatives under the CERCLA program (OMB 1992). For purposes of this evaluation, present-worth (discounted) cost values were calculated using a discount rate of 3.2% (Marske 2003, OMB 1992).

S&M cleanup actions often incur costs at different times. For example, construction costs (e.g., roof replacement) could be followed by periodic costs in subsequent years or decades to maintain the effectiveness of the remedy. Because of the time-dependent value of money, future expenditures were not considered directly equivalent to current expenditures. The present-worth cost method shows the amount of money required at the initial point in time (e.g., in the current year) to fund all cleanup activities occurring over the life of the alternative. Present-worth analysis assumes that the funding set aside at the initial point in time increases in value as time goes on, similar to how money placed in a savings account gains in value as a result of interest paid on the account. Although the federal government typically does not set aside the money in this manner, the present-worth analysis is specified under CERCLA as the approach for establishing a common baseline to evaluate and compare alternatives that have costs occurring at different times. While the money actually might not be set aside, the present-worth costs were considered directly comparable for the purpose of evaluating alternative costs.

In contrast with the present-worth costs, the total nondiscounted costs do not take into account the value of money over time. The nondiscounted cost method displays the total costs occurring over the entire duration of an alternative, with no adjustment (or discounting) to reflect current year or set aside cost based on an assumed interest rate. Because nondiscounted costs do not reflect the changing value of funds over time, presentation of this information under CERCLA is for information purposes only, not for remedy selection purposes.

Table 4-1. Cost Estimate for Alternative Two: Continued S&amp;M.

Item	Estimated cost (\$1,000)
S&M	1,370
Roof replacement	140
Roof maintenance	160
<b>Nondiscounted Grand Total</b>	<b>1,670</b>
<b>Present-Worth (Discounted)</b>	<b>1,220</b>

Note: Details on the removal alternative estimates are discussed in Marske (2003).

#### 4.3 ALTERNATIVE THREE: D&D (TO GRADE, EXCLUDING BUILDING FOUNDATION AND UNDERLYING SOILS/STRUCTURES)

This alternative consists of removing the nonradiological and radiological hazardous substances from the 224-B Facility, removing equipment and associated piping, decontaminating the structure and/or stabilizing the contamination, demolishing the structure to slab, disposing of the waste generated, and stabilizing the area.

Nonradiological hazardous substances, primarily on the gallery side of the 224-B Facility, would be removed. These would include asbestos-containing material (ACM), the chemical feed tanks and piping, equipment oil, mercury, control panels, and potentially materials/liquids in the floor drains. Radiological hazardous substances removal would include removal of the loadout hood on the west end of the first floor (F cell) and all of the canyon cell tanks and piping. Because most of the radioactive inventory exists within the process cell equipment and piping, the process cell equipment and piping would be removed completely and disposed as appropriate, either before or as part of the 224-B Facility demolition. Equipment, vessels, and piping might need to be cut to facilitate removal and/or disposal. Remote handling equipment and an upgraded canyon bridge crane could be used to facilitate removal of cell equipment and piping. The door on the south side on the second floor, adjacent to E cell, could be used during D&D for material removal.

In general, piping and vessels would be removed, either before or as part of 224-B Facility demolition. Piping and drains entering or exiting the 224-B Facility belowgrade would be plugged or grouted to prevent potential pathways to the environment.

The majority of the demolition would require the use of heavy equipment (e.g., excavator with various attachments) to demolish the structure. Other industry standard practices for demolition also could be used (e.g., mechanical saws, cutting torches). The 224-B Facility would be demolished to grade, with only a slab remaining. Areas such as the pipe tunnel area in C cell that exist belowgrade would be filled with grout, gravel, or other suitable material to grade level and the entire footprint of the 224-B Facility stabilized to prevent migration of any residual contamination to the environment.

The scope of this removal action does not include soil, groundwater, or waste site remediation. Further soil or waste site remediation would be conducted in coordination with future remedial actions as described in Section 1.3.

The major risk associated with this alternative is the safety of personnel and the environment involved in both the radiological aspects of the process system removal and decontamination and the industrial aspects of facility demolition/dismantlement. These risks are related to the potential release of

contamination during operations and the hazards associated with D&D activities. Proven dust suppression techniques will be used. Risks associated with credible natural phenomenon events (e.g., seismic actions and high-velocity wind) would continue to exist until the radioactive material inventory is removed. These risks would diminish as the 224-B Facility removal activities progress and the radiological inventory is removed.

The disposal of the radioactive material inventory in the 224-B Facility and the immediate removal of the 224-B Facility and systems are the most direct resolution of impending radiological and physical hazards. By backfilling over the belowgrade areas of the 224-B Facility and stabilizing the slab, the mobility of residual contaminants to the environment in and under the foundation would be reduced. In time, however, contaminants could still pose a risk, most likely through the groundwater transport exposure pathway. Therefore, a remedial action might be required as part of a later D&D activity such as CDI or as part of remedial actions associated with adjacent contaminated waste sites. While concerns for operational methods and technology used would be encountered and resolved during removal actions, no major issues exist that might compromise this alternative.

#### 4.3.1 Cost Estimates For Alternative Three

Costs are presented in terms of total nondiscounted costs and present-worth (discounted) costs. The present-worth (discounted) cost for Alternative Three is approximately \$16,490,000. The total nondiscounted cost (approximately \$16,750,000) is a summation of the D&D costs for the duration of the project and reflects potential long-term costs that have not been discounted to reflect cost in 2003 dollars (present worth). As explained in more detail in Section 4.2.1, present-worth analysis is a standard methodology endorsed by the OMB that allows for a cost comparison of different remedial alternatives where costs are incurred in different time periods, on the basis of a single cost figure for each alternative (OMB 1992). Actual costs could vary. This single figure, or present worth (presented in Table 4-2), is the amount needed to be set aside at the start of the removal action to ensure that funds will be available in the future as needed. Present-worth (discounted) cost values were calculated using a discount rate of 3.2% (Marske 2003, OMB 1992).

Table 4-2. Cost Estimate for Alternative Three: D&D (To Grade, Excluding Building Foundation and Underlying Soils/Structures).

Item	Estimated cost (\$1,000)
Project planning and equipment procurement	9,100
Site mobilization and facility upgrades	260
Facility/waste characterization	2,670
Facility demolition	2,990
Waste disposal	
LLW	525
TRU waste	755
Project closeout/demobilization	230
Post D&D Surveillance and Maintenance	220
<b>Nondiscounted Grand Total</b>	<b>16,750</b>
<b>Present-Worth (Discounted)</b>	<b>16,490</b>

Note: Details on the removal alternative estimates are discussed in Marske (2003).

#### **4.4 ALTERNATIVE FOUR: D&D (INCLUDING BUILDING FOUNDATION AND UNDERLYING SOILS/STRUCTURES TO 1 METER BELOW FOUNDATION)**

This alternative consists of the scope of Alternative Three (Section 4.3) plus the demolition and removal of the building foundation to a depth of 1 meter below the foundation and footings. In this alternative, potentially contaminated facility foundation, piping, drains, and surrounding soil would be removed to 1 meter below the foundation and 1 meter out from the building footprint. The resulting void space would be backfilled with clean soil or other acceptable media.

The demolition would use heavy equipment (e.g., excavator with various attachments) to demolish the structure. Other industry standard practices for demolition also could be used (e.g., mechanical saws). Removal would include the 224-B Facility abovegrade structure and subsurface structure and systems to a depth of 1 meter below the foundation.

Underground piping and trenches extending away from the 224-B Facility are only included in the scope to a distance of 1 meter from the walls of the structure, although additional piping or trenches might be removed and disposed, as necessary, to accommodate the removal action for the structure. Contaminated and uncontaminated soil to a distance of 1 meter from the walls and floors of the structure might be moved or removed as necessary to implement the removal of the structures; however, the scope of this removal action does not include any additional soil, groundwater, or waste site remediation.

The major risk associated with this alternative is the safety of personnel involved in both the radiological aspects of the process system removal and decontamination and the industrial aspects of facility demolition and dismantlement, which includes soil excavation. These risks are related to the potential release of contamination during operations and the hazards associated with construction activities. Proven dust suppression techniques will be used. Risks associated with credible natural phenomenon events (e.g., seismic actions and high-velocity wind) would continue to exist until the radioactive material inventory was removed. These risks would diminish as the 224-B Facility removal progresses and the radioactive inventory was removed.

The disposal of the radioactive material inventory in the 224-B Facility and the immediate removal of the facility and its systems would be the most direct resolution to impending radiological and physical hazards. Because the foundation of the structure, as well as underlying and adjacent soils, would be removed to the extent described, this alternative would result in the removal of the greatest amount of contamination of the four removal action alternatives. In time, however, contaminants remaining in the soil, piping, or trenches could still pose a risk, most likely through the groundwater transport exposure pathway, and would need to be remediated as part of future remedial actions as described in Section 1.3. While concerns for operational methods and technology utilization would be encountered and resolved during removal actions, no major issues exist that might compromise this alternative.

##### **4.4.1 Cost Estimates For Alternative Four**

Costs are presented in terms of total nondiscounted costs and present-worth (discounted) costs. The present-worth cost for Alternative Four is approximately \$18,330,000. The total nondiscounted cost (approximately \$18,850,000) is a summation of the D&D costs for the duration of the project and reflects potential long-term costs that have not been discounted to reflect cost in 2003 dollars (present worth). As explained in more detail in Section 4.2.1, present-worth analysis is a standard methodology endorsed by the OMB that allows for a cost comparison of different remedial alternatives where costs are incurred in

different time periods, on the basis of a single cost figure for each alternative (OMB 1992). Actual costs could vary. This single figure, or present worth (presented in Table 4-3), is the amount needed to be set aside at the start of the removal action to ensure that funds would be available in the future as funds are needed. Present-worth (discounted) cost values were calculated using a discount rate of 3.2% (Marske 2003, OMB 1992).

Table 4-3. Cost Estimate for Alternative Four: D&D (Including Building Foundation and Underlying Soils/Structures to 1 Meter Below Foundation).

Item	Estimated cost (\$1,000)
Project planning and equipment procurement	9,600
Site mobilization and facility upgrades	260
Facility/waste characterization	2,780
Facility demolition	2,990
Belowgrade removal (1 meter below foundation)	1,060
Waste disposal	
LLW	955
TRU waste	755
Project closeout/demobilization	230
Post D&D surveillance and maintenance	220
<b>Nondiscounted Grand Total</b>	<b>18,850</b>
<b>Present-Worth (Discounted)</b>	<b>18,330</b>

Note: Details on the removal alternative estimates are discussed in Marske (2003).

---

## 5.0 ANALYSIS OF ALTERNATIVES

Non-time-critical removal action alternatives are evaluated against three criteria: effectiveness, implementability, and cost. To provide a more comprehensive evaluation, the criterion of effectiveness is divided into subcriteria that are consistent with the requirements for CERCLA actions. The removal action alternatives are evaluated against the following criteria:

- Effectiveness
  - Overall protection of human health and the environment
  - Compliance with applicable federal and state laws and regulations (i.e., ARARs)
  - Long-term effectiveness and permanence
  - Reduction of toxicity, mobility, or volume through treatment
  - Short-term effectiveness
- Implementability
- Cost.

State and public acceptance will be evaluated after individuals have an opportunity to review and comment on this EE/CA. Each criterion is explained briefly in the following subsections; a detailed analysis of each alternative relative to each criterion follows. Finally, the alternatives are compared against one another relative to each criterion. The alternatives are as follows:

- Alternative One: No Action
- Alternative Two: Continued S&M
- Alternative Three: D&D (to grade, excluding building foundation and underlying soils/structures)
- Alternative Four: D&D (including building foundation and underlying soils/structures to 1 meter below foundation).

### 5.1 EFFECTIVENESS

#### 5.1.1 Overall Protection of Human Health and the Environment

This criterion evaluates whether the alternative achieves adequate overall elimination, reduction, or control of risks to human health and the environment posed by the likely exposure pathways. This criterion draws on the assessment of the other evaluation criteria identified previously. Reducing the potential threat to acceptable levels is a threshold requirement and is the primary objective of the removal action. The evaluation of this criterion was based on qualitative analysis and assumptions regarding the radioactive inventory.

Alternative One does not provide overall protection to human health and the environment. As the 224-B Facility deteriorates over time with no ongoing maintenance, contamination could be released to the environment. The radioactive inventory, including alpha-emitting radionuclides, potentially could expose the public and environment to an unacceptable radiation dose.

Because Alternative One does not meet the threshold requirement of meeting overall protection of human health and the environment, especially in the long term, this alternative was not analyzed further. For the remainder of this EE/CA, when all the alternatives are mentioned, this represents Alternatives Two, Three, and Four.

Alternative Two provides adequate overall protection of human health and the environment, although the maintenance effort and funding required for maintaining this protection would increase over time. The structure and roof of the 224-B Facility would require significant modification, repair, and replacement to maintain contamination and radioactive inventory confinement within the structure during the period of S&M. Additionally, Alternative Two would not remove the radioactive inventory within the facility. Therefore, relative to the other alternatives, Alternative Two does not perform as well under this criterion.

Alternatives Three and Four would remove existing loose contamination and the majority of the radioactive inventory present at the 224-B Facility site. This would reduce or eliminate release pathways to the environment and meet the removal action objectives. The risk associated with residual subsurface contamination that might be present would be minimized through interim surface stabilization.

Alternative Four would remove more inventory than Alternative Three because Alternative Four would remove the entire foundation and up to 1 meter of soil below the foundation. Alternative Four, however, does not include remediation of the subsurface, which would have to be backfilled while awaiting future remediation, similar to Alternative Three. Under Alternative Three, the stabilized foundation slab would remain in place, effectively isolating any subsurface contamination while awaiting future remediation.

### **5.1.2 Compliance with Applicable or Relevant and Appropriate Requirements**

This criterion addresses whether a removal action would, to the extent practicable, meet ARARs. ARARs are defined to mean only substantive requirements. ARARs do not include administrative requirements. Furthermore, onsite CERCLA actions are exempt from obtaining federal, state, and local permits [40 CFR 300.400(e)].

To-be-considered (TBC) information is nonpromulgated advisories or guidance issued by federal or state governments that are not legally binding and do not have the status of ARARs. As appropriate, TBCs should be referenced with ARARs in determining the removal action necessary for protection of human health and the environment. Because the activities would result primarily in waste generation and potential for air emissions, the key ARARs proposed for the alternatives being considered include waste management standards, standards controlling emissions to the environment, and environment, safety, and health standards. Final ARARs, which must be complied with during implementation of the selected removal action, would be documented in the CERCLA AM. The proposed ARARs are discussed generally in the following sections and are documented in detail in Table 5-1.

#### **5.1.2.1 Waste Management Standards**

A variety of waste streams would be generated under the proposed removal action alternatives. It is anticipated that most of the waste would be designated as LLW. However, quantities of TRU waste, dangerous or mixed waste, PCB-contaminated waste, and asbestos and ACM also could be generated. The great majority of the waste would be in a solid form. However, some aqueous solutions might be generated.

Radioactive waste is governed under the authority of the *Atomic Energy Act of 1954*. Standards for management and storage of TRU waste are in 40 CFR 191.3.

The identification, storage, treatment, and disposal of hazardous waste and the hazardous component of mixed waste are governed by RCRA. Authority to implement most of the RCRA was delegated to the State of Washington, which implements RCRA requirements under *Washington Administrative Code* (WAC) 173-303. The dangerous waste standards for generation and storage would apply to the management of any dangerous or mixed waste generated at the 224-B Facility. Treatment standards for dangerous or mixed waste subject to RCRA land disposal restrictions are specified in WAC 173-303-140, which incorporates 40 CFR 268 by reference.

The management and disposal of PCB wastes are governed by the *Toxic Substances Control Act (TSCA) of 1976*, which is implemented by 40 CFR 761. The TSCA regulations contain specific provisions for PCB waste, including PCB waste that contains a radioactive component. PCBs also are considered underlying hazardous constituents under RCRA and thus could be subject to WAC 173-303 and 40 CFR 268 requirements.

Removal and disposal of asbestos and ACM are regulated under the *Clean Air Act* (40 CFR 61, Subpart M) and Occupational Safety and Health Administration regulations (29 CFR 1910.1101 and WAC 296-62). These regulations provide for special precautions to prevent environmental releases or exposure to personnel of airborne emissions of asbestos fibers during removal actions. 40 CFR 61.52 identifies packaging requirements.

Waste that is designated as LLW that meets ERDF acceptance criteria would be disposed at ERDF, which is engineered to meet appropriate performance standards under 10 CFR 61. Waste that is designated as either contact-handled or remote-handled TRU waste or TRU mixed waste would be stored at CWC and would be shipped to WIPP in accordance with the schedule established for completing remedial actions on the Hanford Site. WIPP meets 40 CFR 191 requirements for TRU waste disposal and is a RCRA-permitted disposal facility.

Waste designated as dangerous or mixed waste would be treated as appropriate to meet land disposal restrictions and ERDF acceptance criteria, and disposed at ERDF. ERDF is engineered to meet landfill design standards under WAC 173-303-665. All applicable packaging and pre-transportation requirements for dangerous or mixed waste generated at the 224-B Facility would be identified and implemented before movement of any waste.

Some of the aqueous waste designated as LLW, dangerous, or mixed waste would be transported to ETF for treatment and disposal. ETF is a RCRA-permitted facility authorized to treat aqueous waste streams generated on the Hanford Site and dispose of these streams at a designated state-approved land disposal facility in accordance with all applicable requirements.

Waste designated as PCB remediation waste likely would be disposed at ERDF or WIPP, depending on whether the waste is a LLW or a TRU waste respectively. ERDF is authorized to accept solid PCB waste containing PCB concentrations up to 500 ppm for disposal. All waste suspected to contain PCBs would be evaluated to determine whether the waste meets ERDF or WIPP waste acceptance criteria. Any PCB waste that does not meet ERDF or WIPP waste acceptance criteria would be retained at an onsite PCB storage area meeting the substantive requirements for TSCA storage, and would be transported for future disposal at an appropriate disposal facility.

Asbestos and ACM would be removed, packaged as appropriate, and disposed in ERDF.

CERCLA Section 104(d)(4) states that where two or more noncontiguous facilities are reasonably related on the basis of geography, or threat or potential threat, the facilities could be treated as one for purposes of CERCLA response actions. Consistent with this, the 224-B Facility and ERDF would be considered to

be onsite for purposes of this removal action, and waste would be transferred between the facilities without requiring a permit.

It is anticipated that all alternatives would be performed in compliance with all waste management ARARs. All waste streams would be evaluated, designated, and managed in compliance with the appropriate requirements. Before disposal, waste would be managed in a protective manner to prevent releases to the environment or unnecessary exposure to personnel.

#### **5.1.2.2 Standards Controlling Emissions to the Environment**

The proposed removal action would have the potential to generate airborne emissions of both radioactive and nonradioactive emissions.

The federal *Clean Air Act* and the "Washington Clean Air Act" (*Revised Code of Washington* [RCW] Chapters 70.94 and 43.21) regulate both toxic and radioactive airborne emissions. Under implementing regulations found in 40 CFR 61, Subpart H, and WAC 246-247, radionuclide airborne emissions from all combined operations on the Hanford Site may not exceed 10 mrem/yr effective dose equivalent to the hypothetical offsite maximally exposed individual. The WAC 246-247 also requires verification of compliance, typically through periodic confirmatory air sampling. Any potential for a nonzero radioactive emission requires use of best available radionuclide control technology (BARCT) or as low as reasonably achievable control technology (ALARACT). The potential to emit would be calculated before starting the removal action, and a monitoring plan would be developed and implemented as appropriate.

WAC 173-400 and 173-460 establish requirements for emissions of nonradionuclide air pollutants. The primary source of nonradionuclide emissions would be fugitive dust, which would be regulated under WAC 173-400-040(3). Fugitive emissions would be controlled through standard industrial practices such as application of water spray and fixatives and temporary confinement enclosures/glovebag containments. Alternatives Two through Four would be expected to comply with these standards.

#### **5.1.2.3 Safety and Health Standards**

The DOE requirements for personnel protection from radiation hazards are specified in "Occupational Radiation Protection" (10 CFR 835). This regulation establishes radiation protection standards, limits, and program requirements for protecting personnel from ionizing radiation. The regulation also requires that measures be taken to maintain radiation exposures as low as reasonably achievable.

Under Alternatives Two through Four, radiological and physical hazards would be identified and analyzed before the start of activities. Appropriate mitigation measures would be addressed in a site-specific health and safety plan. All alternatives would be expected to comply with these standards. A combination of personal protective equipment, personnel training, and administrative controls (e.g., limiting time in and distance from radiation zones) would be used to ensure that the requirements for personnel and visitor protection are met. Individual monitoring would be performed as necessary to verify compliance with the requirements. Because Alternative Two would extend over a longer time but would involve a lower potential for incidences to occur in the near term, it is uncertain whether Alternative Two would perform better or worse than the other alternatives.

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
<b>5.1.2.1 WASTE MANAGEMENT STANDARDS</b>			
Regulations pursuant to the RCRA, 42 <i>United States Code</i> (USC) 6901, et seq. -- Implemented through the <i>Hazardous Waste Management Act</i> , RCW 70.105			
<i>Dangerous Waste Regulations</i> , (WAC 173-303):			
Solid Waste Identification  Specific subsections: WAC 173-303-016 WAC 173-303-017	ARAR	These regulations define how to identify when materials are and are not solid waste	These regulations are applicable because these define how to determine which materials are subject to the designation regulations.
Incorporation of EPA Regulations By Reference  Specific subsection: WAC 173-303-045	ARAR	This regulation clarifies that reference in WAC 173-303 or 40 CFR Parts 260 through 280 and Part 124 refer to those rules as these existed on July 1, 1999. It also clarifies which portions of the regulations are not incorporated or adopted by reference because these are provisions that EPA can not delegate to states.	This regulation clarifies how reference to federal RCRA regulations is implemented.
Dangerous/Mixed Waste Designation  Specific subsections: WAC 173-303-070 WAC 173-303-071 WAC 173-303-080 WAC 713-303-081 WAC 173-303-082 WAC 173-303-083 WAC 173-303-090 WAC 173-303-100 WAC 173-303-110	ARAR	These regulations define the procedures to be used to determine if solid waste requires management as dangerous waste. The regulations identify which waste codes are appropriate for application to the waste.	These regulations are applicable to solid waste that will be generated during removal action.
Dangerous/Mixed Waste Management  Specific subsections: WAC 173-303-073 WAC 173-303-077 WAC 173-303-170(3)	ARAR	These regulations establish the management standards for solid waste designated as dangerous or mixed waste. Special waste is addressed in WAC 173-303-073. Universal waste is addressed in WAC 173-303-077. Generator standards are addressed in -170 and -200.	These regulations are applicable to the management of materials subject to WAC 173-303. Specifically, the standards for management of special waste and universal waste and the standards for management of dangerous/mixed waste are applicable to the interim management of certain waste that will be generated during the removal action. WAC 173-303-170(3) includes the provisions of WAC 173-303-200 by reference. WAC 173-303-200 further includes certain standards from WAC 173-303-630 and -640 by reference.

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
Dangerous/Mixed Waste Disposal  Specific subsections: WAC 173-303-140	ARAR	This regulation establishes state standards for land disposal of dangerous waste and incorporates by reference federal land disposal restrictions of 40 CFR 268 that are applicable to solid waste that designates as dangerous or mixed waste in accordance with WAC 173-303-070.	This regulation is applicable to dangerous/mixed waste generated from the removal action that will be destined for land disposal.
Recycling Requirements  Specific subsections: WAC 173-303-120(3) WAC 173-303-120(5)	ARAR	These regulations define the requirements for the recycling of materials that are solid and a dangerous waste. Specifically, WAC 173-303-120(3) provides for management of certain recyclable materials, including spent refrigerants, antifreeze, and lead-acid batteries. WAC 173-303-120(5) provides for the recycling of used oil.	These regulations provide for the management of materials, such as antifreeze and used oil, that will be generated during removal action. Such materials can be recycled and/or conditionally excluded from certain dangerous waste requirements.
Regulations pursuant to the <i>Atomic Energy Act of 1954</i> , 42 USC 2011, et seq			
<i>Environmental Radiation Protection Standards for the Management and Disposal of Spent Nuclear Fuel, High-Level and Transuranic Radioactive Waste</i> (40 CFR 191)			
TRU Waste Storage Standards  Specific subsection: 40 CFR 191.3	ARAR	This regulation establishes the standard for management of spent nuclear fuel, high level, or TRU waste at any facility operated by the Nuclear Regulatory Commission or by Agreement States and for management at disposal facilities operated by the DOE.	This requirement is potentially relevant and appropriate to TRU waste during onsite storage.

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
Regulations pursuant to the <i>Toxic Substances Control Act (TSCA)</i> , 15 USC 2601 et seq.			
<i>Polychlorinated Biphenyls Manufacturing, Processing, Distribution in Commerce, and Use Provisions (40 CFR 761)</i>			
PCB Waste Management and Disposal  Specific subsections: 40 CFR 761.50(b)(1) 40 CFR 761.50(b)(2) 40 CFR 761.50(b)(3) 40 CFR 761.50(b)(4) 40 CFR 761.50(b)(7) 40 CFR 761.50(c)	ARAR		These regulations are applicable to the storage and disposal of PCB liquids, items, remediation waste, and bulk product waste at >50 ppm. The specific identified subsections from 40 CFR 761.50(b) reference the specific sections for management of each PCB waste type.  Radioactive PCB waste can be disposed in accordance with 40 CFR 761.50(b)(7).
Regulations pursuant to the <i>Solid Waste Management, Recovery and Recycling Act</i> , RCW 70.95			
<i>"Minimum Functional Standards for Solid Waste Handling," (WAC 173-304)</i>			
Nondangerous, Nonradioactive Solid Waste Management  Specific subsections: WAC 173-304-190 WAC 173-304-200 WAC 173-304-350	ARAR	These regulations establish requirements for the management of solid waste that is not dangerous or radioactive waste. Affected solid waste includes garbage, industrial waste, construction waste, and ashes. Requirements for containerized storage, collection, transportation, treatment, and disposal of solid waste are included.	These regulations are applicable to onsite management and disposal of nondangerous, nonradioactive solid waste that could be generated during removal action.
To-Be-Considered pursuant to relevant facility acceptance criteria			
<i>Environmental Restoration Disposal Facility Waste Acceptance Criteria (BHI-00139)</i>	TBC	This document establishes waste acceptance criteria for ERDF.	Waste destined for management at ERDF must meet acceptance criteria to ensure proper disposal.

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
<b>5.1.2.2 STANDARDS CONTROLLING EMISSIONS TO THE ENVIRONMENT</b>			
Regulations pursuant to the <i>Clean Air Act of 1977</i> , 42 USC 7401, et seq.			
<i>"National Emission Standards for Hazardous Air Pollutants"</i> (40 CFR 61)			
Emissions of Hazardous Air Pollutants  Specific subsections: 40 CFR 61.01 40 CFR 61.05 40 CFR 61.12 40 CFR 61.14  40 CFR 61.92  40 CFR 61.145(a)(1) 40 CFR 61.145(a)(5) 40 CFR 61.145(c) 40 CFR 61.150(a) 40 CFR 61.150(b) 40 CFR 61.150(c)	ARAR	<p>These regulations establish emission standards for hazardous air pollutants including radionuclides (except radon) and asbestos.</p> <p>These regulations provide general requirements and listings for regulated emissions at a regulated facility.</p> <p>40 CFR 61.92 sets limits for emissions of radionuclides from the entire facility to ambient air. Radionuclide emissions can not exceed those amounts that would cause any member of the public to receive an effective dose equivalent of 10 mrem/yr. The definition of facility includes all buildings, structures, and operations at one contiguous site. The requirements also set standards to ensure that emissions from asbestos are minimized during collection, processing, packaging, and transportation.</p> <p>These regulations define regulated asbestos-containing materials and establish removal requirements based on quantity present and handling requirements. These regulations also specify handling and disposal requirements for regulated sources having the potential to emit asbestos.</p>	<p>These regulations apply to the Hanford Site because there is potential to emit radionuclides to unrestricted areas. Radionuclide emissions from activities associated with the removal action must be controlled and monitored.</p>

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
Regulations pursuant to the <i>Washington Clean Air Act</i> , RCW 70.94 / <i>Department of Ecology</i> , RCW 43.21A			
<i>"Radiation Protection - Air Emissions,"</i> (WAC 246-247)			
Radionuclide Emission Standards  Specific subsections: WAC 246-247-120 WAC 246-247-130	ARAR	These regulations establish limits for airborne radionuclide emissions as defined in WAC 173-480 and 40 CFR 61, Subparts H and I. The ambient air standards under WAC 173-480 require that the most stringent standard be enforced. Ambient air standards under 40 CFR 61, Subparts H and I, are not to exceed amounts that result in an effective dose equivalent of 10 mrem/yr to any member of the public. These standards specify emission monitoring requirements and the application of BARCT requirements.	These regulations are applicable because these set emission limits and use of BARCT or ALARACT for airborne radionuclides.
<i>"General Regulations for Air Pollution,"</i> (WAC 173-400)			
Air Contaminant Emission Standards  Specific subsections: WAC 173-400-040 WAC 173-400-075	ARAR	These regulations require that reasonable precautions be taken to prevent the release of air contaminants associated with fugitive emissions resulting from materials handling, construction, demolition, or other operations. Emission standards are identified for visible, particulate, fugitive, odors, and hazardous air emissions.  The regulations require that source testing and monitoring be performed.	Requirements of these regulations are relevant and appropriate to removal actions performed at the site that could result in the emission of hazardous air pollutants (e.g., fugitive dust). Substantive standards established for the control and prevention of air pollution under these regulations might be applicable during the removal action.
<i>"Controls for New Sources of Air Pollution,"</i> (WAC 173-460)			
Controls for New Sources of Toxic Air Pollutants  Specific subsection: WAC 173-460-040	ARAR	This regulation requires that new sources of air emissions provide emission estimates for toxic air contaminants listed in the regulation. The standard requires that emissions be quantified and used in risk modeling to evaluate ambient impacts and establish acceptable source impact levels. The standard establishes three major requirements for new sources of air pollutants: use of best available control technology, quantification of toxic emissions, and demonstration that human health is protected.	This regulation is relevant and appropriate to removal actions performed at the site, if a treatment technology that emits toxic air emissions were necessary during the implementation of the removal action.

Table 5-1. Identification of Potential Applicable or Relevant and Appropriate Requirements and To Be Considered Information for the 224-B Facility.

Potential ARAR citation	Potential ARAR or TBC	Requirement	Rationale for use
<i>"Ambient Air Quality Standards and Emission Limits for Radionuclides,"</i> (WAC 173-480)			
Ambient Air Standards for Radionuclides  Specific subsections: WAC 173-480-040 WAC 173-480-050 WAC 173-480-060	ARAR	These requirements establish that the most stringent federal or state ambient air quality standard for radionuclides be enforced. The WAC 173-480 standard defines the maximum allowable level for radionuclides in the ambient air, which shall not cause a maximum accumulated dose equivalent of 25 mrem/yr to the whole body or 75 mrem/yr to any critical organ. However, ambient air standards under 40 CFR 61, Subparts H and I, are not to exceed amounts that result in an effective dose equivalent of 10 mrem/yr to any member of the public. Emission standards for new and modified emission units shall use BARCT.	Requirements of this standard are relevant and appropriate to removal actions performed at the site that could emit radionuclides to the air.
<b>5.1.2.3 SAFETY AND HEALTH STANDARDS</b>			
<i>Occupational Radiation Protection</i> (10 CFR 835)			
10 CFR 835	ARAR	This regulation establishes occupational dose limits for adults.	This regulation is applicable to the removal action.

### 5.1.3 Long-Term Effectiveness and Permanence

The long-term effectiveness and permanence criterion addresses the risk after the removal action is completed. This criterion also refers to the ability of the removal action to maintain long-term reliable protection of human health and the environment after remedial action objectives have been met.

In Alternative Two, S&M would be carried out until the eventual D&D of the 224-B Facility, which is planned to occur between 2017 and 2043. Therefore, the alternative would be effective at protecting human health during this time frame, although the efforts to maintain that level of protection necessarily would become increasingly aggressive as the facility ages. Because contamination would be left in place with this alternative, environment release risk would remain. The structure would be monitored closely. With time, the effectiveness of this alternative would diminish. This alternative would not provide a permanent solution with respect to the 224-B Facility, because D&D or inventory removal would need to occur at some future time.

Alternatives Three and Four would provide greater protection of human health and the environment compared to Alternative Two. These alternatives would provide a more permanent remedy for the purposes of meeting the removal action objectives. Both Alternatives Three and Four would remove the majority of contaminated inventory associated with the 224-B Facility. Further remedial actions potentially would be required for subsurface and surrounding contamination. Aboveground contamination and structures would be removed and disposed, thereby creating an effective and

permanent remedy for the structure. This would allow improved access to contamination surrounding the 224-B Facility for future remedial action. There would be no unacceptable risk attributable to the surface portions of the 224-B Facility after completion of the removal action under Alternatives Three and Four.

Alternative Four would result in removing the subsurface foundation and 1 meter of soil beneath the foundation, which potentially could provide additional long-term protection if significant radiological inventory actually is located in the foundation. However, Alternatives Three and Four are judged to be comparable in terms of long-term protectiveness because the foundation would be left in place under Alternative Three, thereby isolating any potential subsurface contamination. By placing the waste in ERDF, WIPP, or an offsite TSD facility, long-term protection to human health and the environment from contaminants in the 224-B Facility would be achieved.

#### **5.1.4 Reduction of Toxicity, Mobility, or Volume Through Treatment**

This criterion refers to an evaluation of the anticipated performance of the treatment technologies that might be employed in the removal action. This criterion assesses whether the alternative permanently and significantly reduces the hazard posed through application of a treatment technology. This could be accomplished by destroying the contaminants, reducing the quantity of contaminants, or irreversibly reducing the mobility of contaminants. Reduction of toxicity, mobility, and/or volume contributes toward overall protectiveness.

Based on process knowledge of past facility activities, it is anticipated that a maximum of 10% of the waste generated under Alternatives Two through Four would require treatment to meet ERDF, WIPP, or offsite TSD facility waste acceptance criteria. Treatment would not be a significant component of the removal action. However, because Alternatives Three and Four would generate substantially more waste than Alternative Two, these alternatives could be considered more effective at meeting this criterion. Most of the treatment methods anticipated (e.g., macroencapsulation) would act to reduce the mobility of contaminants. Some treatment methods (e.g., elementary neutralization) would reduce the toxicity of contaminants. Each alternative would evaluate recycling to reduce the volume of material disposed.

#### **5.1.5 Short-Term Effectiveness**

The short-term effectiveness criterion refers to any potential adverse effects on human health (e.g., personnel or surrounding public) and the environment during the removal action implementation phases. The criterion also refers to an evaluation of the speed with which the remedy achieves protection.

Under Alternative Two, there would be a potential for exposure to personnel and the environment during the S&M period because personnel would be required to enter the contaminated facility to perform work. This potential for exposure would become greater as the facility deteriorates and eventually could include potential exposure to the public as well as the environment. The speed with which full protection is achieved, however, would be lengthy since the final removal of contaminant inventory might not occur until between 2017-2043.

With regard to short-term risks to personnel and the environment during implementation, Alternatives Three and Four would increase potential exposure in relation to Alternative Two because personnel would be entering the contaminated facility and would be handling more contaminated materials. The handling of contaminated materials would increase the potential for a release to the environment, especially to the air, in the near term. Strict adherence to all appropriate environmental regulations would help ensure that

the potential for releases would be minimized. Alternative Two would present a lesser hazard but for a longer time.

## 5.2 IMPLEMENTABILITY

Implementability refers to the technical and administrative feasibility of a removal action, including the availability of materials and services needed to implement the selected solution.

From a technical standpoint, Alternative Two can be implemented easily, as demonstrated by success of the S&M program currently ongoing at the 224-B Facility. S&M techniques are widely used throughout the Hanford Site, and no specialized materials or services would be required except when major repairs are needed on the 224-B Facility. As time goes by, the primary implementation deterrent would be subjecting S&M personnel and the environment to increasing potential contamination exposure as facility deterioration increases. However, normal precautions for dealing with contamination would be applied.

Alternatives Three and Four also can be implemented with relative ease. The specialized skills that would be required to work in a highly alpha radiation contaminated facility would be available within the existing workforce on the Hanford Site. ERDF already is authorized via a ROD (EPA et al. 1995) to receive CERCLA waste meeting ERDF acceptance criteria generated on the Hanford Site. WIPP currently is operational, and TRU waste could be stored at CWC until the WIPP schedule could accommodate Hanford Site-generated waste.

Although any of the alternatives would be implementable, Alternative Two could be easier to implement in the near term because this alternative would not require the engineering, planning, and demolition activities necessary to implement Alternatives Three and Four. However, in the long term, implementation of Alternative Two could become less feasible, because S&M activities would need to become more costly, aggressive, and frequent.

None of the alternatives discussed in this report are expected to interfere with other nearby facility operations.

## 5.3 COST

Total costs for each alternative as described in Sections 4.2 through 4.4 are presented in Table 5-2.

Table 5-2. Total Costs for the 224-B Facility Removal Action Alternatives.

Alternative	Total Cost (\$1,000)	
	Present worth	Nondiscounted
Two – S&M	1,220	1,670
Three – D&D (Excluding Building Foundation and Underlying Soils/Structures)	16,490	16,750
Four – D&D (Including Building Foundation Underlying Soils/Structures to 1 Meter Below Foundation)	18,330	18,850

## 5.4 OTHER CONSIDERATIONS

In accordance with DOE NEPA policy, DOE CERCLA documents are required to incorporate NEPA values (e.g., analysis of cumulative, offsite, ecological, and socioeconomic impacts) to the extent practicable.

Cumulative impacts might occur in both the short term and long term because of the interrelationships between the 224-B Facility removal action and other 200 Areas activities, such as remediation of waste sites and groundwater, deactivation and D&D of surrounding facilities, and operation of waste treatment or disposal facilities. For this action, short-term cumulative impacts were considered in terms of both air quality and resource allocation. With appropriate work controls, airborne releases from the 224-B Facility were expected to be minor under all of the removal action alternatives, so the contribution to cumulative impacts on local and regional air quality would be minimal. With respect to resource allocation, Alternatives Two through Four as well as other 200 Areas activities would require resources in terms of budget, materials, and disposal space. The contribution to cumulative impacts would be less for Alternative Two and greater for Alternatives Three and Four, which would require substantially greater budget resources.

In the long term, the overall cumulative effect of the 224-B Facility removal action and other activities in the 200 Areas would be to enhance the protection of personnel, the public, and the environment, which is consistent with the values expressed by the regulators, stakeholders, affected tribes, and the public. Alternatives Two through Four would contribute to this enhanced protection, with Alternatives Three and Four creating the greatest and most long-term positive effect. None of the alternatives would be expected to adversely affect existing ecological or cultural resources or to have any socioeconomic impacts, including disproportionately high and adverse impacts to minority or low-income populations. Alternatives Two through Four would require an irreversible and irretrievable commitment of resources in the form of land area at ERDF for waste disposal, but the total quantity of waste generated and the associated land area required would be relatively small for Alternatives Two, larger for Alternative Three, and the greatest for Alternative Four. Alternative Three might require some amount of backfilling to cover the slab. Alternative Four also would require a commitment of resources for deep excavation and the clean fill material to backfill the site.

This page intentionally left blank.

## 6.0 RECOMMENDED ALTERNATIVE

The recommended removal action alternative for the 224-B Facility is Alternative Three – D&D (to grade, excluding building foundation and underlying soils/structures). This alternative would provide the best balance of protecting human health and the environment associated with the hazardous substance inventory within the facility, meeting the removal action objectives, and providing a cost-effective option.

Alternative One does not provide overall protection to human health and the environment. Alternative Two provides adequate overall protection of human health and the environment, but at an increasing cost over time. Additionally, Alternative Two would not remove the radioactive inventory within the facility. Therefore, neither of these alternatives is selected.

Alternatives Three and Four are judged to be comparable in terms of long-term protectiveness. Alternative Four potentially could provide additional long-term protection relative to Alternative Three if significant radiological inventory actually is located in the foundation. Alternative Three is comparable because this alternative leaves the stabilized facility foundation in place, thereby isolating any potential subsurface contamination remaining after removal of the main structure. Both Alternatives Three and Four would provide an end-state that does not preclude future actions beneath the 224-B Facility. Additionally, Alternative Three would incur significantly lower costs, and future remedial actions, if required, would require the removal of significantly smaller quantities of backfill material placed as a result of this removal action.

Environmental sampling will be conducted in conjunction with, or following, decontamination and demolition activities in order to assess whether cleanup and stabilization objectives have been achieved. Following analysis of sampling results DOE and EPA will jointly determine whether additional cleanup activities at the site should be deferred to a subsequent CERCLA remedial action, or taken under this removal action.

This page intentionally left blank.

## 7.0 REFERENCES

- 64 FR 61615, "Record of Decision: Hanford Comprehensive Land Use Plan Environmental Impact Statement (HCP-EIS)," Final Rule, *Federal Register*, Vol. 64, p. 61615, November 12, 1999.
- BHI-00139, *Environmental Restoration Disposal Facility Waste Acceptance Criteria*, Rev. 4, Bechtel Hanford, Inc., Richland, Washington
- BHI-01156, 2001, *224-B Facility Documented Safety Analysis*, Revision 1, Bechtel Hanford, Inc., Richland, Washington.
- DOE, 1993, *Executive Order 12580: Superfund Implementation*, EH-231-015/0593, Office of Environmental Guidance, dated May 1993, U.S. Department of Energy, Washington, D.C.
- DOE, 1994, *Secretarial Policy on the National Environmental Policy Act*, memorandum from H. O'Leary to Secretarial Offices and Heads of Field Elements, dated June 1994, U.S. Department of Energy, Washington, D.C.
- DOE/EIS-0222-F, 1999, *Final Hanford Comprehensive Land-Use Plan Environmental Impact Statement*, U.S. Department of Energy, Washington, D.C.
- DOE Order 451.1B, *National Environmental Policy Act Compliance Program*, as amended, U.S. Department of Energy, Washington, D.C.
- DOE and EPA, 1995, *Policy on Decommissioning of Department of Energy Facilities Under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA)*, May 22, 1995, U.S. Department of Energy and U.S. Environmental Protection Agency, Washington, D.C.
- DOE-RL, 1996, *Programmatic Agreement Among the U.S. Department of Energy Richland Operations Office, The Advisory Council on Historic Preservation, and the State Historic Preservation Office for the Maintenance, Deactivation, Alteration, and Demolition of the Built Environment on the Hanford Site*, Washington, DOE/RL 096-77, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- DOE-RL, 1998, *Hanford Site Manhattan Project and Cold War Era Historic District Treatment Plan*, DOE/RL-97-56, Rev. 1, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- DOE-RL, 1999a, *200 Areas Remedial Investigation/Feasibility Study Implementation Plan - Environmental Restoration Program*, DOE/RL-98-28, Rev. 0, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- DOE-RL, 1999b, *Richland Environmental Restoration Project Baseline - Multi-Year Work Plan, Volume 1: Richland Environmental Restoration Project Specification*, DOE/RL-96-105, Rev. 4, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- DOE/RL-91-28, *Hanford Facility Dangerous Waste Permit Application, Dangerous Waste Portion*, Rev. 5C, U.S. Department of Energy, Richland Operations Office, Richland, Washington.

- Ecology, EPA, and DOE, 1994, *Hanford Federal Facility Agreement and Consent Order*, 2 vols., as amended, State of Washington Department of Ecology, U.S. Environmental Protection Agency, and U.S. Department of Energy, Richland, Washington.
- EPA, Ecology, and DOE, 1995 and 2002, *Environmental Restoration Disposal Facility Record of Decision*, U.S. Environmental Protection Agency, State of Washington Department of Ecology, and U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- EPA, Ecology, and DOE, 1996, *U.S. Department of Energy Hanford Environmental Restoration Disposal Facility, Hanford Site, Benton County, Washington, Explanation of Significant Difference (ESD)*, U.S. Environmental Protection Agency, State of Washington Department of Ecology, and U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- Marske, S. G., CH2M Hill, Inc., to J. R. Robertson, Fluor Hanford, Inc., "Transmittal of 224-B Facility EE/CA Removal Alternative Cost Estimates Backup," dated November 3, 2003.
- Neitzel, D. A., 2002, *Hanford Site National Environmental Policy Act (NEPA) Characterization*, PNL-6415, Rev. 14, Pacific Northwest National Laboratory, Richland, Washington.
- OMB, 1992, "Guidelines and Discount Rates for Benefit-Cost Analysis of Federal Programs," Office of Management and Budget, Washington, D.C., Circular No. A-94, Retrieved July 31, 2002, from [http://www.whitehouse.gov/omb/circulars/a094/a94\\_appx-c.html](http://www.whitehouse.gov/omb/circulars/a094/a94_appx-c.html).
- RHO, 1985a, *Radiological Characterization of the 224-B Hot Cells*, SD-DD-TRP-002, Rockwell Hanford Operations, Richland, Washington.
- RHO, 1985b, *224-B Decontamination Project Plan*, SD-DD-PP-002, Rockwell Hanford Operations, Richland, Washington.