

START

0021625

ENGINEERING CHANGE NOTICE

Page 1 of 2
32

1. ECN 169216
Proj. ECN

2. ECN Category (mark one)	Supplemental <input type="checkbox"/>	Change ECN <input type="checkbox"/>	Supersedeure <input type="checkbox"/>
Cancel/Void <input type="checkbox"/>	Direct Revision <input checked="" type="checkbox"/>	Temporary <input type="checkbox"/>	Discovery <input type="checkbox"/>

3. Originator's Name, Organization, MSIN, and Telephone No. C. M. LOLL, Tank Farms Environmental Engineering, R1-51, 3-5039	4. Date April 28, 1992
--	---------------------------

5. Project Title/No./Work Order No. 241-A TANK FARM COOLING WATER SAMPLING AND ANALYSIS PLAN	6. Bldg./Sys./Fac. No. N/A	7. Impact Level REQ ^{comd 4/25/92} 1EQ
---	-------------------------------	---

8. Document Number Affected (include rev. and sheet no.) WHC-SD-WM-EV-077, REV. 0 (15 pages) ^{comd 4/25/92}	9. Related ECN No(s). N/A	10. Related PO No.
--	------------------------------	--------------------

11a. Modification Work <input type="checkbox"/> Yes (fill out Blk. 11b) <input checked="" type="checkbox"/> No (NA Blks. 11b, 11c, 11d)	11b. Work Package Doc. No. N/A	11c. Complete Installation Work N/A	11d. Complete Restoration (Temp. ECN only) N/A
Cog. Engineer Signature & Date			Cog. Engineer Signature & Date

12. Description of Change
THE ENTIRE DOCUMENT, WHC-SD-WM-EV-077, REV. 0, IS BEING REPLACED WITH WHC-SD-WM-EV-077, REV. 1



13a. Justification (mark one)	Criteria Change <input checked="" type="checkbox"/>	Environmental <input type="checkbox"/>	Facilitate Const. <input type="checkbox"/>
Design Error/Omission <input type="checkbox"/>	Design Improvement <input type="checkbox"/>	As-Found <input type="checkbox"/>	Const. Error/Omission <input type="checkbox"/>

13b. Justification Details
INCORPORATION OF COMMENTS WHICH WERE NOT PRESENTED AT THE TIME OF ORIGINAL RELEASE.

14. Distribution (include name, MSIN, and no. of copies) SEE ATTACHED DISTRIBUTION	RELEASE STAMP OFFICIAL RELEASE BY WHC DATE APR 29 1992 Sta #10
---	---

9 2 1 2 6 5 4 1 6 6 9

ENGINEERING CHANGE NOTICE

15. Design Verification Required [] Yes [X] No	16. Cost Impact				17. Schedule Impact (days) Improvement [N/A]]] Delay [1] WK]
	ENGINEERING		CONSTRUCTION		
	Additional	[N/A] \$	Additional	[N/A] \$	
	Savings	[] \$	Savings	[] \$	

18. Change Impact Review: Indicate the related documents (other than the engineering documents identified on Side 1) that will be affected by the change described in Block 12. Enter the affected document number in Block 19.

SDD/DD	[]	Seismic/Stress Analysis	[]	Tank Calibration Manual	[]
Functional Design Criteria	[]	Stress/Design Report	[]	Health Physics Procedure	[]
Operating Specification	[]	Interface Control Drawing	[]	Spares Multiple Unit Listing	[]
Criticality Specification	[]	Calibration Procedure	[]	Test Procedures/Specification	[]
Conceptual Design Report	[]	Installation Procedure	[]	Component Index	[]
Equipment Spec.	[]	Maintenance Procedure	[]	ASME Coded Item	[]
Const. Spec.	[]	Engineering Procedure	[]	Human Factor Consideration	[]
Procurement Spec.	[]	Operating Instruction	[]	Computer Software	[]
Vendor Information	[]	Operating Procedure	[]	Electric Circuit Schedule	[]
OM Manual	[]	Operational Safety Requirement	[]	ICRS Procedure	[]
FSAR/SAR	[]	IEFD Drawing	[]	Process Control Manual/Plan	[]
Safety Equipment List	[]	Cell Arrangement Drawing	[]	Process Flow Chart	[]
Radiation Work Permit	[]	Essential Material Specification	[]	Purchase Requisition	[]
Environmental Impact Statement	[]	Fac. Proc. Samp. Schedule	[]		[]
Environmental Report	[]	Inspection Plan	[]		[]
Environmental Permit	[]	Inventory Adjustment Request	[]		[]

19. Other Affected Documents: (NOTE: Documents listed below will not be revised by this ECN.) Signatures below indicate that the signing organization has been notified of other affected documents listed below.

Document Number/Revision	Document Number/Revision	Document Number/Revision
N/A		

20. Approvals

Signature	Date	Signature	Date
OPERATIONS AND ENGINEERING		ARCHITECT-ENGINEER	
Cog./Project Engineer * <i>Craig Hall</i>	4/28/92	PE	
Cog./Project Engr. Mgr. * <i>Joel Alar</i>	4/29/92	QA	
QA * <i>Tom W. Hales</i>	4/29/92	Safety	
Safety (POST REVIEW)*		Design	
Security		Other	
Proj. Prog./Dept. Mgr. * <i>DM Nguyen</i>	4/29/92		
Def. React. Div.			
Chem. Proc. Div.			
Def. Wst. Mgmt. Div.		DEPARTMENT OF ENERGY	
Adv. React. Dev. Div.		* <i>Joseph Brackman</i>	4/29/92
Proj. Dept.		<i>Rasmusen</i>	4/29/92
Environ. Div. <i>JM Kubala</i>	4/29/92	ADDITIONAL	
IRM Dept.			
Facility Rep. (Ops.) * <i>John Stetson</i>	4-29-92		
Other <i>TRAD Facility Eng.</i>	4/28/92		
<i>J.E. Hyatt</i>	4/29/92		
<i>Samphire's Mobil Labs</i>			

92126541670

SUPPORTING DOCUMENT

1. Total Pages ²¹ 20

2. Title

241-A COOLING WATER SAMPLING AND ANALYSIS PLAN

3. Number

WHC-SD-WM-EV-077

4. Rev No.

1

5. Key Words

Liquid effluent sampling, analysis, 241-A

6. Author

Name: C. M. Loll

Signature *Craig M Loll*

Organization/Charge Code 7C420/A&D11

7. Abstract

There are two main contributors to the 241-A Tank Farm liquid effluent that is discharged to the 216-B-3 Pond. The source, volumes and controls for these contributors are described to justify the sampling point and frequency for this stream. Sample collection methods, sample handling requirements, constituents for which the samples will be analyzed and the associated quantitation limits are specified in the plan.

8. PURPOSE AND USE OF DOCUMENT - This document was prepared for use within the U.S. Department of Energy and its contractors. It is to be used only to perform direct or integrate work under U.S. Department of Energy contracts. This document is not approved for public release until reviewed.

PATENT STATUS - This document copy, since it is transmitted in advance of patent clearance, is made available in confidence solely for use in performance of work under contracts with the U.S. Department of Energy. This document is not to be published nor its contents otherwise disseminated or used for purposes other than specified above before patent approval for such release or use has been secured, upon request, from the U.S. Department of Energy, Patent Attorney, Richland Operations Office, Richland, WA.

DISCLAIMER - This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

10. Authorized Manager's Name


J. A. Eacker

Signature *Joel Eacker*

Authorized Manager's Signature

Specify Distribution Limit External

11. RELEASE STAMP

OFFICIAL RELEASE 
 BY WHC
 DATE APR 29 1992
 Sta #10

9. Impact Level

1EQ

92126541671

APPROVED FOR PUBLIC RELEASE
 CW 4-29-92

**241-A TANK FARM COOLING WATER
SAMPLING AND ANALYSIS PLAN**

April 27, 1992

Tank Farms Environmental Engineering

9 2 1 2 6 5 4 1 6 7 3

TABLE OF CONTENTS

Acronyms/Abbreviations	3
1.0 INTRODUCTION	4
2.0 OBJECTIVES	4
3.0 SITE BACKGROUND	5
3.1 FACILITY DESCRIPTION	5
3.2 STREAM DESCRIPTION	5
3.2.1 CONDENSER COOLING WATER	6
3.2.2 CONDENSER FACILITY FLOOR DRAIN	6
3.2.3 AIR COMPRESSOR COOLING WATER	6
3.2.4 EMERGENCY COOLING WATER SYSTEM	10
3.3 RECEIVING SITE DESCRIPTION	11
4.0 RESPONSIBILITIES	11
5.0 SAMPLING LOCATION AND FREQUENCY	12
5.1 LOCATION	12
5.2 FREQUENCY	12
6.0 SAMPLING EQUIPMENT AND PROCEDURES	13
7.0 SAMPLE HANDLING AND ANALYSIS	15
REFERENCES	19

9 2 1 2 6 5 4 1 6 7 4

Acronyms/Abbreviations

COC	Chain-of-custody
DQO	Data quality objective
DST	Double-shell tanks
ECWS	Emergency cooling water system
ETP	Effluent Treatment Programs
EDMC	Environmental Data Management Center
Ecology	Washington Department of Ecology
HEIS	Hanford Environmental Information System
ICP	Inductively coupled plasma
QA	Quality Assurance
QAPjP	Quality Assurance Project Plan
QC	Quality Control
RCRA	Resource Conservation & Recovery Act
SAP	Sampling and Analysis Plan
S&ML	Sampling & Mobile Laboratory
SOW	Statement of work
SD	Supporting Document
TFEE	Tank Farms Environmental Engineering
TOC	Total organic carbon
TOX	Total organic halides
TPA	Tri-Party Agreement
VOA	Volatile organic analysis
WAC	Washington Administrative Code
WM	Waste Management
WHC	Westinghouse Hanford Company

9 2 1 2 6 5 4 1 6 7 5

1.0 INTRODUCTION

This Sampling and Analysis Plan (SAP) has been prepared for the 241-A Tank Farm Cooling Water effluent stream as required by the May 21, 1991 proposed amendments to the Hanford Federal Facility Agreement and Consent Order, (Ecology et al. 1989), otherwise known as the Tri-Party Agreement (TPA). In addition, Washington Department Of Ecology (Ecology) Consent Order No. ED-91NM-177, For the Permitting of Liquid Effluent Discharges Under the Washington Administrative Code (WAC) 173-216, requires the submittal of SAP's for the permitting of effluent wastewater streams.

This SAP documents the methods and frequency of sampling and the requirements for laboratory analysis, in order to determine the constituents of the 241-A cooling water wastestream. It has been developed in accordance with the Liquid Effluent Sampling Quality Assurance Project Plan, WHC-SD-WM-QAPP-011, Rev. 1 (WHC 1992). The QAPjP is intended to ensure that procedures are implemented and that the sampling and analysis work is performed to the proper level of control in order to meet the data quality objectives (DQO) which it describes. The SAP shall take precedence over the QAPjP in the implementation of specific responsibilities and methods, if discrepancies should exist.

2.0 OBJECTIVES

Sampling and analysis of 241-A cooling water wastestream is based on the following objectives.

- o Provide data on chemical and radiological constituents to calculate loading and rate of migration to support the impact assessment of continued discharge.
- o Provide data for Best Available Treatment - Economically Achievable evaluations and liquid effluent treatment system design, if needed.
- o Provide data to support dangerous waste designation for the liquid effluents, if needed.

All changes to the approved sampling and analysis plan shall be considered a class [II] change per the Hanford Tri-Party Agreement.

9 2 1 2 6 5 4 1 6 7 6

3.0 SITE BACKGROUND

The 241-A Tank Farm Complex is located along the east border of the 200 East Area of the Hanford Site, located in south-central Washington. The facility of discussion consists of four, 1 million gallon tanks and their auxillary systems, to which high-heat producing, high-level radioactive waste was sent and stored during metals processing campaigns at the Hanford Site.

3.1 FACILITY DESCRIPTION

Each of the 241-AY and -AZ Tank Farms, also known as the "aging waste" tank farms, has two underground double-shell tanks (DST) equipped with above-ground monitoring and control facilities. These DSTs are used for safe storage of high-level radioactive waste. The primary tank is 75 ft in diameter and the secondary tank is 80 ft in diameter. The dome is 45 ft 9 in. high at the dome center. Each tank has an internal steam coil. Although all four aging-waste tanks are equipped to store aging waste, only the two 241-AZ tanks currently contain aging waste. The 241-AY tanks, which contain other wastes, were completed in 1970. Tank 102-AZ was completed in 1974 and tank 101-AZ was finished in 1977. An aerial view of the tanks showing the position of the tanks relative to each other and the surrounding area is shown in Figure 2-1.

The aging waste tanks have a ventilation system and steam coils that are designed to allow heating the waste to maintain a desired liquid temperature or boiloff rate. The main purpose of the 241-A tank farm cooling water wastestream is to provide a cooling mechanism in this ventilation system to allow contaminated water vapors to be condensed and returned to the tank. Three shell and tube condensers are housed in the 241-A-401 Building located southeast of the tanks. The building is divided into the condenser cells, hot pipe gallery and the operating gallery where the raw water piping, instruments and controls are accessible.

3.2 STREAM DESCRIPTION

The 241-A tank farm cooling water stream is made up of one major contributor, the condenser cooling water, and several smaller ones. The flow from all of the contributors merges at the warm water sump. This stream flow is then directed to the 216-B-3 Pond for soil column and evaporative disposal. The configuration of the contributors is illustrated in Figure 2-2. The following sections present a detailed description of each of the contributors.

92126341677

3.2.1 CONDENSER COOLING WATER

Exhaust gases from the aging-waste tank ventilation system are directed to the shell side of the condensers located in the 241-A-401 Building condenser facility. This contaminated vapor is maintained at a slight vacuum when compared with atmospheric pressure. Cooling water flows in the tube side of the condensers to allow heat transfer and the condensation of water vapors contained in the exhaust gases. The condensed water vapors are then returned to the aging-waste system.

The cooling water flowrate averages about 600 gal/min through the condensers, which represents over 98% of the total stream flow. The water is maintained at a positive pressure to ensure flow in the cooling water system. This pressure difference across the tubes (cooling water at the high pressure) precludes a leak of contaminants into the cooling water system. A leak would actually flow out of the cooling water system and into the condensed water vapors from the ventilation system.

A proportional sampler is connected to the condenser cooling water discharge line in the 241-A-401 Building operating gallery as it flows into the warm water sump. A beta-gamma radiation monitor also exists on this line and is used to detect the presence of radionuclides in the stream. In the case of an alarm of this monitor, the wastestream flow to B-3 Pond is manually stopped and the emergency cooling water system (ECWS) is put into use.

3.2.2 CONDENSER FACILITY FLOOR DRAIN

The 241-A-401 Building condenser facility floor drain line is fed from drains in the operating gallery. Discharges to these drains consist of water from the service sink and safety shower. This flow is sporadic in nature and attributes <1 gal/d on a normal basis. No hazardous materials or chemicals are stored or used in the 241-A-401 operating gallery.


3.2.3 AIR COMPRESSOR COOLING WATER

Many of the monitoring instruments in the 241-A tank farm, including level and pressure indicators, use compressed instrument air to function. Compressed air is also used in other equipment and processes. A supply of compressed air is essential for proper operation of the 241-A tank farm.

The air compressors require cooling water to keep the equipment at the proper operating temperature. Insufficient cooling water would allow the reciprocating parts to overheat and be damaged. The cooling water used is raw water from Columbia River that is supplied from the 200 East Area Powerhouse. If the raw water supply were interrupted sanitary water could be used for compressor cooling.


9 2 1 2 6 5 4 1 6 7 8

Figure 2-1 241-AY and 241-AZ Tank Farms



92126541679

Figure 2-2 Cooling Water Stream Configuration

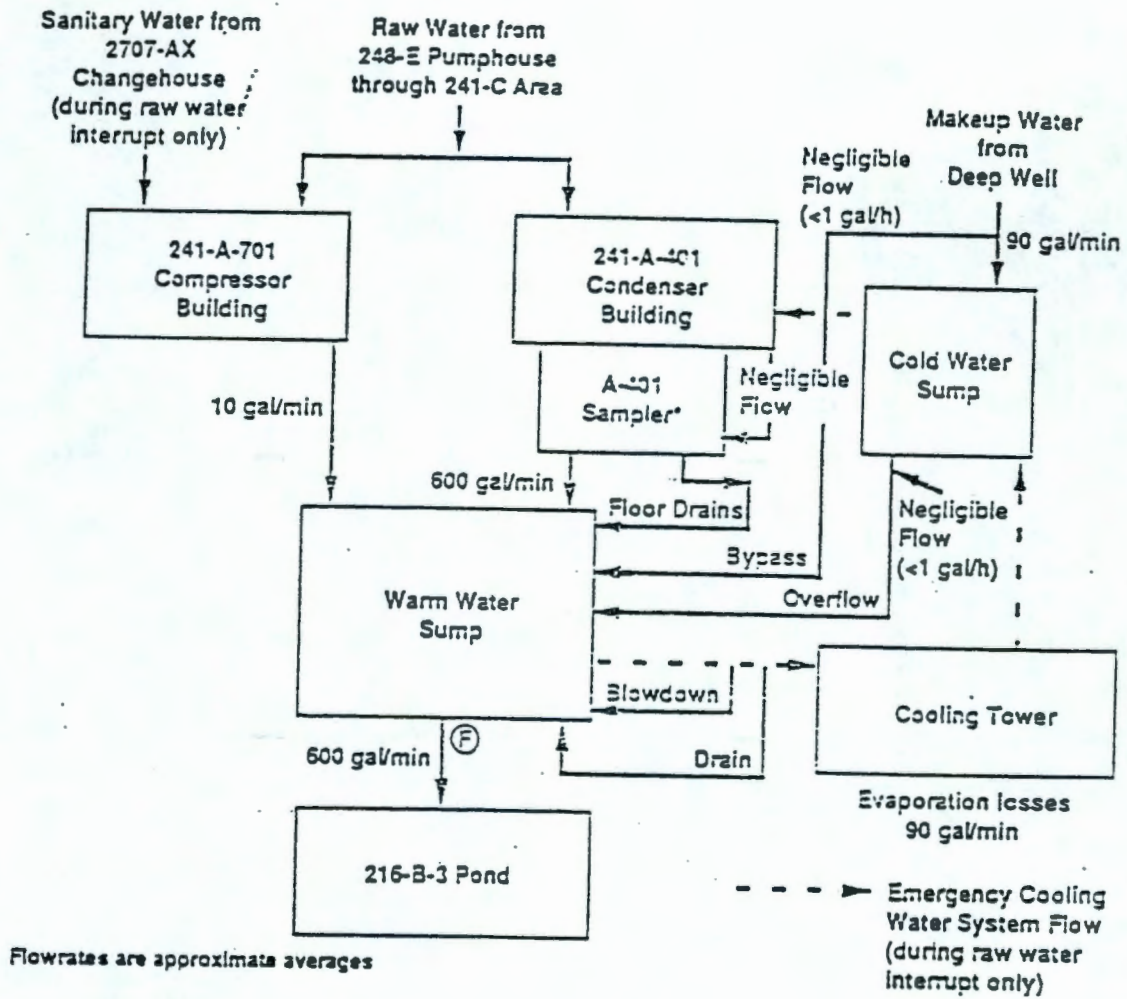


92126541680

216-B-3 Pond System

WHC-SD-WM-EV-077
REV. 1

Figure 2-3 216-B-3 Pond System

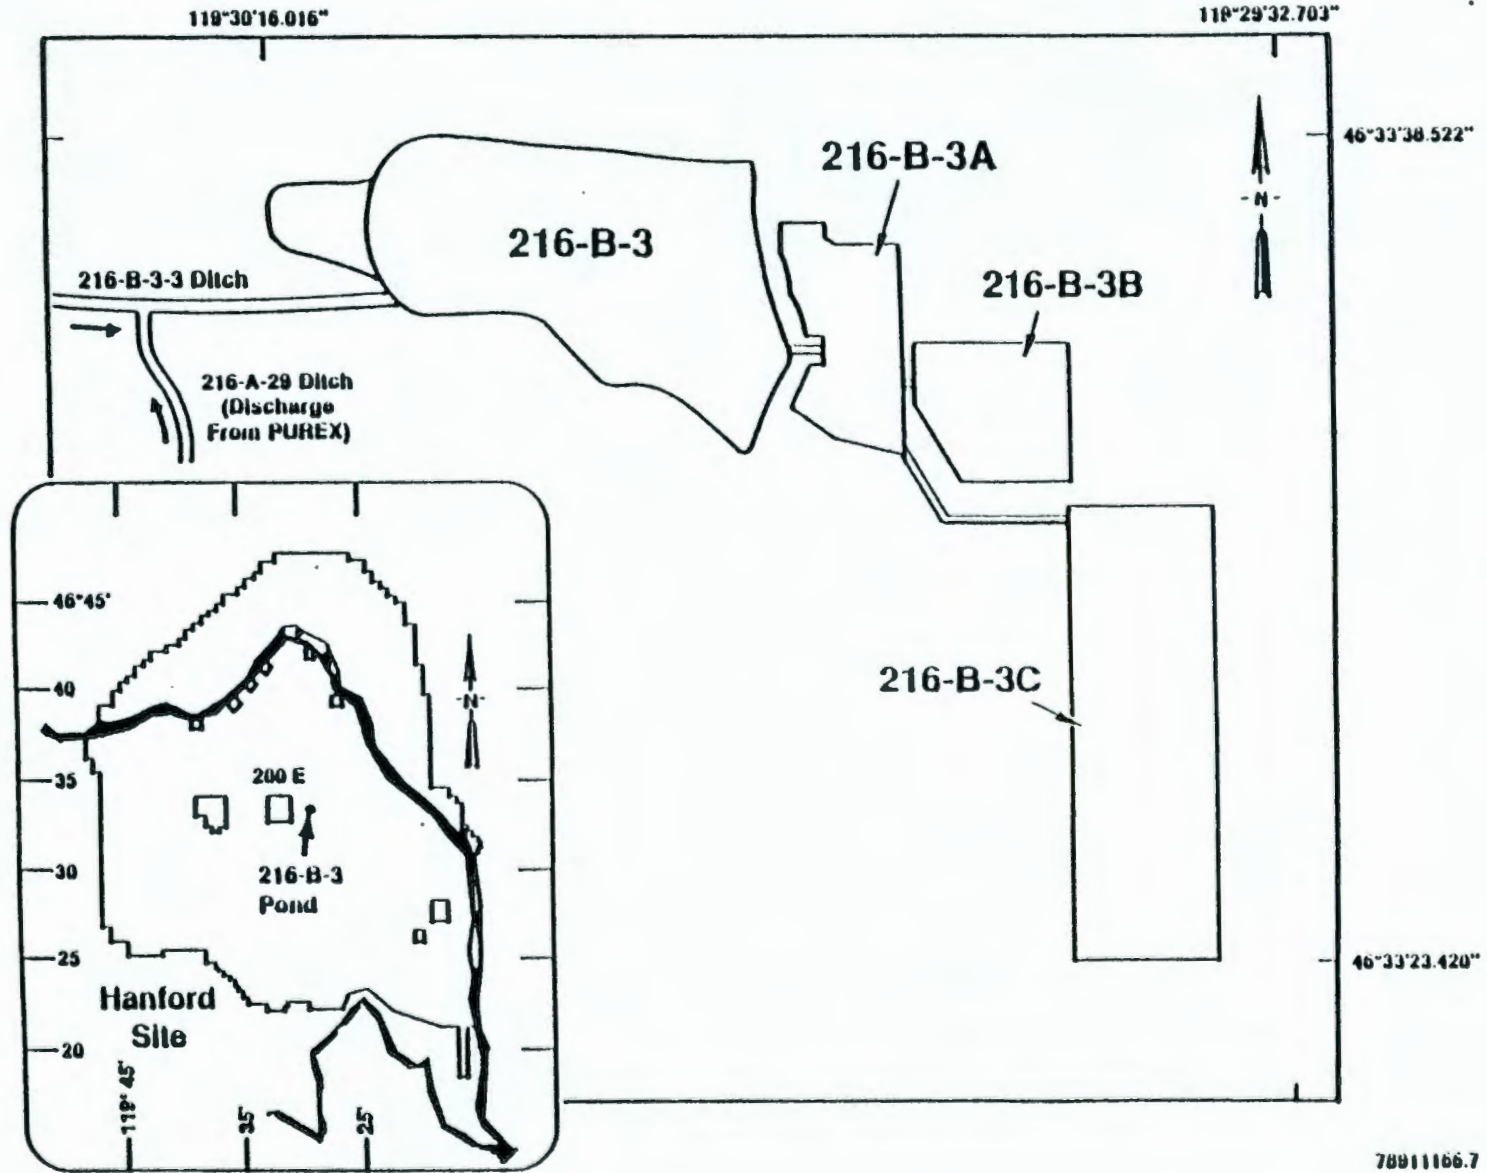

9

9 2 1 2 6 5 4 1 6 8 1

Two air compressor are located in the 241-A-701 Building. The air compressor stream consists of water that is not in proximity to any waste or hazardous materials. No chemicals are added to the cooling water. Cooling water discharge is estimated at approximately 10 gpm and is consistent even when the two compressors switch operating status. One discharge line connects the compressor building with the warm water sump.

These compressors are scheduled to be replaced by July 1992. The new compressors will have closed loop cooling, eliminating compressor cooling water discharge.

Other contributors to the compressor cooling water stream include blowdown from the air receiver and dryer. The source of the water in the blowdown is water vapor from the air that condenses as the air is compressed, changing the vapor saturation level. Flow contributions from these sources are intermittent and small (<1 gpm) when they occur. The impact is negligible both in terms of water volume and contaminant increase.

3.2.4 EMERGENCY COOLING WATER SYSTEM

The ECWS is intended to provide cooling water to the condensers located in the 241-A-401 Building during an interruption of the raw water supply. The system involves the use of a closed-loop operation that includes a cooling tower as the source of heat removal capabilities. During operation of this system, cooling water from the condensers flows in the normal configuration to the warm water sump. The route of the cooling water is changed to then flow to the cooling tower. Evaporation and heat transfer to the air then occurs in the cooling tower and lowers the cooling water temperature. The cooling water is then returned to the cold sump where 90 gal/min of makeup water from a deep well is added to offset evaporation losses. The water from the cold water sump is then returned to the condensers for reuse in the system.

The contributors to the cooling water wastestream from the ECWS include the cold water sump overflow, makeup water bypass, ECWS blowdown, and the ECWS drain. The overflow line originates at the cold water sump and drains to the warm water sump. A bypass line exists to allow make-up water to be added directly to the warm water sump. The blowdown and drain lines originate from the warm water line to the cooling tower. Both of these lines drain to the warm water sump when in use. The use of the blowdown line leads to some discharge to B-3 Pond with makeup water brought in at the cold water sump.

The ECWS is normally inactive and makes no flow addition to the 241-A tank farm cooling water wastestream. The system is functionally tested on a frequency of once per month. Short-term raw water outages at a frequency of once or twice a year have occurred in the past, forcing operation of the ECWS. The system is also used once or twice a year to allow maintenance of the raw water system.

92126541682

3.3 RECEIVING SITE DESCRIPTION

The 216-B-3 Pond System consists of a series of four earthen, unlined, interconnected ponds and the 216-B-3-3 Ditch. This network of ditches and ponds receives miscellaneous wastewater effluents from several of the processing facilities on the Hanford Site.

All of the wastewater effluents being discharged to the B Pond System travel through the 216-B-3-3 Ditch. This ditch is approximately 3,700 feet long, 30 ft wide at ground level, 6 ft wide at the bottom, and 6 to 12 ft deep.

Water discharged to the 216-B-3-3 Ditch flows directly into the 216-B-3 Pond System. The first pond, or lobe, is the 216-B-3 Pond. It was placed into service in 1945, and covers a surface area of approximately 35 acres, anywhere from 2 to 20 ft deep. Overflow from this first lobe runs into the second lobe, 3A. This lobe covers approximately 11 acres and is about 2.0 ft deep. Overflow from 3A runs into the 3C Pond, which has a designed surface area of 41 acres. This lobe has eight, parallel trenches, approximately 8 to 14 ft wide and 4 ft deep, cut into the bottom of it to increase percolation into the soil. At the present time, water covers about 1/3 the trench area within the lobe.

Flow between the ponds is via galvanized, corrugated, steel pipes, and is controlled by downward-opening slide gates. A network of groundwater monitoring wells has been established around the B Pond System to measure water levels, obtain groundwater samples, and evaluate aquifer properties. Liquid levels within the ponds are measured with staff gages, and the flowrate in the 216-B-3-3 Ditch is measured with a flume and flowmeter and recorded on a stripchart. The pond liquid levels, gate settings, and cumulative flowmeter readings are recorded daily.

4.0 RESPONSIBILITIES

Sampling will be performed by technicians from the Sampling & Mobile Laboratories (S&ML) group. All sampling will meet the quality assurance requirements of SW-846 (latest promulgated version). The sampling group technicians have the proper training and experience necessary to perform protocol sampling. This includes training in sample security, preservation and shipping, and maintaining a field logbook.

A laboratory will be selected by Effluent Treatment Programs (ETP) to perform analysis of samples taken under the Hanford liquid effluent program. This laboratory must meet the criteria of this Sample and Analysis Plan and the QAPjP (latest revision). ETP, or its designee, shall coordinate sample shipment to the selected laboratory with the sampling group. Data from the analyses will be validated by a qualified contractor chosen by ETP. Data will be validated according to the approved WHC procedure.

9 2 1 2 6 5 4 1 6 8 3

Tank Farm Environmental Engineering (TFEE) is responsible for preparation and maintenance of this plan. Any changes required by changes to the process, sampling method or parameters to be analyzed will be initiated by TFEE.

The TFEE engineer appointed by the manager as responsible for liquid effluents will be the sampling task leader. Responsibilities include scheduling the sampling according to the frequency established in this document, ensuring that appropriate equipment and personnel will be available for the sampling and that sampling is done according to established procedures.

TFEE will receive the validated data package and ensure that the data is filed with the Environmental Data Management Center (EDMC). TFEE is responsible to evaluate the data for any significant changes from previous sampling activities or expected results.

5.0 SAMPLING LOCATION AND FREQUENCY

5.1 LOCATION

Total stream composition data is the most valuable in meeting the objectives stated in Section 1.0. The contributors to this stream are not used in waste processing operations, are not used in areas subject to hazardous materials spills and are unaltered from their common source. None of the contributors varies enough in quantity or characteristics to warrant sampling at the various sources. Individual contributor sampling would not provide additional useful data in meeting the stated objectives.

Grab samples of the combined stream can be obtained in the warm water sump. Grab samples are justified for this stream since the contributors are consistent in source, flowrate and operation. The only variation to the stream is when the ECWS is used. This will be addressed by taking samples under both operating conditions. Based on this justification only combined stream grab samples will be taken.

5.2 FREQUENCY

Four samples of the cooling water under normal operation (raw water cooling) will be taken within one year following approval of this document to provide a baseline characterization. Two samples of the cooling water during ECWS operation will also be taken in the same time period. Baseline samples shall be at least one month apart. Unless the baseline suggests otherwise, a protocol sample of the 241-A Tank Farm wastestream will be taken once each year thereafter. The contributors to the stream are consistent in the current operational mode and no change in operating status is expected. If there is a major change in stream configuration two samples will be taken to assess any changes to the overall stream.

9 2 1 2 6 5 4 1 6 8 4

6.0 SAMPLING EQUIPMENT AND PROCEDURES

Sampling of the 241-A effluent from the warm water sump will be done using the dipper method as described in SW-846. In this method the sump cover will be removed and the cup lowered into the sump by a pole. When the cup has filled as much as possible, it is retrieved from the sample pit and the prescribed sample bottles are filled with the sampled liquid. This is repeated as necessary until all the sample bottles are full. A formal sampling procedure for this stream is being developed by TFEE and the S&ML. The procedure will be completed prior to the first sampling. The sampling will be performed by technicians trained in all phases of RCRA protocol, according to the requirements of SW-846, including sampling techniques, preservation, labeling and documentation. There is not preventive maintenance required for this sampling equipment.

Field measurements will be made for conductivity and pH at the time of sampling. The results of the field measurements are entered into the sampling logbook.

Field blanks, trip blanks and duplicate samples will be used as part of the Quality Control (QC) program for this sampling activity. The QC samples will be taken as described in the QAPjP, Section 10.0, and the information below.

Field blanks will be used as part of the QA/QC program. Volatile organic analysis (VOA), semi-VOA, and inductively coupled plasma (ICP) metal field blanks will be prepared for each baseline sampling event. The bottles will be preserved as specified for these analyses. Each bottle will be opened in the field and filled with pure reagent water. The blanks will then accompany the samples for transport, handling and analysis.

A VOA trip blank will be taken during each sampling activity. The bottles will be preserved as specified for these analyses. Each bottle will be filled and sealed then accompany the batch of containers to the sampling site. The blank will remain unopened in the field and return with the sample containers to the lab.

Duplicate samples of this stream constituents will be taken during one of the first two sampling events. The duplicate samples will be taken by the same method and handled in the same fashion. The sampling of the 241-A effluent will be coordinated with the other Tank Farm sampling activities so that there will be duplicate sampling for each of the first two batches. Additional duplicate sampling will be determined based on the results of the first two batches.

Sample bottles shall be new commercially available certified precleaned glass or plastic bottles. The sample volumes and number of containers are prescribed by the analytical laboratory and are subject to change. Tentative sample volumes for the samples are:

- o 125 ml plastic containers with teflon¹ lined cap, no preservative for anions
- o 500 ml plastic container with teflon lined cap, pH<2 by nitric acid preservative for Inductive Coupled Plasma Metals
- o 250 ml plastic containers with teflon lined cap, pH<2 by nitric acid preservative for Atomic Absorption Metals
- o 500 ml plastic container with teflon lined cap, pH<2 by nitric acid preservative for mercury
- o 40 ml amber glass containers with septum cap (teflon lined), for Volatile Organics
- o 1 liter amber glass containers with teflon lined cap for Semi-volatile organics
- o 250 ml amber glass container with teflon lined cap, pH<2 by sulfuric acid for TOC
- o 500 ml plastic container with teflon lined cap for solids
- o 250 ml plastic container for pH and conductivity
- o 125 ml plastic container with teflon lined cap, pH<2 with sulfuric acid for ammonia
- o 1 liter plastic container with teflon lined cap, pH>12 with sodium hydroxide for cyanide
- o 1 liter plastic containers with teflon lined cap preserved with 2 ml nitric acid for alpha, beta, and radionuclides
- o 1 liter glass containers for phenols

Containers for VOA, TOX and TOC samples shall be filled without bubble formation and without leaving a head space.

¹ Teflon is a trademark of the DuPont de Nemours & Co, Wilmington, Delaware.

9 2 1 2 6 5 4 1 6 8 6

Sample labels shall be filled out and affixed to the containers at the time of sampling. These labels will be supplied by the sampling team. The labels shall include at least the following information:

- o sample identification number
- o person collecting the sample
- o date and time of sample collection
- o place of sample collection
- o any field observations, i.e., weather
- o sample matrix, i.e., soil, water, etc.

A unique sample identification number shall be used for each sample. Sample numbers will be obtained from the Hanford Environmental Information System (HEIS) or an equivalent database.

The sample bottles shall be cleaned and radiologically surveyed for off-site release. The released sample containers shall then be bagged and re-bagged. The samples will be placed in a cooler containing ice. The cooler shall become part of the sample packaging and shall have tamper evident tape placed over its opening.

A logbook shall be maintained which contains information pertinent to the sampling activities. Entries are to contain the sample point, sample number, container volumes, date and time of collection, field measurements, any field observations, transportation documentation, and signatures of personnel responsible for observations. The S&ML group will control and maintain the logbooks.

Until a liquid effluent database accessible to the regulatory agencies is developed, sample data will be sent to the EDMC and the agencies will be notified accordingly. The data will be part of the administrative record for the associated Tri-Party agreement milestone.

7.0 SAMPLE HANDLING AND ANALYSIS

All samples will be handled and transported to the laboratory in a manner to ensure that the integrity of the samples will be protected. Sample handling documentation will be verified by S&ML. Packaging and shipping requirements are specified in Section EII 5.11 of the Environmental Investigations and Site Characterization Manual (WHC 1989).

Traceability of samples obtained during the sampling activity will be controlled as specified in the QAPjP, Section 6.0. A chain-of-custody (COC) form will be filled out for the samples at the time of sampling and will accompany each sample. A sample may consist of several containers. The COC will account for each container. When more than one person is involved in sampling, one person shall be designated and only that person signs as sampler. This person is the custodian until the samples are transferred to

another location or group and shall sign when releasing the samples to the designated receiver.

The approved laboratory shall designate a sample custodian and a designated alternate responsible for receiving all samples. The sample custodian or his alternate shall sign and date all appropriate receiving documents at the time of receipt and at the same time initiate an internal COC form using documented procedures.

Analytical procedures for protocol samples shall meet the quality assurance requirements of SW-846 and of the Liquid Effluent Sampling QAPjP (latest revision). The Statement Of Work (SOW) for completing the analysis shall require the approved laboratories to have existing standard operating procedures and to submit any changes in their procedures during the contract term to ETP, or its designee, for approval. The SOW will describe the approval mechanism for any such changes. The approved laboratory procedures shall describe data reduction, verification, and reporting. Any necessary corrective action shall be as outlined in the QAPjP, Section 14.0.

The constituents to be analyzed for are listed in Table 1. The analyte list is based on the QAPjP (latest revision) with some additional analytes. Quality assurance objectives including the analytical method, precision, accuracy and completeness shall be as detailed in the QAPjP. These criteria may be adjusted by agreement with the proposed laboratory prior to final approval of the contract or work order.

9 2 1 2 6 5 4 1 6 3 8

TABLE 1
SAMPLE ANALYTE LIST

- 9 2 1 2 6 5 4 1 6 8 9
- **Metals:** All metals listed in Appendix IX, as follows:
 - o **TOTAL METALS BY ICP:** EPA Method 3010/6010 - analyte list as specified in the method. Samples will be unfiltered unless turbid.
 - o **TOTAL METALS BY GRAPHITE FURNACE ATOMIC ABSORPTION:**
 - antimony....3020/7041
 - arsenic.....3020/7060
 - chromium....3020/7191
 - berillium...3020/7091
 - cadmium.....3020/7131
 - lead.....3020/7421
 - thallium....3020/7841
 - mercury.....3020/7470 (cold vapor)
 - **VOLATILE ORGANICS BY GAS CHROMATOGRAPHY - MASS SPECTROSCOPY (GC-MS) :** EPA Method 8240 (gc/ms - capillary column (purge and trap)). Include all analytes listed in the method.
 - **SEMI-VOLATILE ORGANICS BY GAS CHROMATOGRAPHY - MASS SPECTROSCOPY (GC-MS):** EPA Method 8270 (gc/ms - capillary column). Include all analytes listed in the method.
 - **POLYCHLORINATED BIPHENYLS GAS CHROMATOGRAPHY:** EPA Method 3510/8080 or 3520/8080 - clean-up via method 3620. This method is being requested to target PCB's; therefore the compound chosen for the surrogate spikes should be optimized for PCBs.
 - **TOTAL RECOVERABLE OIL AND GREASE (GRAVIMETRIC, SEPARATORY FUMMEL EXTRACTION):** EPA Method 9070.
 - **TOTAL ORGANIC CARBON (OXIDATION, INFRARED OR FLAME IONIZATION DETECTOR):** EPA Method 9060.
 - **TOTAL ORGANIC HALOGENS (CARBON ADSORPTION, MICOCOULOMETRIC - TITRATION DETECTOR):** EPA Method 9020.
 - **TOTAL PHENOLS:** EPA Method 420.
 - **COMMON ANIONS BY COLUMN CHROMATOGRAPHY:** EPA Method 9056 of 300 series. Target all analytes specified by this method.
 - **AMENABLE CYANIDE:**

- **AMMONIA:** EPA Method 350.5.
- **SECONDARY WATER QUALITY PARAMETERS AND OTHER PARAMETERS OF INTEREST:**
 - pH by EPA Method 9040.
 - Specific conductance/Total Dissolved Solids by EPA Method 9040.
 - Chemical Oxygen Demand by PA Method 410.
 - Biological Oxygen Demand by EPA Method 405.1
 - Alkalinity by EPA Method 310.1.
 - Acidity by EPA Method 305.1.
 - Fecal coliforms by method SM 908C.
 - Total coliform by method SM 908A.
- **RADIOCHEMICAL ANALYSIS:**
 - Total Alpha and Beta by EPA Method 9310 (SW-846)
 - ²⁴¹Pu by EPA Method 00-07
 - ¹⁰⁶Ru and ¹³⁷Cs by gamma spectrometry
 - ⁹⁰Sr by EPA Method SR-05

9 2 1 2 6 5 4 1 6 9 0

REFERENCES

- Ecology, EPA, and DOE, 1989, Hanford Federal Facility Agreement and Consent Order, Washington State Department of Ecology, U.S. Environmental Protection Agency, U.S. Department of Energy, Olympia, Washington.
- EPA, 1986, Test Methods for Evaluating Solid Wastes, SW-846, 3rd edition, U.S. Environmental Protection Agency/Office of Solid Waste, Washington D. C.
- EPA, 1991, Code of Federal Regulations, 40 CFR 264, Appendix IX, U.S. Environmental Protection Agency, Washington D. C.
- WHC, 1989, Environmental Investigations and Site Characterization Manual, WHC-CM-7-7, Section 5.11, Westinghouse Hanford Co., Richland, Washington.
- WHC, 1992, Liquid Effluent Sampling Quality Assurance Project Plan, WHC-SD-WM-QAPP-011, Rev. 1, Westinghouse Hanford Co., Richland, Washington.

9 2 1 2 6 5 4 1 6 9 1

INFORMATION RELEASE REQUEST

References:
WHC-CM-3-4

COMPLETE FOR ALL TYPES OF RELEASE

Purpose		New ID Number <p style="text-align: center;">N/A</p>	
<input type="checkbox"/> Speech or Presentation <input type="checkbox"/> Full Paper (Check only one suffix) <input type="checkbox"/> Summary <input type="checkbox"/> Abstract <input type="checkbox"/> Visual Aid <input type="checkbox"/> Speakers Bureau <input type="checkbox"/> Poster Session <input type="checkbox"/> Videotape	<input type="checkbox"/> Reference <input type="checkbox"/> Technical Report <input type="checkbox"/> Thesis or Dissertation <input type="checkbox"/> Manual <input type="checkbox"/> Brochure/Flier <input type="checkbox"/> Software/Database <input type="checkbox"/> Controlled Database <input checked="" type="checkbox"/> Other	Existing ID Number (include revision, volume, etc.) <p style="text-align: center;">WHC-SD-WM-EV-077 Rev. 1</p>	
		If previously cleared, list ID number <p style="text-align: center;">N/A</p>	
		Date Release Required <p style="text-align: center;">04/28/92</p>	

Title 241-A TANK FARM COOLING WATER SAMPLING AND ANALYSIS PLAN	Unclassified Category UC-	Impact Level 1EQ
--	-------------------------------------	----------------------------

COMPLETE FOR SPEECH OR PRESENTATION

Title of Journal N/A	Group or Society Sponsoring N/A		
Date(s) of Conference or Meeting N/A	City/State N/A	Will proceedings be published? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Will material be handed out? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Title of Conference or Meeting N/A			

CHECKLIST FOR SIGNATORIES

Review Required per WHC-CM-3-4	Yes	No	Reviewer	Signature	Date
			Name (printed)		
Classification/Unclassified Controlled Nuclear Information	<input type="checkbox"/>	<input checked="" type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
Patent - General Counsel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B.D. Williamson	<i>B.D. Williamson for (per telegram)</i>	4/29/92
Legal - General Counsel	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B.B. Williamson	<i>B.B. Williamson for (per telegram)</i>	4/29/92
Applied Technology/Export Controlled Information or International Program	<input type="checkbox"/>	<input checked="" type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
WHC Program	<input checked="" type="checkbox"/>	<input type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
Communications	<input type="checkbox"/>	<input checked="" type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
DOE-RL Program	<input checked="" type="checkbox"/>	<input type="checkbox"/>	JE Newson	<i>J.E. Newson</i>	4/28/92
Publication Services	<input checked="" type="checkbox"/>	<input type="checkbox"/>	M.K. Oldfield	<i>M.K. Oldfield</i>	4/28/92
Other Program	<input type="checkbox"/>	<input checked="" type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
References Available to Intended Audience	<input checked="" type="checkbox"/>	<input type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92
Transmit to DOE-HQ/Office of Scientific and Technical Information	<input type="checkbox"/>	<input checked="" type="checkbox"/>	J.A. Eacker	<i>Joel A Eacker</i>	4/29/92

Information conforms to all applicable requirements. The above information is certified to be correct.

Author/Requestor (Printed/Signature) C. M. Lott <i>Craig M Lott</i>	Date 4/28/92
Responsible Manager (Printed/Signature) J. A. Eacker <i>Joel A Eacker</i>	Date 4/29/92
Intended Audience <input type="checkbox"/> Internal <input type="checkbox"/> Sponsor <input checked="" type="checkbox"/> External	

<p>INFORMATION RELEASE ADMINISTRATION APPROVAL STAMP</p> <p>Stamp is required before release. Release is contingent upon resolution of mandatory comments.</p> <div style="text-align: center;">  </div>
Date Received 4-29-92 <i>ew</i>

92126541692

DISTRIBUTION SHEET

To:
DISTRIBUTION

From:
CM LOLL

Date:
4/29/92

Project Title/Work Order:

241-A TANK FARM COOLING WATER SAMPLING & ANALYSIS PLAN

EDT No.:

ECN No.: 169216

Name	MSIN	With Attachment	ED1/ECN & Comment	EDT/ECN Only
GT BERLIN	R1-62	X		
LP DIEDEKER	T1-30	X		
RA DODD	R1-51	X		
GL DUNFORD	R1-51	X		
JA EACKER	R1-51	X		
RV GUTIERREZ	S5-03	X		
JE HYATT	S0-61	X		
CM LOLL	R1-51	X		
J MCCLEES	R2-95	X		
RA MEZMARICH	S0-61	X		
JE NEWSON	R2-62	X		
DM NGUYEN	R1-48	X		
JM NICHELS	T1-30	X		
RW OLDHAM	H4-57	X		
RK P'POOL	T1-30	X		
TE WHELAN	S1-57	X		
INFO. RELEASE ADM.	R1-08	X		

9 2 1 2 6 5 4 1 6 9 3